

“Stay Connected” with



Solar Power Components

a PennEngineering® Company

“Coined”  
edges prevent  
cable damage





## HEYClip™ SunRunner® Cable Clips for 1-2 Cables


Double-Compression, Straight-thru Design

PANEL THICKNESS CLAMPING RANGE				WIRE DIAMETER RANGE	PART NO.		DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum	Maximum				304	316		A x B		C	
in.	mm.	in.	mm.		Stainless	Stainless			in.	mm.	
<b>SunRunner Clip</b> - for panels up to .090" (2,3 mm) thick											
.06	1,4	.09	2,3	.20" (5,1 mm)- .33" (8,3 mm) each cable	S6405	S6490	SunRunner® Clip 100 Pack	.97 x .50	24,6 x 12,7	.39	9,9
					S6445	S6495	SunRunner® Clip Bulk				
<b>SunRunner Vidrio™ Clip</b> - for GLASS panels up to .250" (6,4 mm) thick <span style="float: right;">NEW PRODUCTS</span>											
.13	3,2	.25	6,4	.20" (5,1 mm)- .33" (8,3 mm) each cable	S6460	-	SunRunner® Vidrio™ Clip 100 Pack	.99 x .52	25,1 x 13,2	.45	11,4
					S6500	-	SunRunner® Vidrio™ Clip Bulk				
<b>SunRunner EZ Clip</b> - for panels up to .250" (6,4 mm) thick											
.09	2,3	.25	6,4	.20" (5,1 mm)- .33" (8,3 mm) each cable	S6407	-	SunRunner® EZ Clip 100 Pack	.97 x .50	24,6 x 12,7	.41	10,4
					S6447	-	SunRunner® EZ Clip Bulk				


\*Can accommodate up to three .33" (8,3 mm) diameter cables.



SunRunner®



SunRunner® Vidrio™

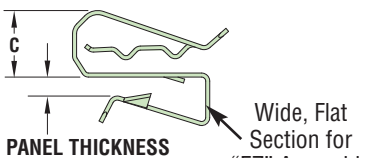

SunRunner® EZ

SunRunner® EZ with (optional) UL Approved SunBundler (page 1-11) looped through slot

- Heyco's SunRunner and SunRunner EZ's robust "double-compression" design securely holds from (1) 12 gauge USE-2 to (2) 10 gauge PV-1000V solar wires.
- Also for use with other cables from .20" (5,1 mm) to .33" (8,3 mm) in diameter.
- Heyco SunRunner Clips are designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels.**
- Generous lead-in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Constructed from corrosion resistant 304 stainless steel, not for use in a marine salt water environment.
- 316 stainless steel now available for marine and other harsh environments.
- **SunRunner Vidrio™ is designed to mount directly onto the glass panel with compression force only.** Will not harm the glass surface, and the black color meets many HOA requirements!
- The TPE coating on the SunRunner Vidrio™ provides an electrically insulated surface.
- **SunRunner EZ's are designed for thicker module frames** as well as racking – accommodates profiles up to .250" (6,4 mm) thick!

Material .025" thick 304 or 316 stainless steel  
 Certifications Certified by UL for Compliance with both Canadian and US Requirements under File E54523  
 Temperature Range -40°F (-40°C) to 572°F (300°C)

Quick  
Specs