

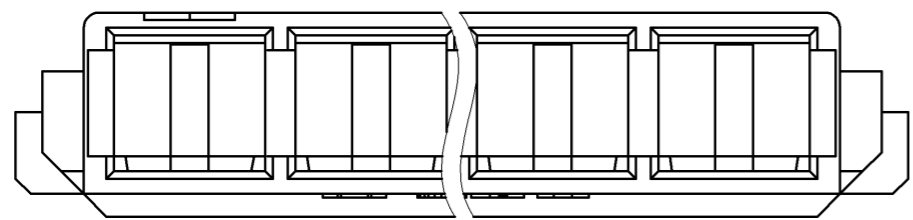
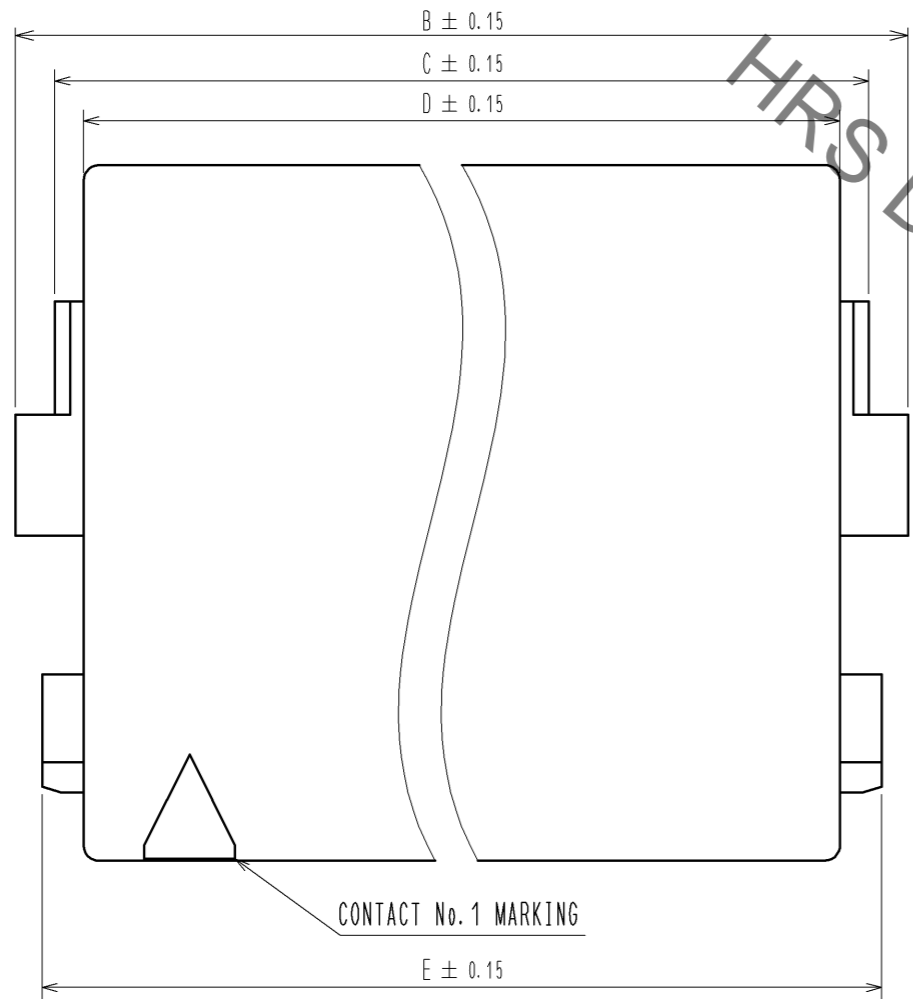
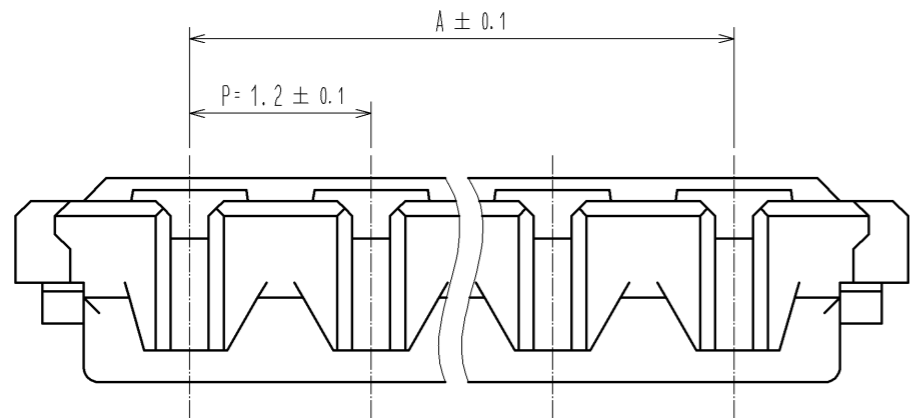
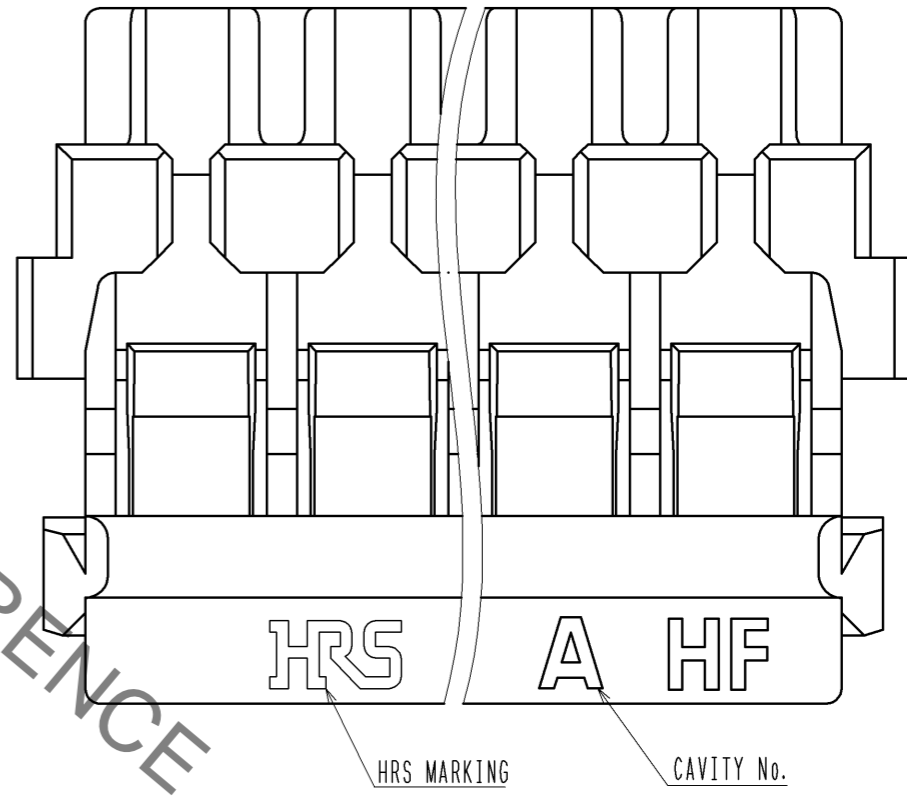


May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

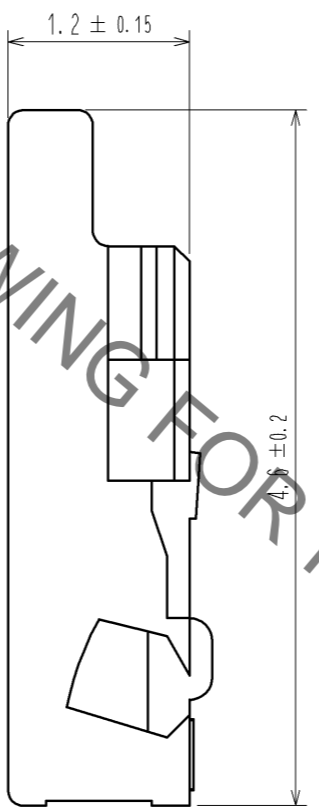

1 FIGURE OF INSERTION

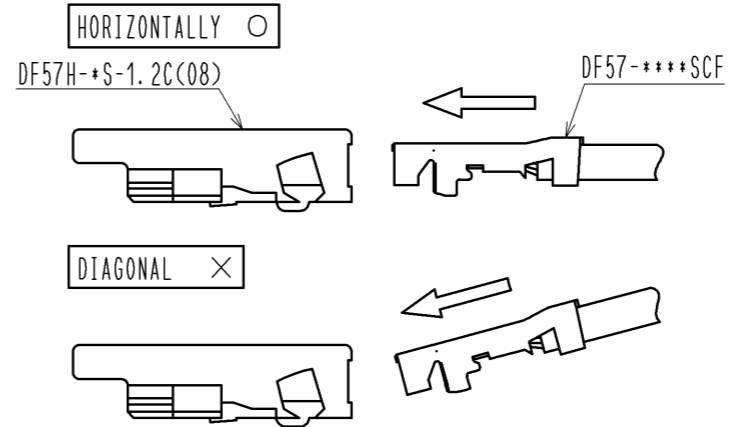

NOTE 1 AVOID ANGLED INSERTION OF CRIMP CONTACT(DF57-****SCF) TO MAINTAIN PERFORMANCE RELIABILITY.


| CODE No. | PART No. | NUMBER OF CONTACTS | A | B | C | D | D |
|-------------------|-------------------|--------------------|-----|-----|------|-----|------|
| CL666-0100-6-08 | DF57H-2S-1.2C(O8) | 2 | 1.2 | 3.5 | 2.98 | 2.6 | 3.15 |
| CL666-0012-0-08 | DF57H-3S-1.2C(O8) | 3 | 2.4 | 4.7 | 4.18 | 3.8 | 4.35 |
| △ CL666-0101-9-08 | DF57H-4S-1.2C(O8) | 4 | 3.6 | 5.9 | 5.38 | 5.0 | 5.55 |
| △ CL666-0102-1-08 | DF57H-5S-1.2C(O8) | 5 | 4.8 | 7.1 | 6.58 | 6.2 | 6.75 |
| △ CL666-0103-4-08 | DF57H-6S-1.2C(O8) | 6 | 6.0 | 8.3 | 7.78 | 7.4 | 7.95 |

| | | | | | |
|-------------------------------|----|---------------|---------------------------|----------------------|-------------------------|
| 部番 | 材質 | 処理、備考 | 1 | LCP | UL94V-0, NATURAL(BEIGE) |
| UNITS mm | | SCALE 20:1 | △の数 2 | 訂正記事 DIS-H-008103 | 設計 TS. KUMAZAWA |
| 承認: KI. AKIYAMA 12.11.21 | | | 検図: HK. UMEHARA 12.11.21 | | |
| 設計: TS. KUMAZAWA 12.11.21 | | | 製図: TS. KUMAZAWA 12.11.21 | | |
| HRS HIROSE ELECTRIC CO., LTD. | | | 図番: EDC3-349275-01 | | |
| | | | 製品名: DF57H-*S-1.2C(O8) | | |
| | | | 製品コード: CL666- | | |


DF57 Series Mating / Unmating Operation Instruction

Mating


① By positioning the convexity of the socket sides to the header concavity, align the centers of the socket and the header in pitch direction.

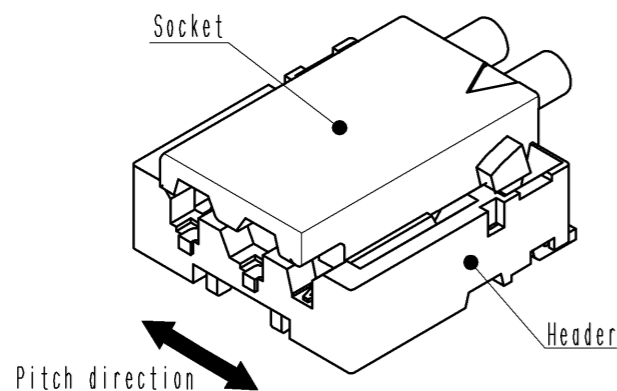

② Slightly press the socket down at cable side to tilted angle.

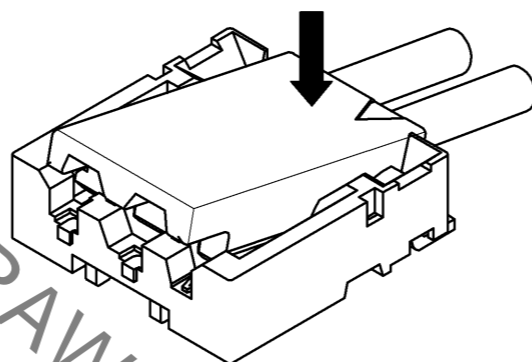


③ Press down at the lever side with stabilizing the cable side to insert. Mating completes.

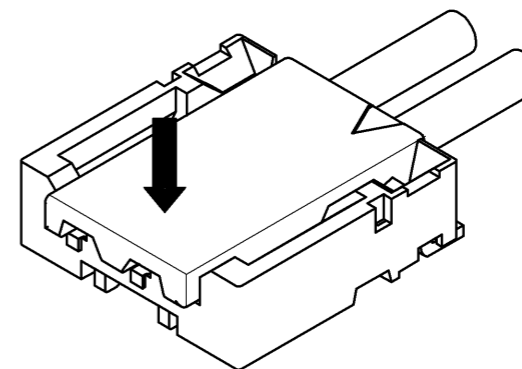


Unmating


① Hook the lever with finger nail.

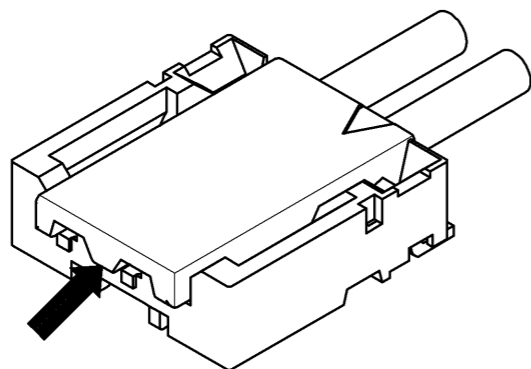

② Lift up to the upper direction and friction lock is released.

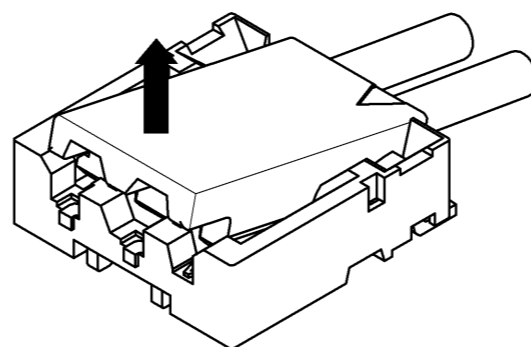

③ Lift up to the upper direction and positive lock is released. Removal completes.

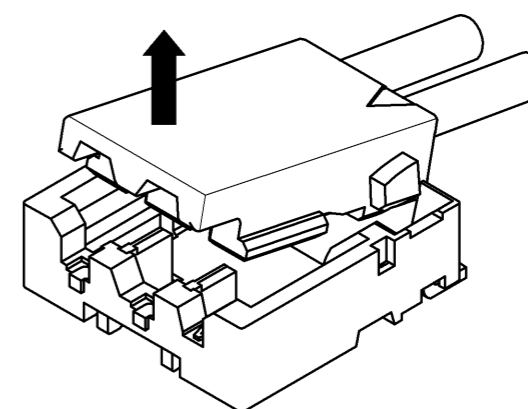

HRS DRAWING FOR REFERENCE

| | | |
|------------|-------------|-------------------|
| HRS | DRAWING NO. | EDC3-349275-01 |
| | PART NO. | DF57H-*S-1.2C<08> |
| | CODE NO. | CL666- |
| | | 2/2 |

May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved. In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.