




TOP VIEW




SIDE VIEW (1)





SIDE VIEW (2)

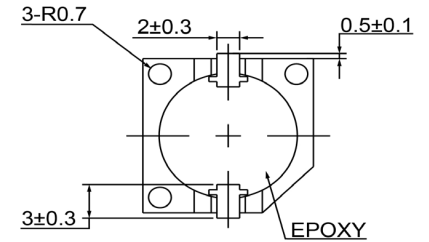

BOTTOM VIEW



Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description		Date	Approved			
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S			
Resonant Frequency	2,300	(Hz)									
Rated Voltage	5	(V)									
SPL @ 10cm	85	(dBA)									
Tone	Single										
Mount Type	Surface Mount										
Voltage Range	3 ~ 7	(V)									
Max Rated Current	30	(mA)									
Housing Material	PPS										
Operating Temperature	-30 ~ +70	°C									
Storage Temperature	-40 ~ +85	°C									
Weight	2	(g)									
 <b>DB UNLIMITED</b>			 <b>DB UNLIMITED</b>			<b>Electro-Mechanical Indicator</b>			<b>IE122305-6</b>		
						Drawn by: A.B.    Date: 10/21/2013    Checked by: C.E.    Date: 10/21/2013    Approved by: J.S.    Date: 10/21/2013					

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).