

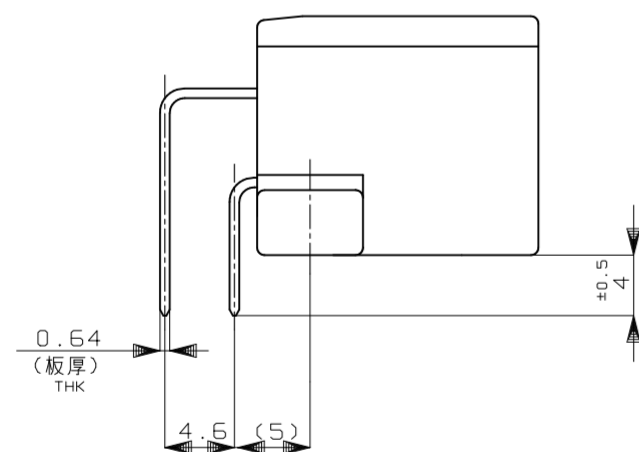
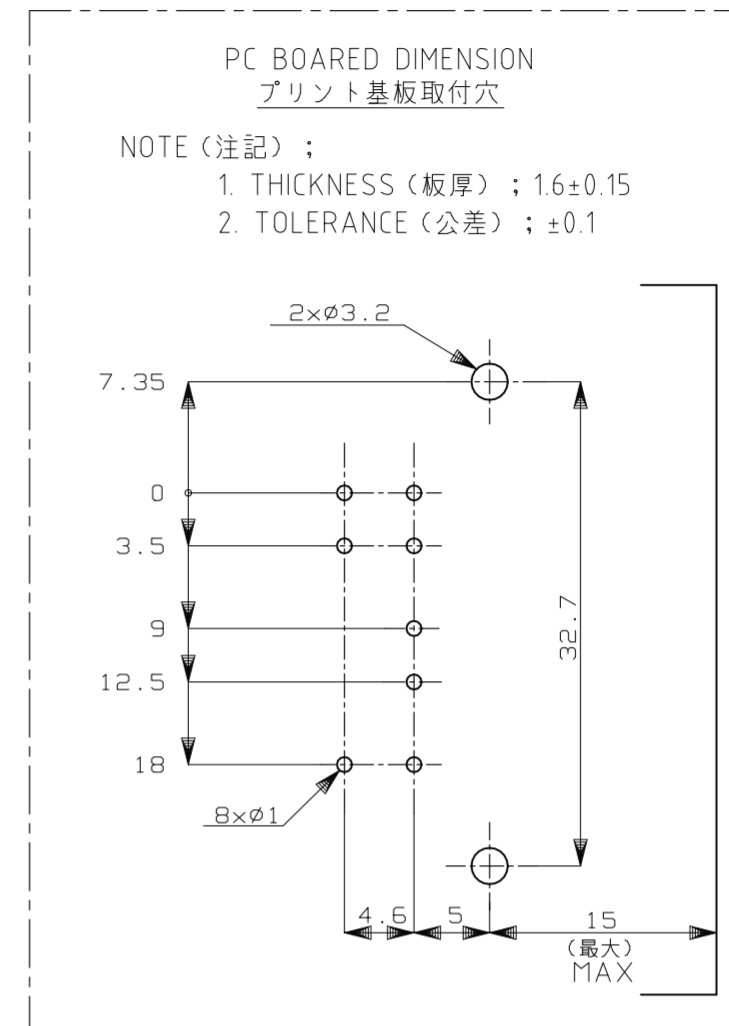
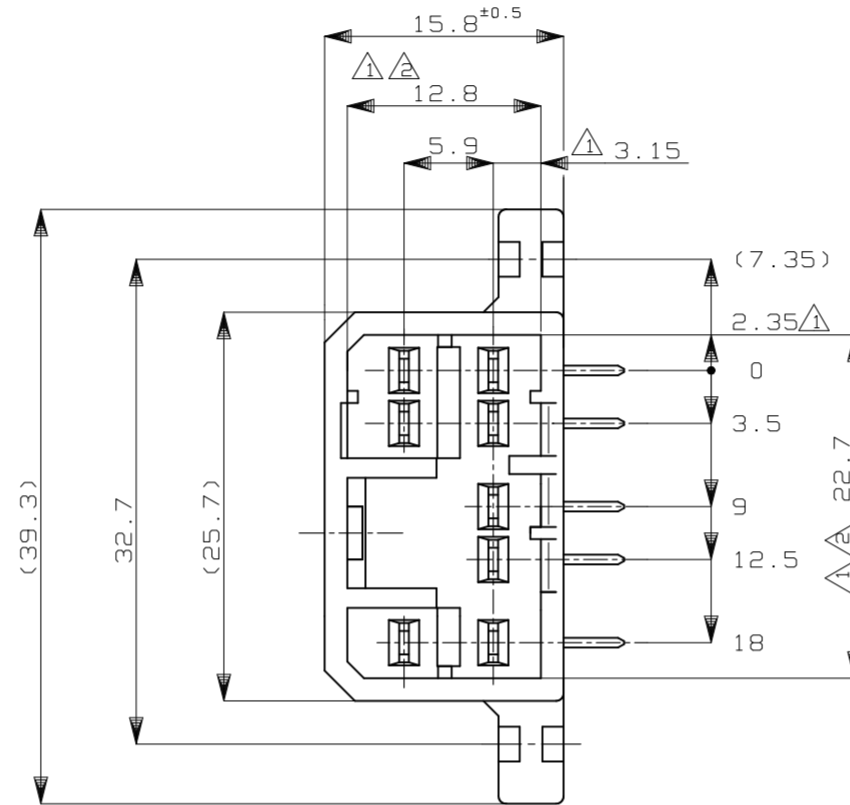


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	J8	REVISED PER ECR-22-153250	21OCT2022	RK	MT

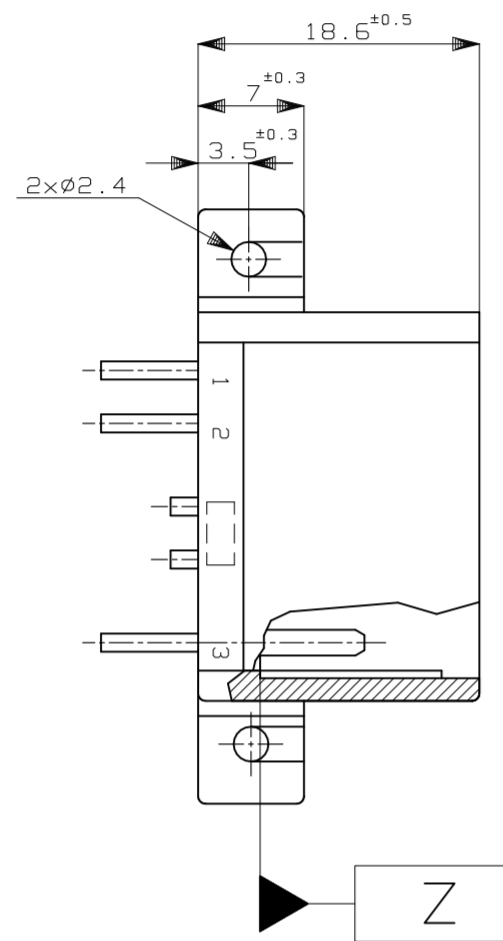

- △ Z 面より2mmの範囲で測定。
- △ 相手ハウジングと所定の機能を満足して嵌合できること
- 3. プリント基板への取付は、JIS B1115又は1122、M3×6ナベ (2種又は4種) のタッピンネジで締付けた後ハンダ付する (締付けトルク: 0.4N-m 以下)
- △ 回路番号; 右図参照のこと。



- △ TO BE MEASURED BETWEEN Z AND 2
- △ TO BE MATE WITH PLUG HSG SMOOTHLY
- 3. TO BE USE M3 TAPPING SCREW JIS B1115 OR 1122 (TYPE 2 OR 4) BEFORE SOLDER (TIGHTENING TORQUE: 0.4N-m MAX)
- △ CIRCUIT NUMBER

	HB	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 8	1~8 (全極)	-	NATURAL 自然色	1-173856-1	
	HB		PRE-TIN × 2	-	4, 8 (2極)	NATURAL 自然色	5-173856-1	
	V-0		PRE-TIN × 8	-	1~8 (全極)	NATURAL 自然色	4-173856-1	
OBSOLETE	HB		PRE-TIN × 6	-	1~4, 6, 8 (6極)	GRAY 灰色	2-173856-6	
				SEE 3-173856-1			3-173856-1	
OBSOLETE	V-2		PRE-TIN × 8	1~8 (全極)		NATURAL 自然色	9-173856-1	
OBSOLETE			PRE-TIN × 5	4~8 (5極)		NATURAL 自然色	2-173856-1	
	HB		PRE-TIN × 8	-	1~8 (全極)	GRAY 灰色	173856-6	
OBSOLETE		TIN-LEAD	SELECTIVE GOLD × 8	1~8 (全極)		NATURAL 自然色	1-173856-1	
OBSOLETE			PRE-TIN × 8		1~8 (全極)	BLUE 青色	173856-5	
OBSOLETE			PRE-TIN × 8		1~8 (全極)	GREEN 緑色	173856-4	
			PRE-TIN × 8	-	1~8 (全極)	NATURAL 自然色	173856-1	
	USED MATERIAL FLAMMABILITY	SOLDERING SIDE 半田付け面	CONTACT SIDE 接触部側		△ GOLD PLATED CIRCUIT NO. 金めっき回路番号	△ PRE-TIN CIRCUIT NO. 銀めっき回路番号	COLOR 色	PART NUMBER 製品型番

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	19SEP03	T.SHINOHARA
CHK	19SEP03	K.BETSUI
APVD	19SEP03	K.BETSUI
PRODUCT SPEC	108-5216	
APPLICATION SPEC	取付適用規格	

TE Connectivity

070 SERIES MULTI-LOCK CONNECTOR
8POSITION CAP HOUSING ASSEMBLY

SIZE	A2	CAGE CODE	00779	DRAWING NO	173856	RESTRICTED TO	-
WEIGHT	5.55g	SCALE	2:1	SHEET	1 of 1	REV	J8

CUSTOMER DRAWING

TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差

0 <= X <= 10	: ±0.2
10 <= X <= 30	: ±0.25
30 <= X <= 100	: ±0.3
ANGLE	: ±3°