
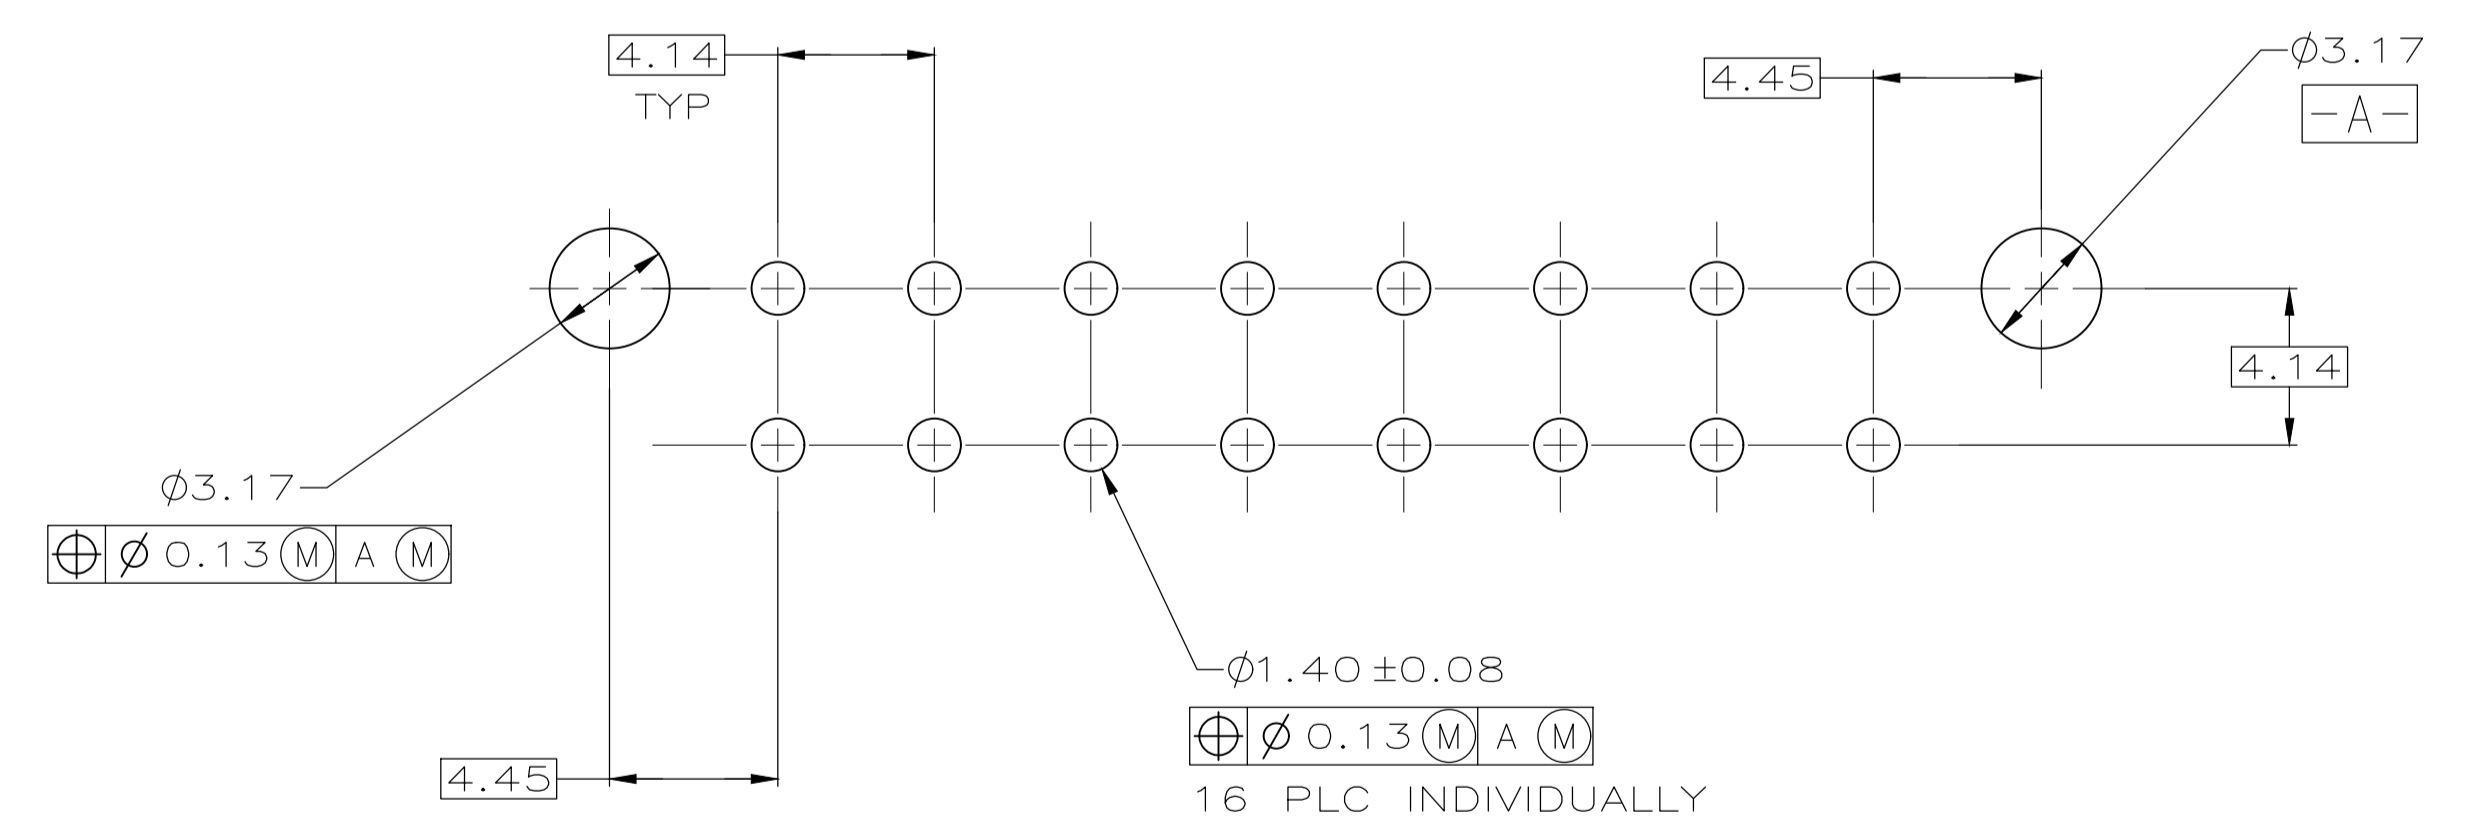
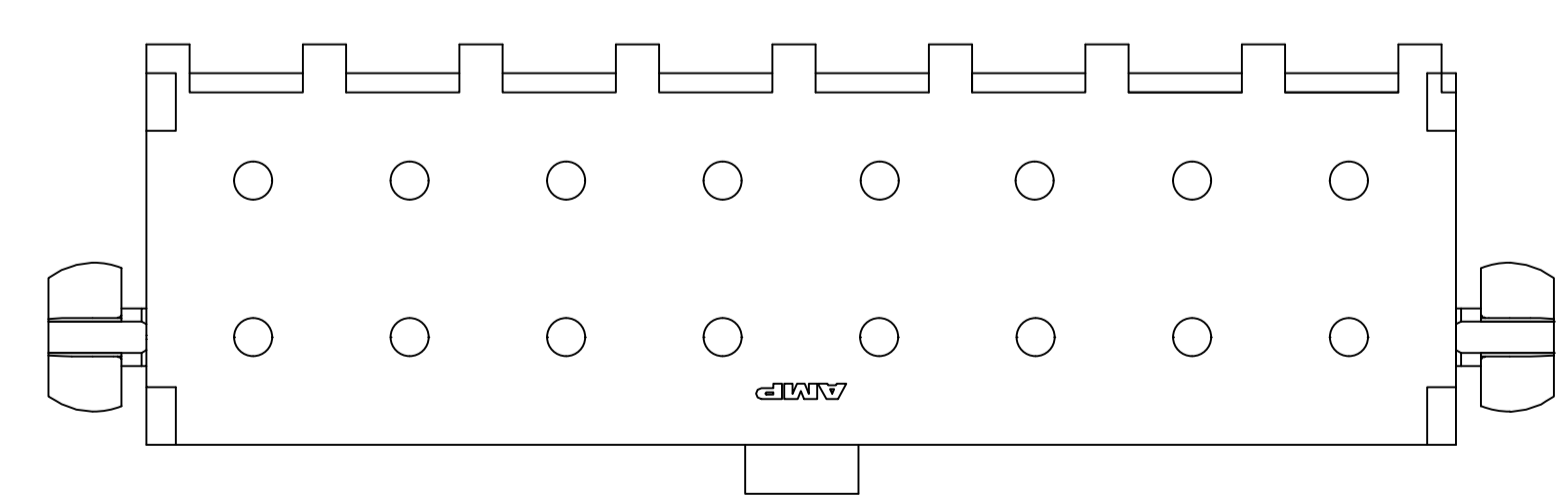


- PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.
- 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

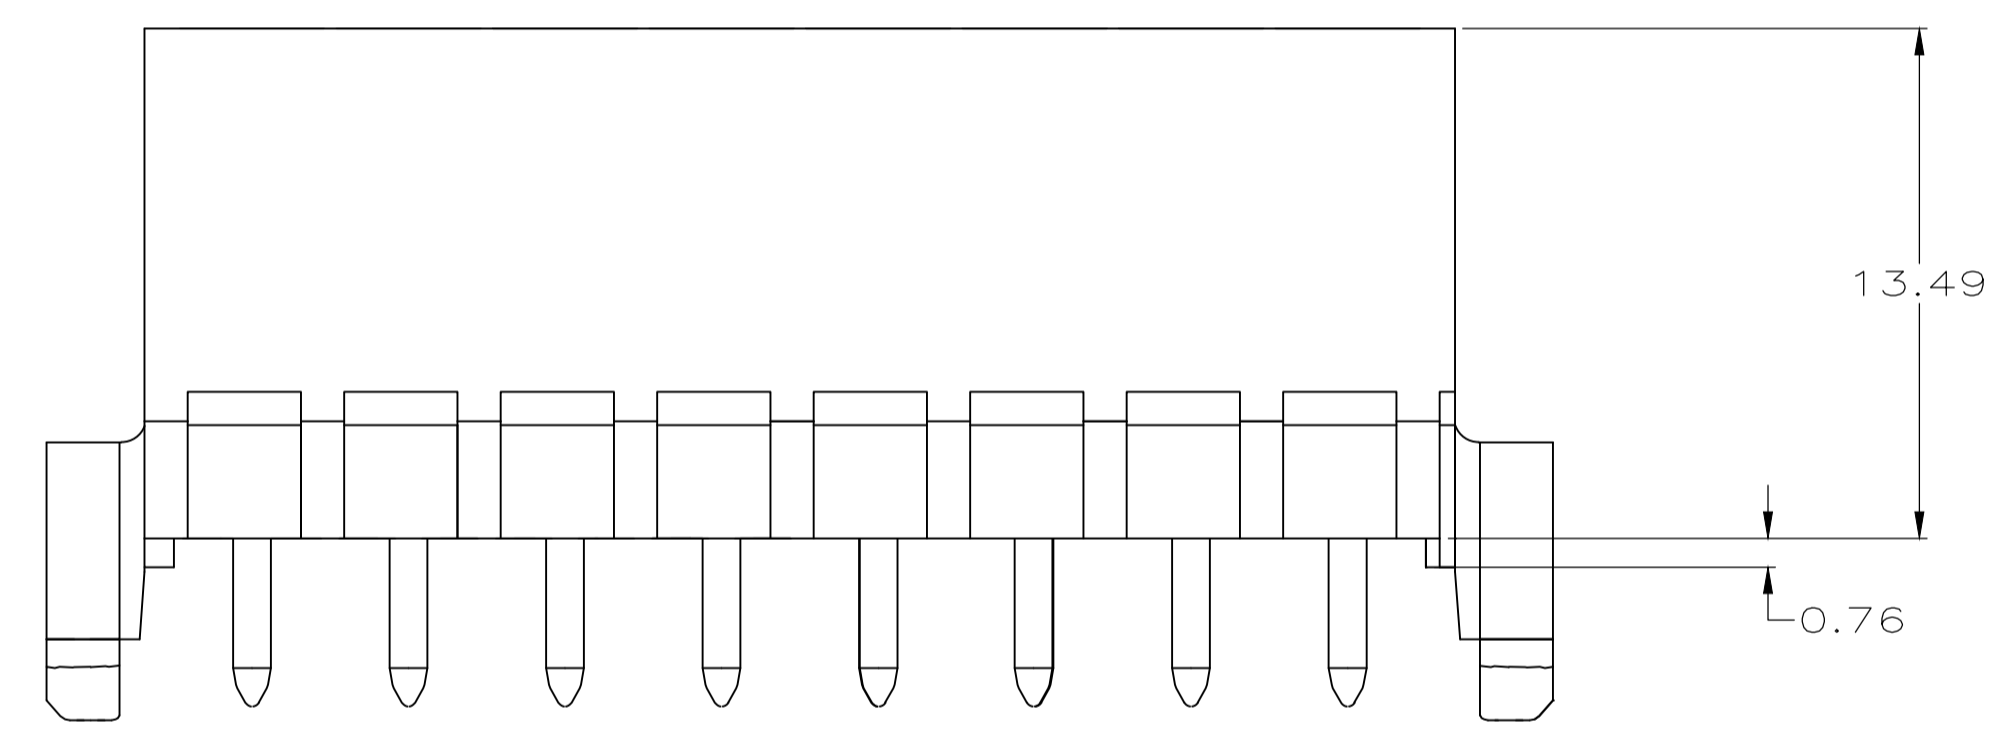

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 THICK P.C. BOARD

	BRASS, GOLD	5	NYLON, UL94V-0	WHITE	1-794075-1
	BRASS, TIN	4	NYLON, UL94V-0	WHITE	1-794075-0
OBSOLETE	BRASS, GOLD	3	NYLON, UL94V-0	WHITE	794075-2
	BRASS, TIN-LEAD	2	NYLON, UL94V-0	WHITE	794075-1
	MATERIAL	FINISH	MATERIAL	COLOR	PART NO.
	PIN		HOUSING		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DMN	S	09JUN05
mm	0.13	CMK	S	29AUG2003
	0.13	R	JONES	29AUG2003
	0.13	APVD	R	JONES
	0.13	PRODUCT SPEC		
	0.13	APPLICATION SPEC		
	0.13	WEIGHT		
	0.13	CUSTOMER DRAWING		

NAME: **STE** TE Connectivity  
 HEADER ASSEMBLY, CLOSED BOTTOM, 16 CKT, DOUBLE ROW VERTICAL, MINI UNIVERSAL MATE-N-LOK

SIZE: A1    CAGE CODE: 00779    DRAWING NO: 794075    RESTRICTED TO: -

SCALE: 5:1    SHEET: 1 OF 1    REV: F1