



10 9 8 7 6 5 4 3 2 1

FACE VIEW OF FEMALE NANO-CHANGE INSERT

FACE VIEW OF MALE MICRO-CHANGE INSERT

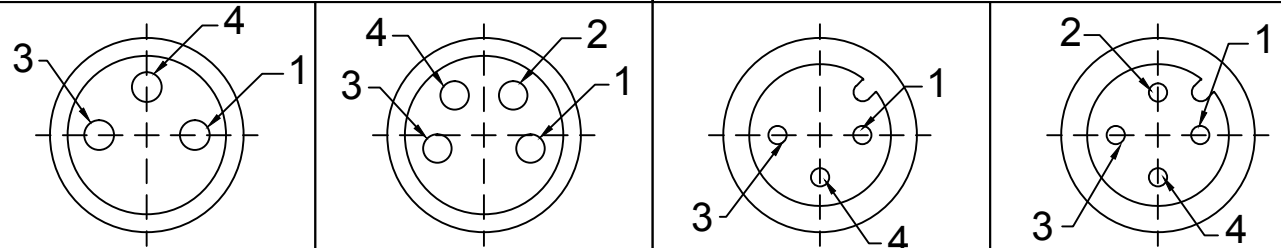

SAP P/N #	ENGINEERING P/N	POLE
1200330001	484030	4
1200330002	483030	3

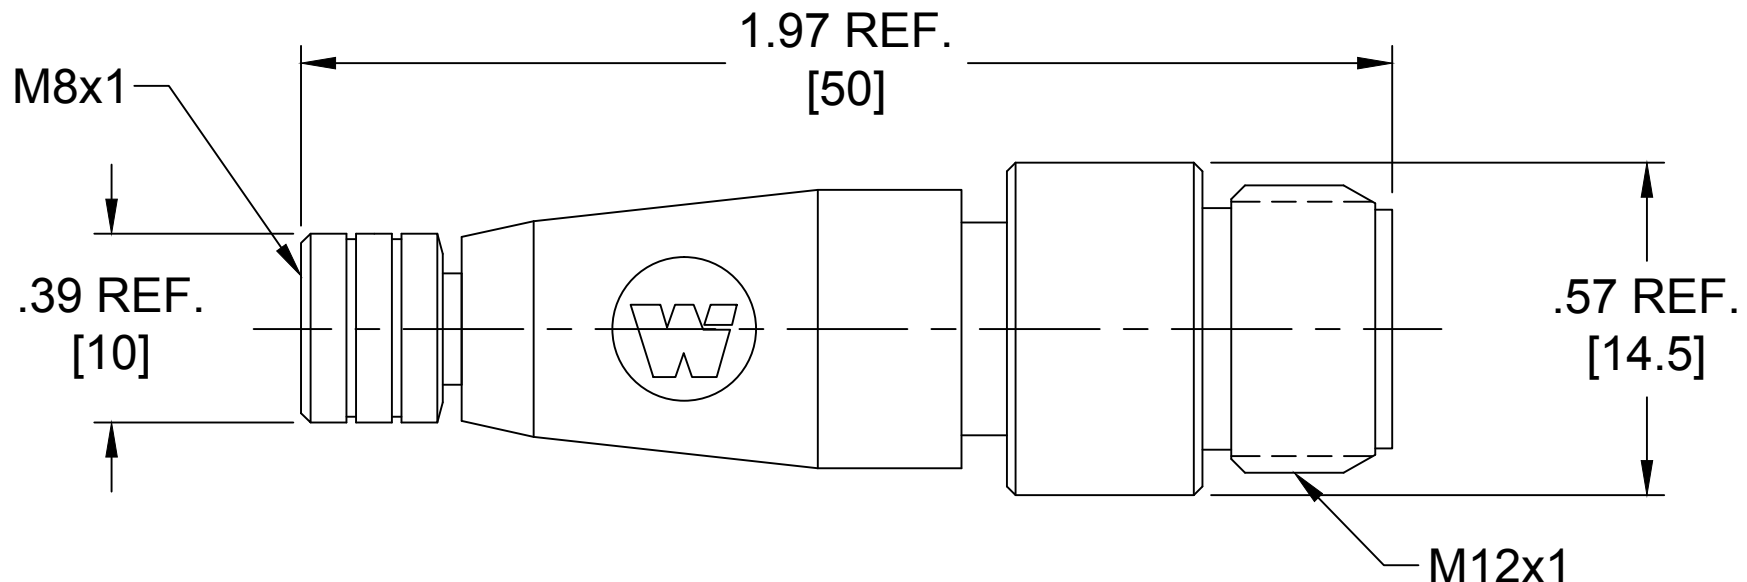

SPECIFICATIONS

MATERIALS:

COUPLING NUTS: BRASS, NICKEL PLATED
 CONTACTS: COPPER ALLOY, GOLD PLATED
 INSERT: BLACK, PUR
 O-RING: RED, FKM
 OVERMOLD: BLACK, TPU
 WIRES: #22AWG-PVC-UL STYLE 1569


ELECTRICAL:

CURRENT RATING: 4A
 VOLTAGE: 60VAC/75VDC

MECHANICAL:

OPERATING TEMPERATURE: 0°C TO 50°C
 PROTECTION: IP67 (IN FULLY MATED POSITION)

PART No MATRIX

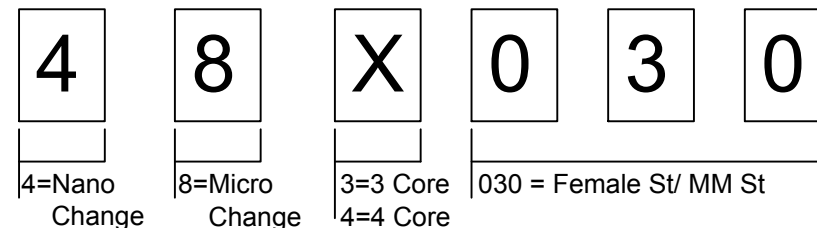

INITIAL RELEASE EC NO: IPG2015-0007 DRWN: BARDEN 2014/07/22 CHKD: TWOLDEGE 2014/07/22 APPR: JFMURPHY 2014/08/02	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
		$\nabla=0$ $\sphericalangle=0$	mm	INCH	IN/MM	NTS	INCH	DRAWN BY DATE BARDEN 2014/07/22 CHECKED BY DATE TWOLDEGE 2014/07/22 APPROVED BY DATE JFMURPHY 2014/08/02 MATERIAL NO. SEE TABLE DOCUMENT NO. SD-120033-001 SHEET NO. 1 OF 1				
		4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±0.13 ±.010 1 PLACE ±0.25 ±.020 ANGULAR ±1/2°	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		TITLE NANO TO MICRO CHANGE MALE TO FEMALE STRAIGHT ADAPTOR MOLEX INCORPORATED					
		A	SIZE B									

10 9 8 7 6 5 4 3 2 1