


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	25 Ω	80 Ω	206 Ω
Minimum	- Ω	64 Ω	- Ω

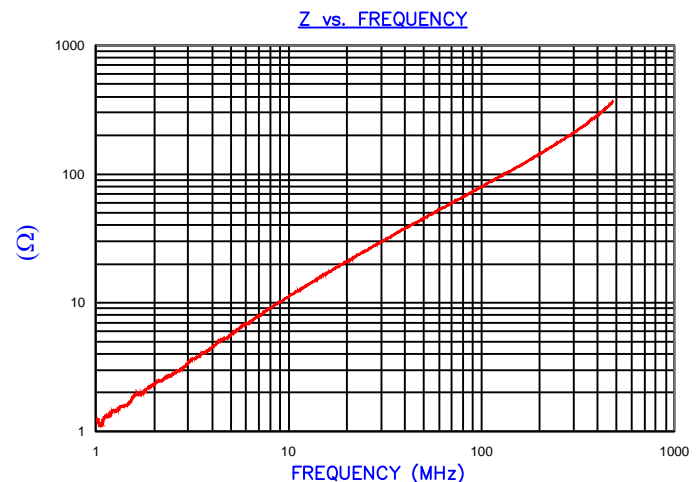

FERRITE CORE DIMENSIONS (SPEC):

A	15.60 [.614]	+	0.30 [.012]
B	13.60 [.535]	+	0.26 [.010]
C	6.00 [.236]	+	0.30 [.012]
D	2.80 [.110]	+	0.20 [.008]
E	0.70 [.028]	+	0.15 [.006]

WEIGHT/1000 0.96 kgs [2.12 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

SCALE DRAWING 1:1

28R0614-400



DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
PROJECT/PART NUMBER:				REV	PART TYPE:	DRAWN BY:	
28R0614-400				B	FERRITE CNZ CORE	Jcai	
B	UPDATE LOGO	08/29/16	QIU	DATE:	10/31/12	SCALE:	6:1
A	ORIGINAL DRAFT	10/31/12	Jcai	CAD #	28R0614-400-B	TOOL #	R0614
REV	DESCRIPTION	DATE	INT			MATERIAL: Ferrite	