




micro SD™



Push / Push




Ultra Low Profile

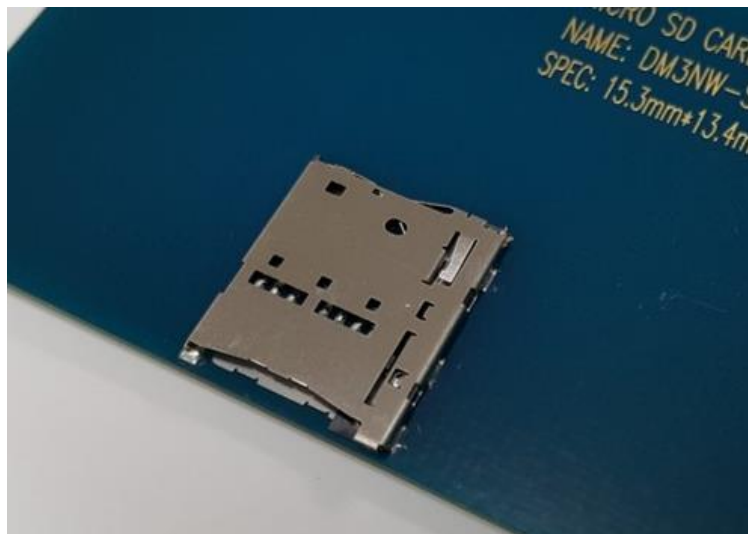


Features

- 1 Ultra Low profile 1.15mm height
- 2 Prevents incorrect card insertion
- 3 Excellent card lock mechanism
- 4 Prevents mis card insertion
- 5 Card detection switch (Normally close)




* As push-push type micro SD™ connector as of June 2016

Dimensions

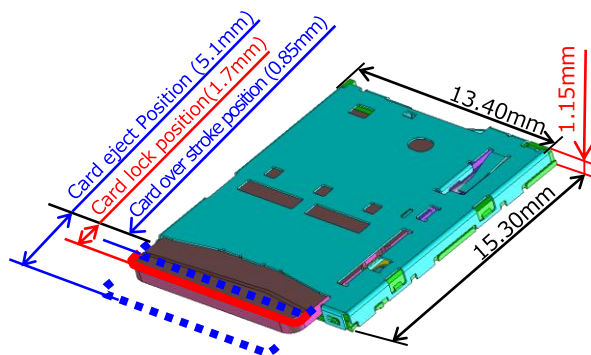

Prevents card jamming if nano SIM inserted

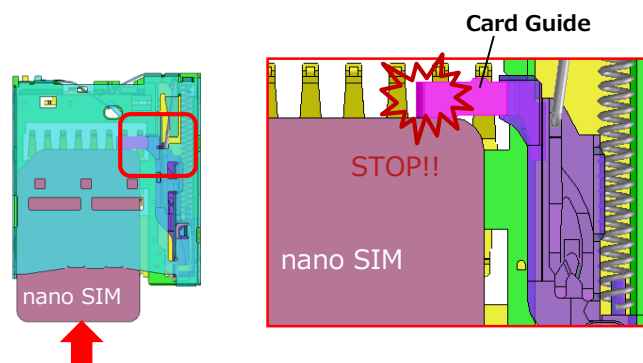

Easy to remove the card when accidentally inserted

Specifications

| | |
|-----------------------|---|
| Contact Resistance | 60mΩ Max. (Signal) 200mΩ Max.(Detection) |
| Withstanding Voltage | 500V AC for 1 minute |
| Mold Resistance | 1,000MΩ Min. (500V DC) |
| Rated Current | 0.5A |
| Rated Voltage | 10V AC |
| Operating Temperature | -30℃ to +85℃ |
| Mating cycles | 10,000 times |

• RoHS compliant, Halogen-free product*

*This product satisfies halogen free requirements defined as 900ppm maximum chlorine, 900ppm maximum bromine, and 1500ppm maximum total of chlorine and bromine

※ Please contact Hirose's sales representative prior to adopting the products to in-vehicle devices.