

1

2

3


4

5


6

7

A

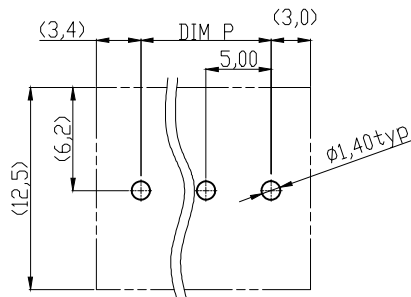

RECOMMENDER PCB LAYOUT



Material

- ① Insulating body: Thermoplastic (UL94V-0),GREY
- ② Insulating cover: Thermoplastic (UL94V-0),GREY
- ③ Insulating lever: Thermoplastic (UL94V-0),GREY
- ④ Contact pin: Brass, Tin plated
- ⑤ Spring clamp: Stainless steel

Electrical cULus

Voltage rating: 300V  
 Current rating: 6A  
 Wire range:  
 Solid wire(AWG): 16-26  
 Stranded wire(AWG): 16-26  
 Wire strip length: 6-7mm  
 Withstanding Voltage: 1.6KV  
 Operating temperature: -40°C to +115°C  
 Soldering temperature: 250°C±10°C/5 Sec  
 Safety Approval:

A

B

B

C

C

D



D

E

E

F

F

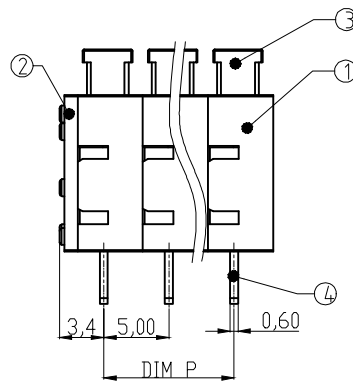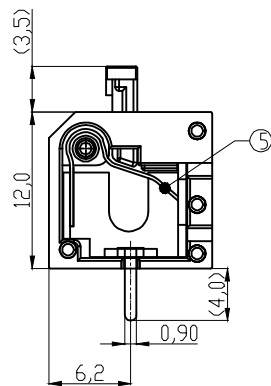

DIMENSION

L	Nx5.0+1.00
P	(N-1)x5.0

N=Number of poles

Poles	Tolerance	
	DIM L	DIM P
2p-4p	±0.15	±0.15
5p-9p	±0.20	±0.20
10p-14p	±0.30	±0.30
15p-19p	±0.40	±0.40
20p-24p	±0.50	±0.50

G

G

**RoHS compliant**  
Unit: mm



File No.: E349947

Scale	1:1	Date	19.04.2010	Name	Alex	Customer-No.	
<b>TOLERANCE</b>		Drawn	19.04.2010	Alex		ASSMANN WSW-No. <b>A-TB500-HXxxV</b>	
X.	±0.50	Approved	19.04.2016	Joanna			
X.X	±0.30					Drawing-No.	
X.XX	±0.10	① Add UL	19.04.2016	Joanna		<b>ASS 4124 CO</b>	rev01
DIM	TOL	② Drawn	19.04.2010	Alex		Replace	Sheet
X.°	±1°	Id.	Modification	Date		Name	
Angle	TOL						

H

H

1

2

3

4

5

6

7