



### Electrical Specifications

**Pass Band:** 400-800 MHz

**Insertion Loss in Pass Band:** 1.0 dB Max

**Rejection:** >80 dB @ DC-250 MHz

**Power Handling:** 10 W Max

### Mechanical

**Connector Type:** N (F)

**Dimensions:** 2.380 x 1.00 x 1.00 Inches

### Environmental


**Operating Temperature:** -20 to +70° C

**Storage Temperature:** -40 to +85° C

**Shock:** 20 G. 11 ms


**Vibration:** 20 G. 5 to 200 MHz

### Outline Drawing:

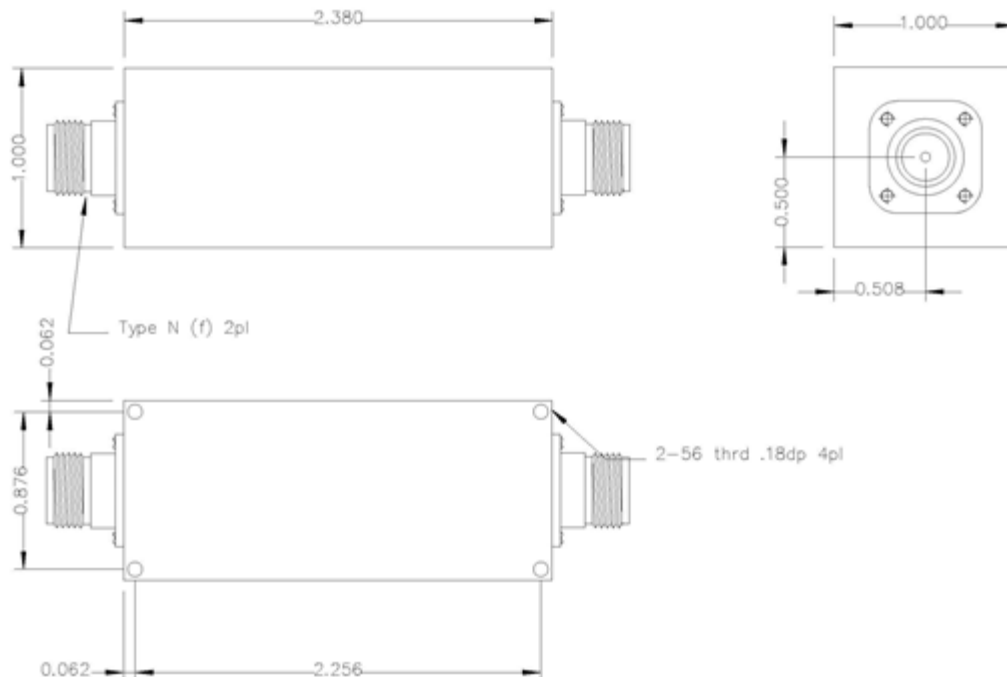



### Outline Drawing:

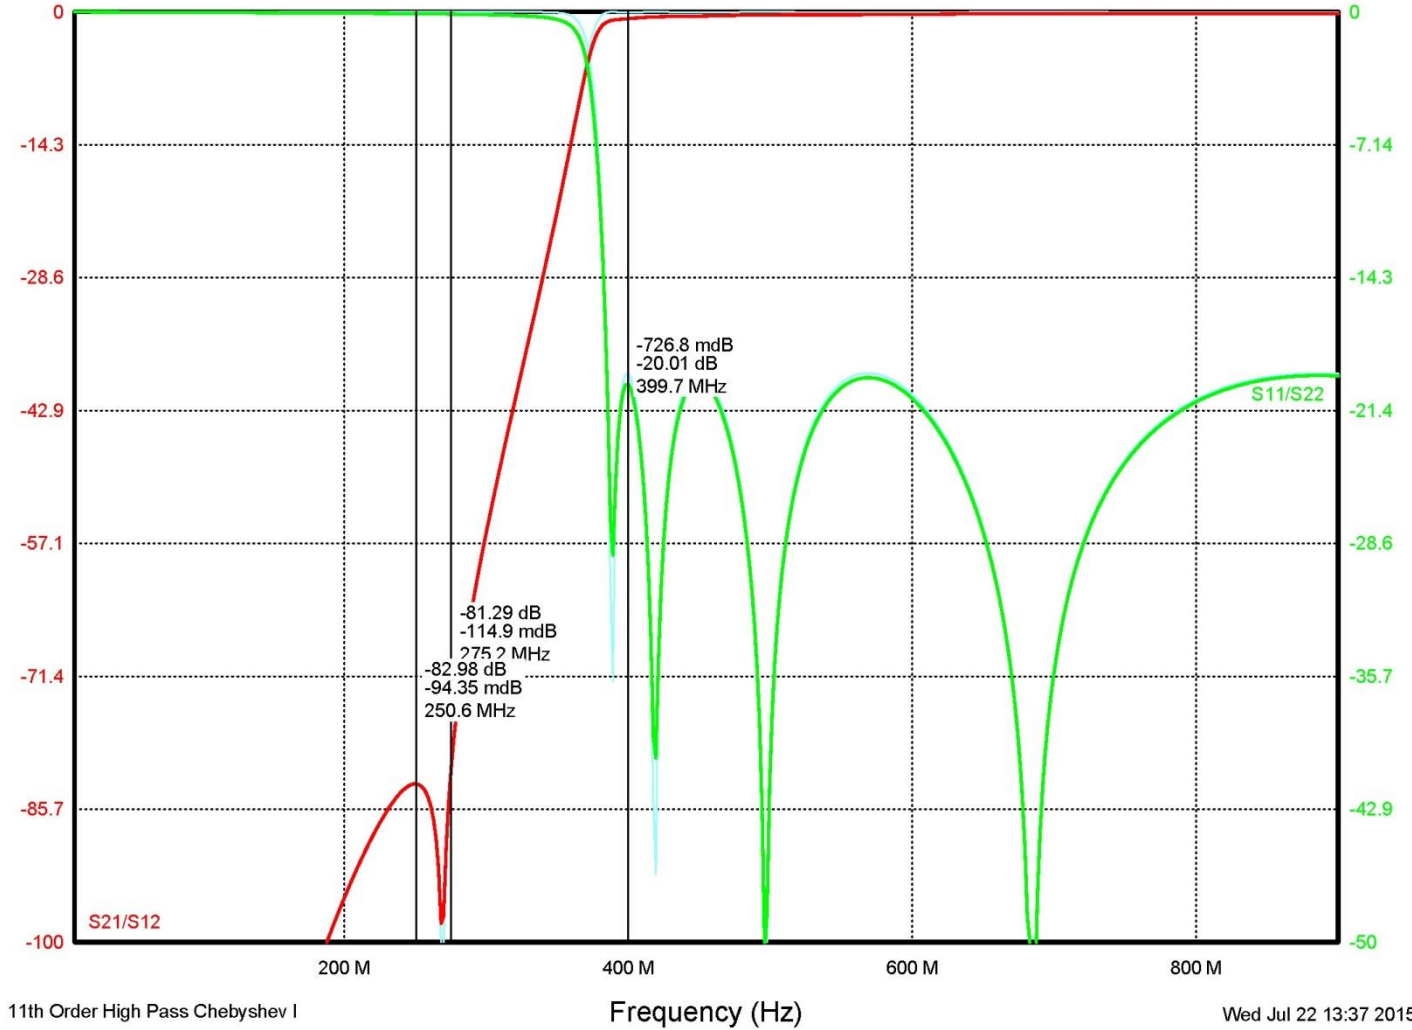

**Note:** This is a simulation plot. Actual results may differ once the product is implemented.