THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	S3	ECR–15–005665	10AUG2015	BDA	PKS



IDENTIFICATION NUMBER FOR MAGNET WIRE RANGE

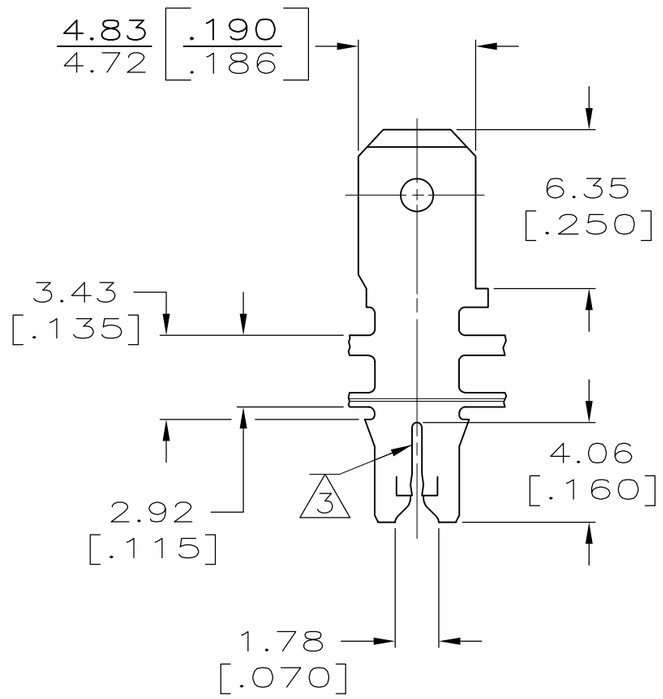

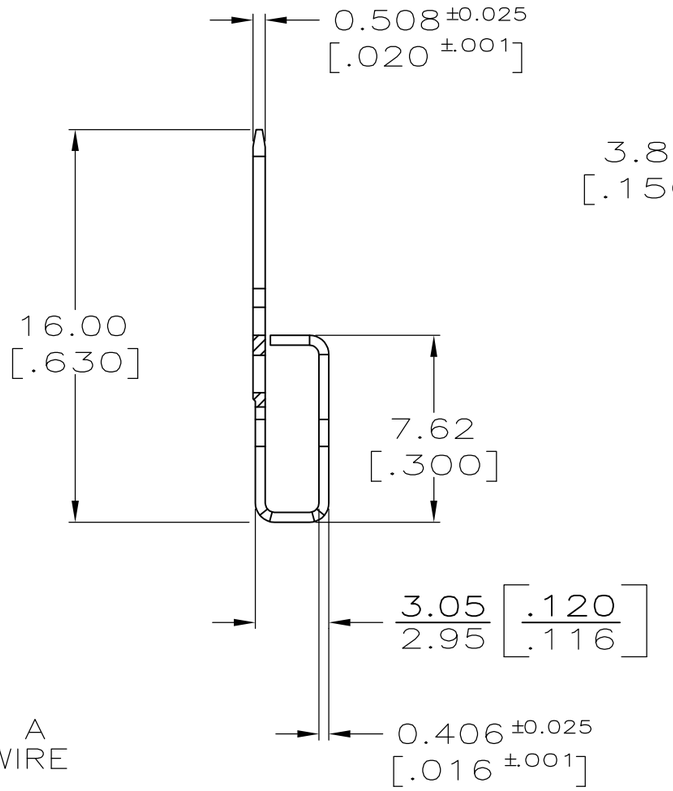

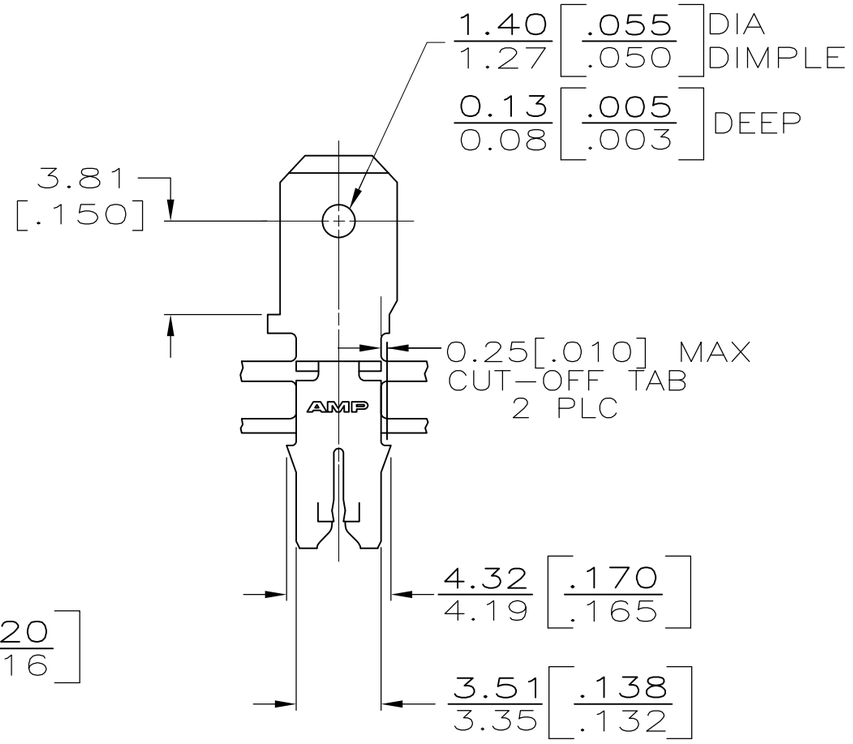

3 SLOT TERMINATES A SINGLE MAGNET WIRE ONLY, COPPER 0.64–0.81mm[#22–#20]AWG
SLOT TERMINATES A SINGLE WIRE ONLY, ALUMINUM 0.72–0.91mm [#21–#19] AWG ALUMINUM WIRE RANGE APPLIES FOR POST–TIN PLATED VERSIONS ONLY.

1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.59[.220] CENTERS

2 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED–IN TO PREVENT PULL–OUT WHEN MATING RECEPTACLE IS DISCONNECTED

METRIC

VARNISH RESIST OVER TIN PL	62511–2
TIN PLATE	62511–1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± 0.25[.010]
4 PLC	± –
ANGLES	± –

MATERIAL: BRASS

FINISH: SEE TABLE

DWN D.K. SCHRUM 12/4/89
CHK M.S. FEHER 12/19/89
APVD –
PRODUCT SPEC 108–2012
APPLICATION SPEC 114–2046
WEIGHT –

TE Connectivity

NAME: TAB, .187 FASTON, MAG–MATE –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–62511	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV S3