

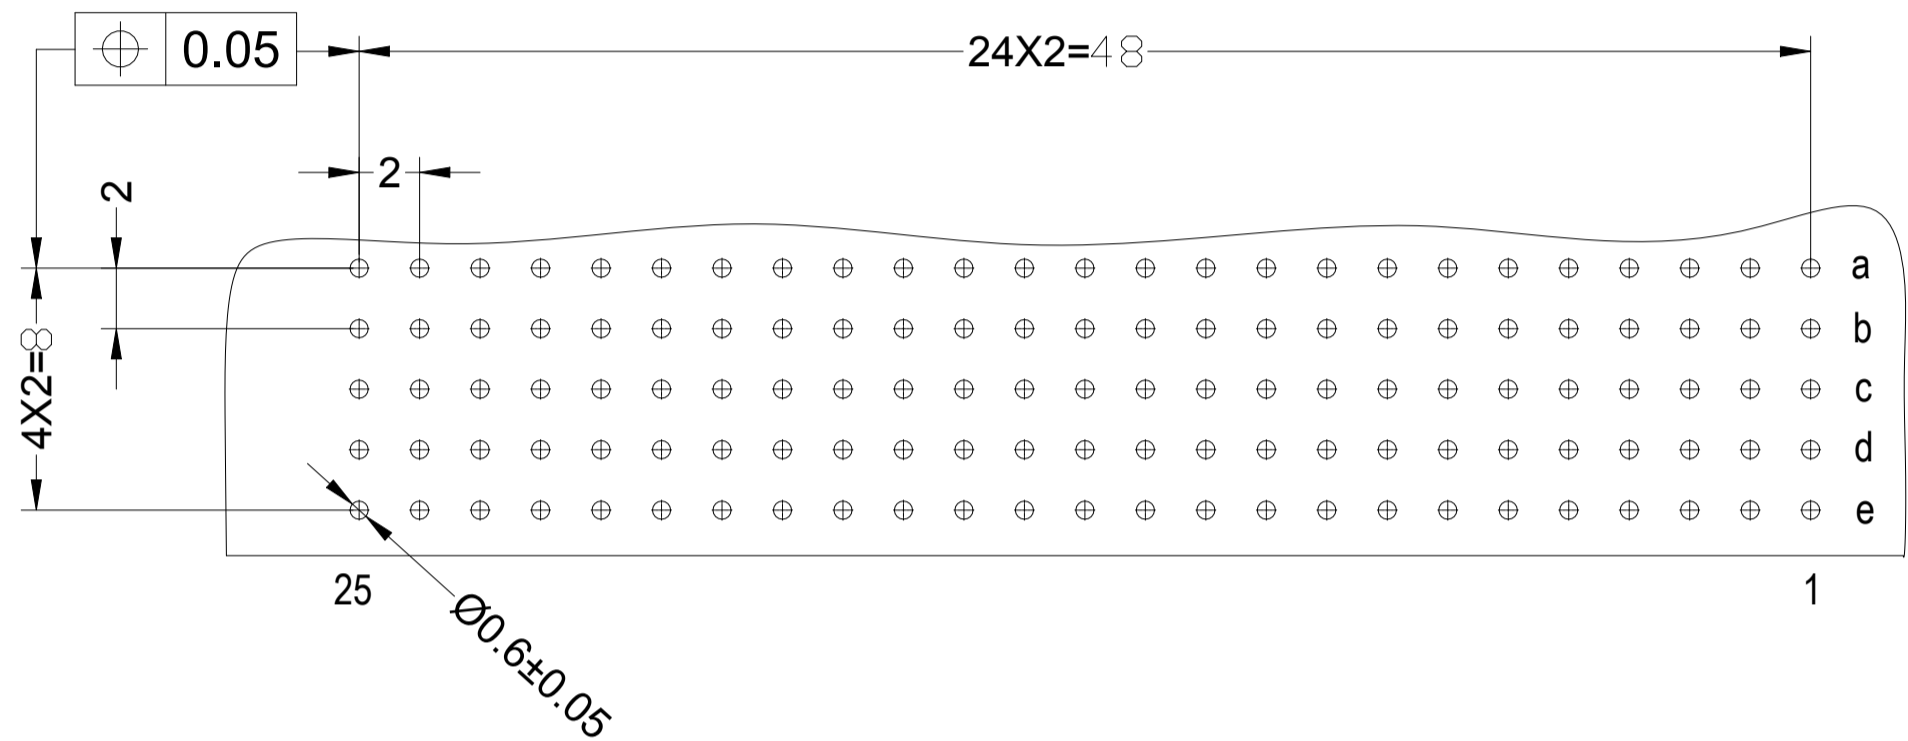
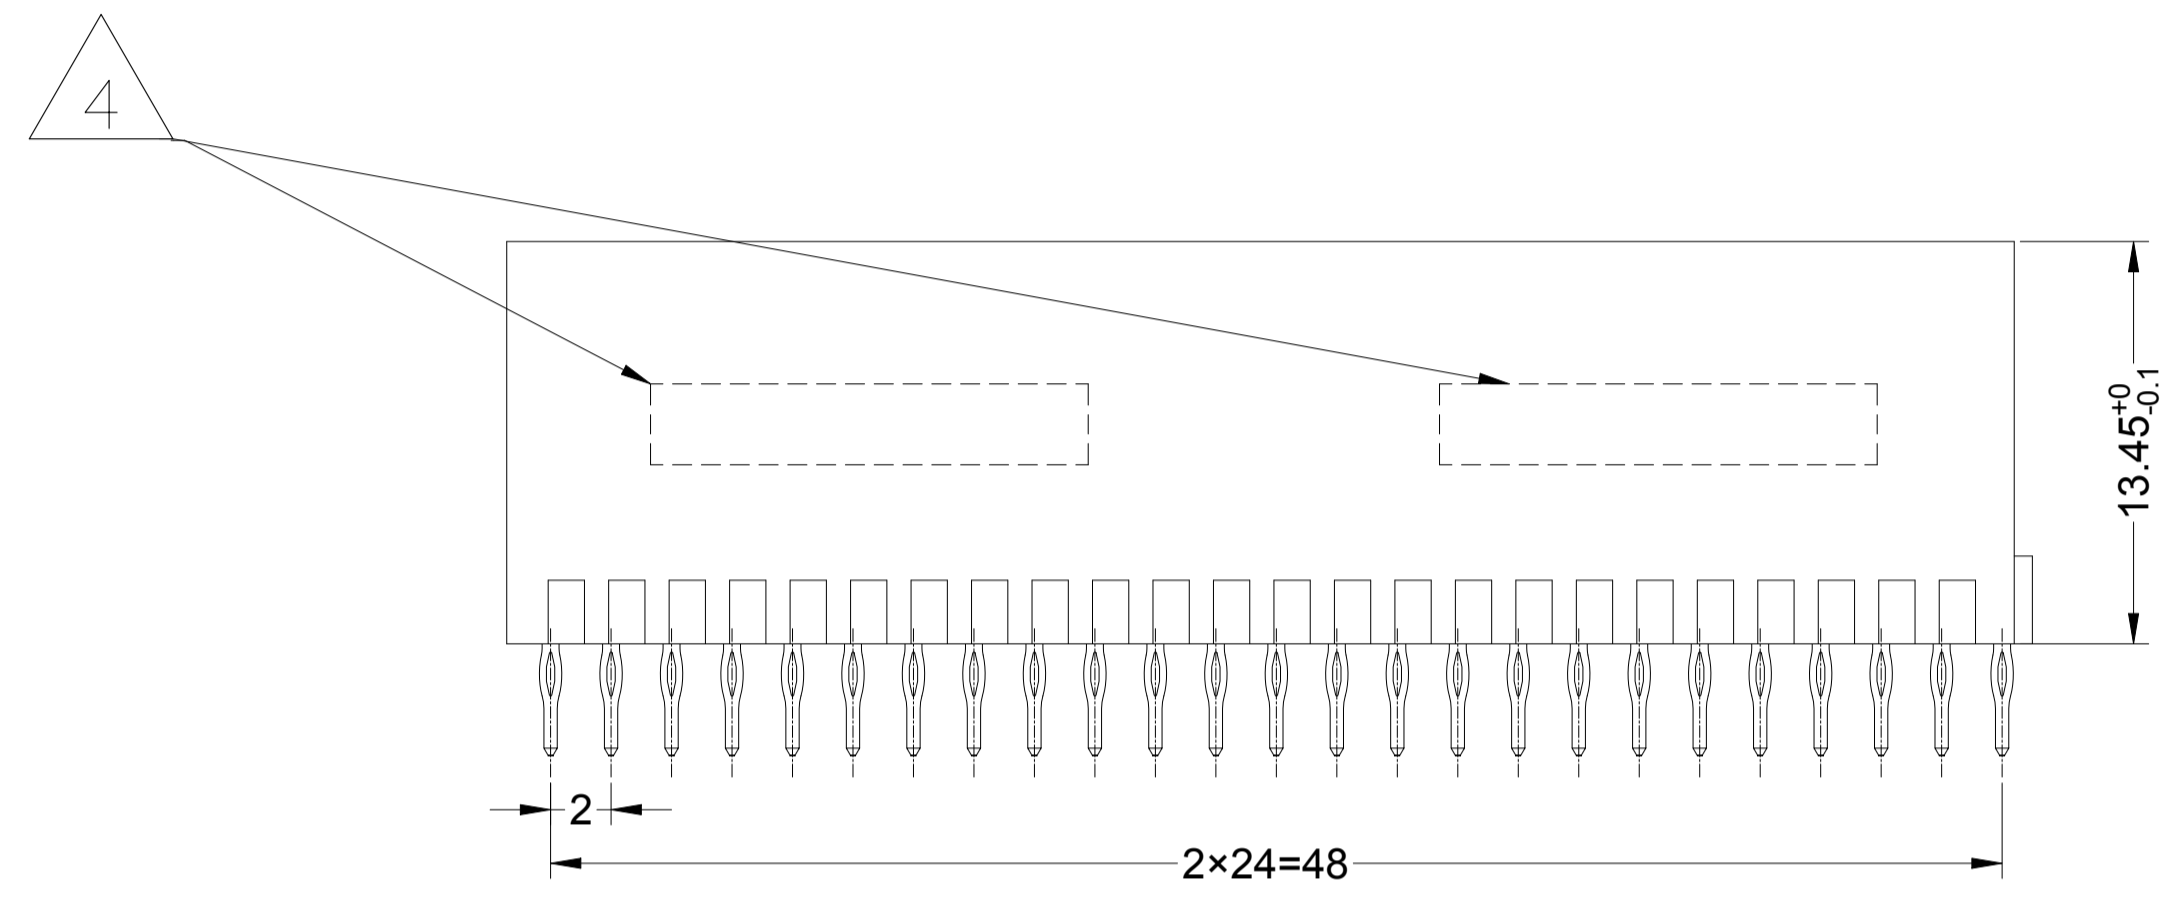
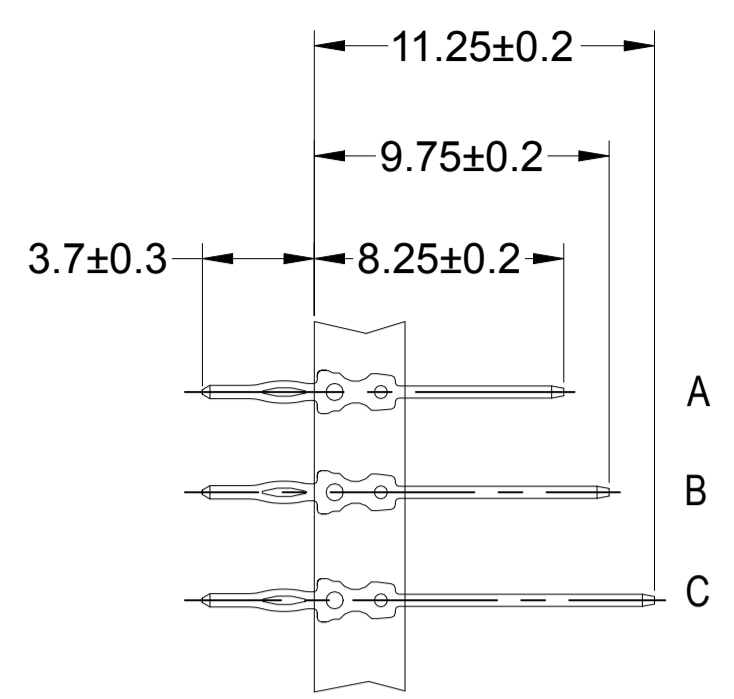
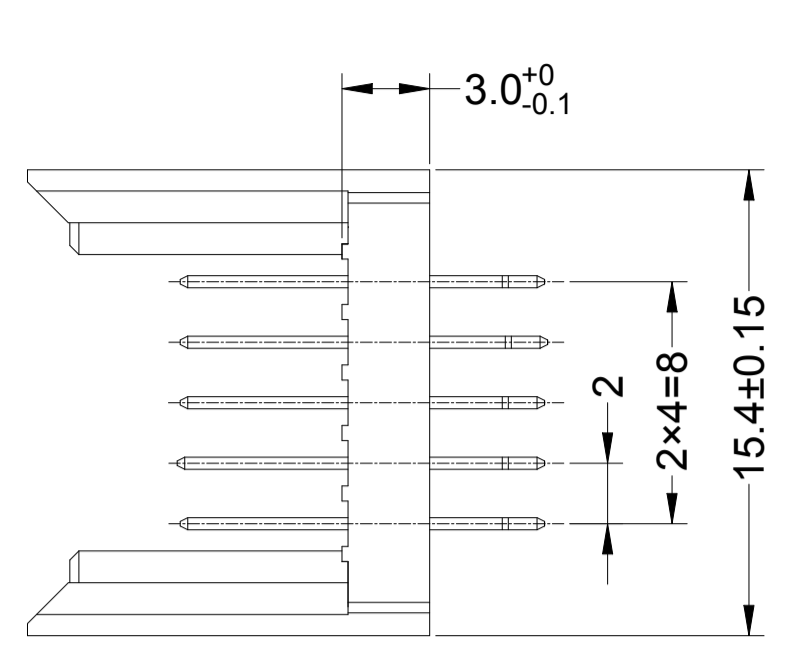


REVISIONS				
REV	DATE	DESCRIPTION	BY	APP'D
A	18OCT2021	INITIAL DRAWING	TL	HL

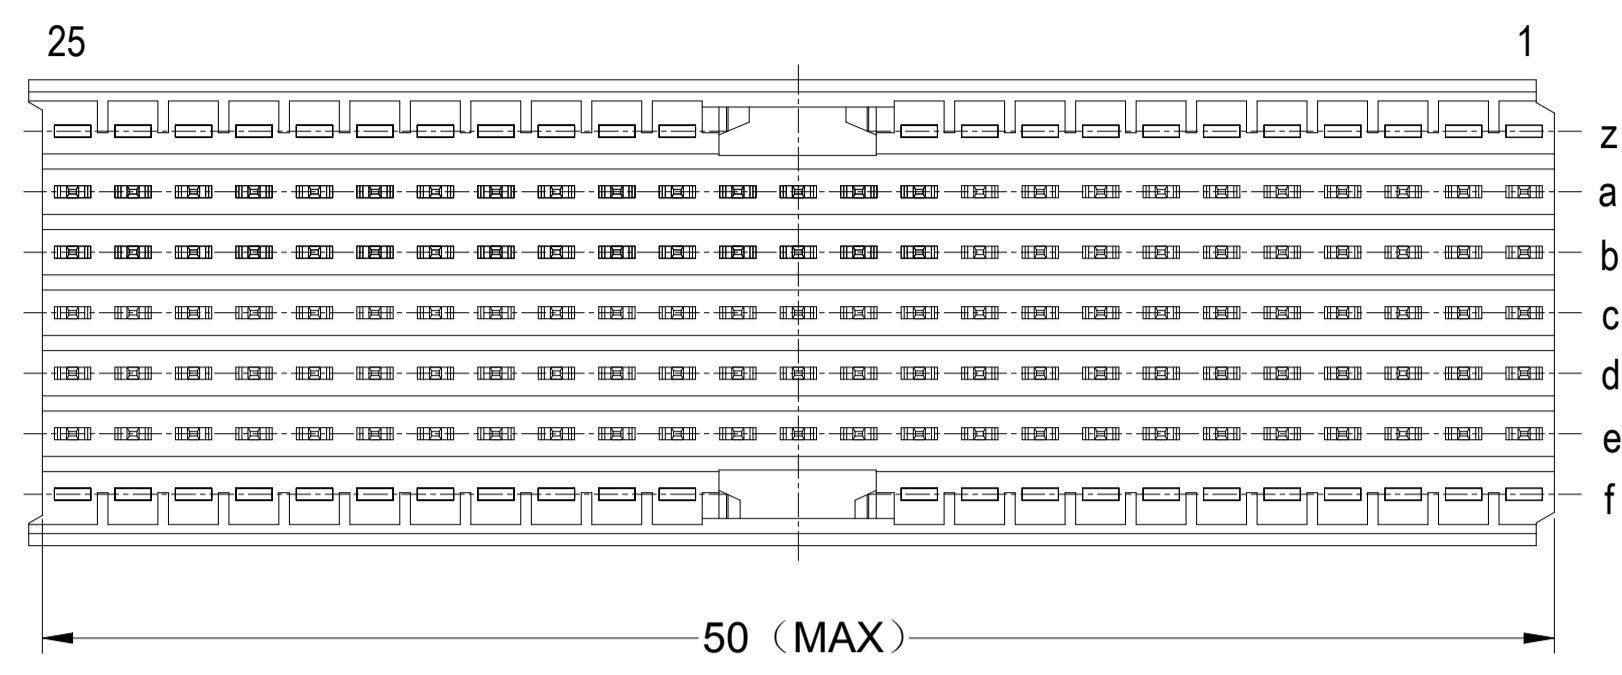

RECOMMEND PCB-HOLE LAYOUT
 COMPONENT SIDE SHOWN
 TOLERANCE ±0.05

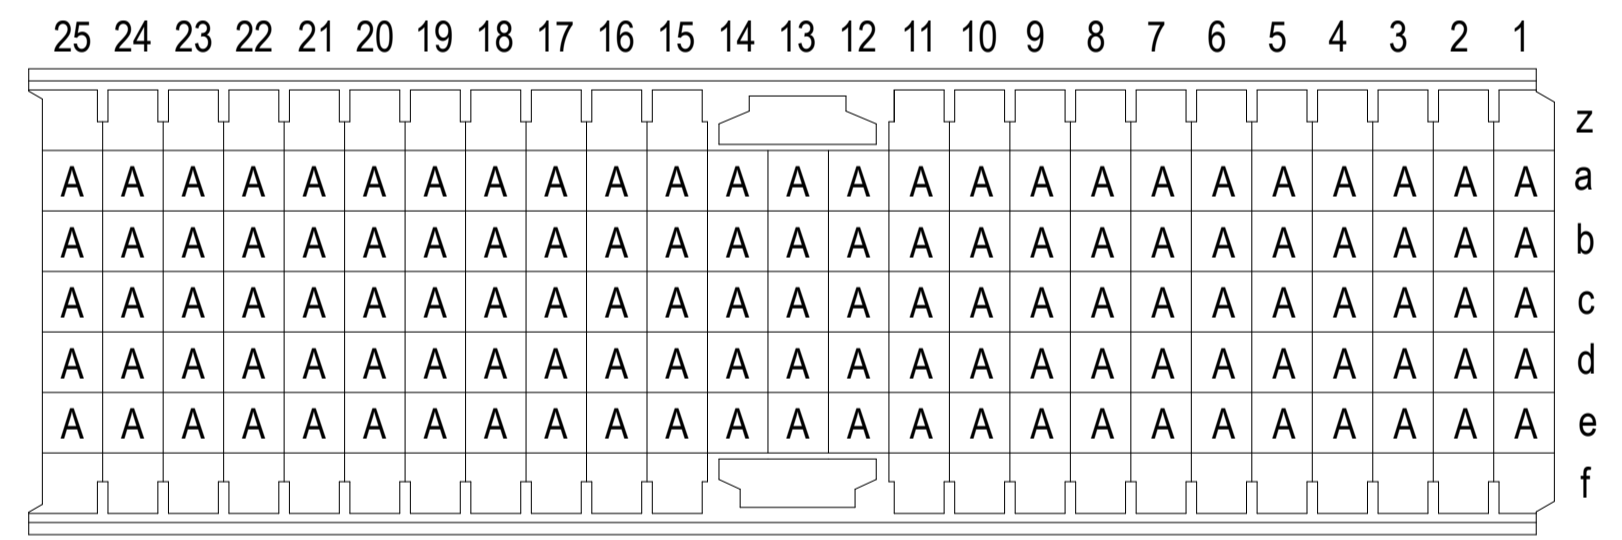

- 1 MATERIAL:
 CONTACT: COPPER ALLOY.
 HOUSING: GLASS-FILLED POLYESTER.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING
 (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
 PIN: 0.5µm MIN TIN.
 FOR PLATING OF MATING SURFACES SEE APPLICABLE
 SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
 PERFORMANCE LEVEL 2.
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.

2/3	2392181-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN TONY LI 27MAY2021		NAME MALE ASSEMBLY, Z-PACK 2mm HM, 125P TYPE A/B EON	
DIMENSIONS: mm		CHK ALEX XU 27MAY2021		APPROVED HOPE LU 27MAY2021	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-19082		APPLICATION SPEC 114-160149	
0-PLC ±		SIZE A1		CAGE CODE 00779	
1-PLC ±0.2		DRAWING NO. 2392181		RESTRICTED TO	
2-PLC ±		WEIGHT 0		SCALE 4:1	
3-PLC ±		CUSTOMER DRAWING		SHEET 1 of 1	
4-PLC ±				REV A	
ANGLES ±					
MATERIAL 1		FINISH SEE TABLE			