

**BASE**

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

**ARTICULATED THROUGH STEM**

Threaded zinc-plated steel with regulation hexagon.
Assembled to the base by means of zinc-plated steel set screw and washer.

**CUP WASHER FOR STEM BEARING**

Glossy zinc-plated steel.

**STANDARD EXECUTIONS**

- LV.A-ACV: without no-slip disk.
- LV.A-ACV-AS: with NBR rubber no-slip disk, hardness 90 Shore A, supplied assembled with reinforced zinc-plated steel plate fixed by means of two screws.

**FEATURES**

The special knurling under the lower lip of the base provides excellent stability and grip when using the levelling element without no-slip disk even on surfaces that are not perfectly flat.

The components of the levelling elements (base and stem) are supplied already assembled.

**ACCESSORIES ON REQUEST**

Zinc-plated steel nut (see Nuts NT. on page 1283).

**SPECIAL EXECUTIONS ON REQUEST**

AISI 304 stainless steel stems.

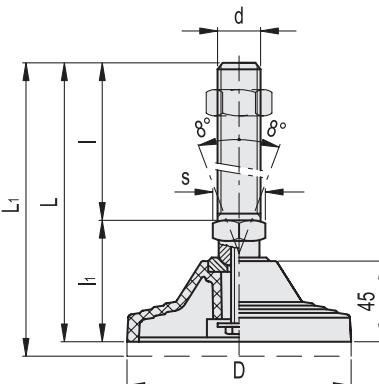
**Conversion Table**

1 mm = 0.039 inch

D	D
mm	inch
125	4.92



ELESA Original design

**LV.A-ACV****LV.A-ACV-AS**

METRIC

Code	Description	Code	Description	D	d	L	Lt#	I	lt	s	Max. limit stati load* [N]	ΔΔ	ΔΔ	#
306921	LV.A-125-ACV-M20x136	310921	LV.A-125-ACV-AS-M20x136	125	M20	200	210	136	64	24	40000	580	830	
306925	LV.A-125-ACV-M20x186	310925	LV.A-125-ACV-AS-M20x186	125	M20	250	260	186	64	24	40000	690	940	
306931	LV.A-125-ACV-M24x136	310931	LV.A-125-ACV-AS-M24x136	125	M24	200	210	136	64	24	40000	730	980	
306935	LV.A-125-ACV-M24x186	310935	LV.A-125-ACV-AS-M24x186	125	M24	250	260	186	64	24	40000	840	1090	
306941	LV.A-125-ACV-M30x136	310941	LV.A-125-ACV-AS-M30x136	125	M30	200	210	136	64	30	40000	940	1190	
306945	LV.A-125-ACV-M30x186	310945	LV.A-125-ACV-AS-M30x186	125	M30	250	260	186	64	30	40000	1030	1280	

* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.

Data with no-slip disk mounted.