P1: M-005
P2: M-048A

Customer No.: | No.:1

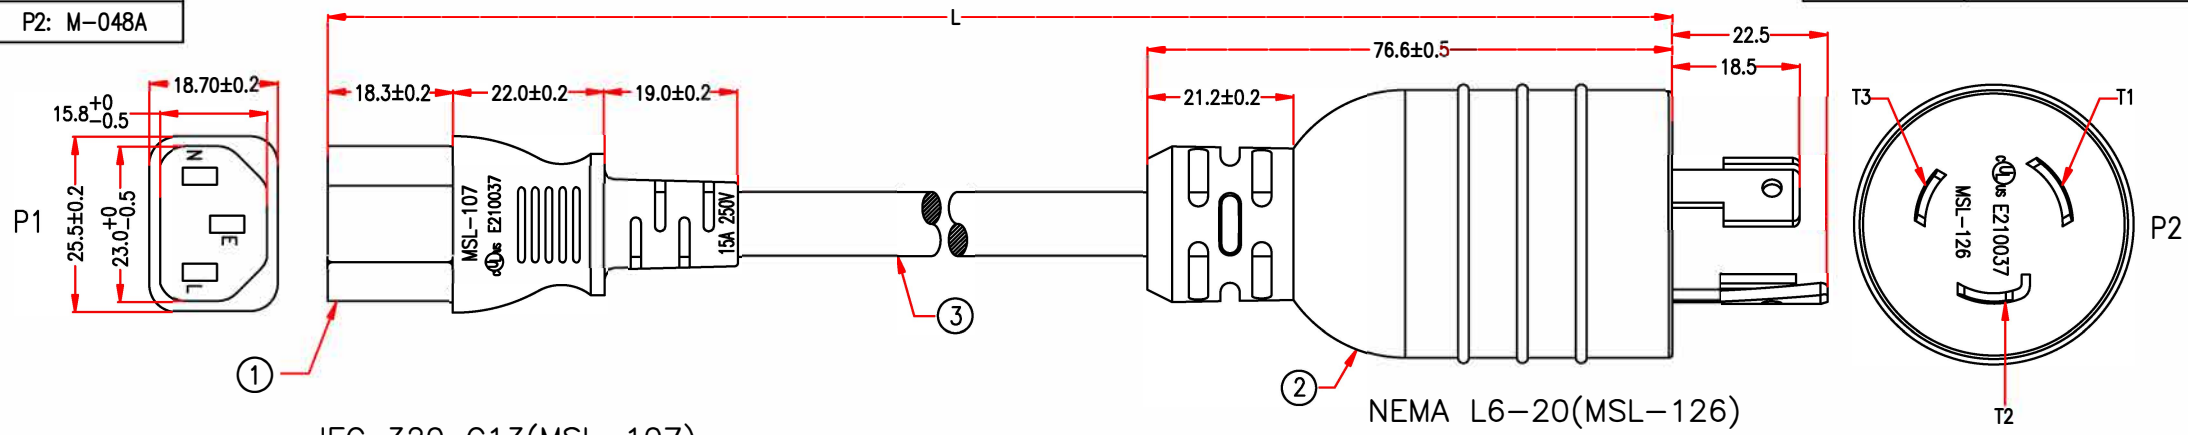

IEC 320 C13(MSL-107)

NEMA L6-20(MSL-126)

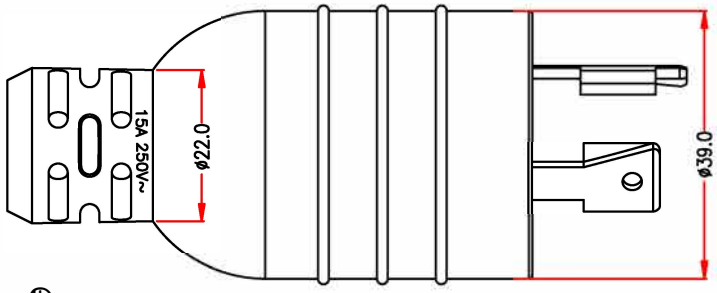

P1,P2: cULus E210037

NOTE: All relevant materials are complied with RoHS directive .
THE MARKING IS CONCAVE LETTERING MOULD

PACKING :



P/N	LENGTH(Lmm)
10W1-L62013-06	1830mm
10W1-L62013-08	2440mm
10W1-L62013-10	3050mm
10W1-L62013-15	4570mm

MARKING: (UL) SJT 3/C 14AWG(2.08MM^2) VW-1 105°C 300V E204978
CSA SJT 3/C 2.08MM^2(14AWG) FT2 105°C 300V 204790 MSL

107126B2F14A(FP283-00)

	P1		P2
BLACK	L	———	T1
WHITE	N	———	T3
GREEN	E	———	T2

No.	DESCRIPTION		Q'TY	Supplier
3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No.EPSVT011403C-147	H5TC21-0304K09	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-L6	A1QC58-0767	1	M767
	TERMINAL: 97656BL-0 (T3)	A1QB39-0257	1	M257
	TERMINAL: 97655BL-0 (T2)	A1QB41-0257	1	M257
	TERMINAL: 97654BL-0 (T1)	A1QB40-0257	1	M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-003	A1QC14-0767	1	M767
	TERMINAL: 2*4mm 98744L	A1QB42-0257	3	M257

APPROVED			Unirise	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm; 201~1000mm ±20mm; 1001 ~1500mm ±25mm; 1501~2100mm ±30mm; 2100mm↑ ±40mm
CHECKED	HU	05/SEP/18	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS
DRAWING	XIAO	05/SEP/18	PRODUCT NO.	PWCD-L620PC13-15A-XXF-BLK — UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm