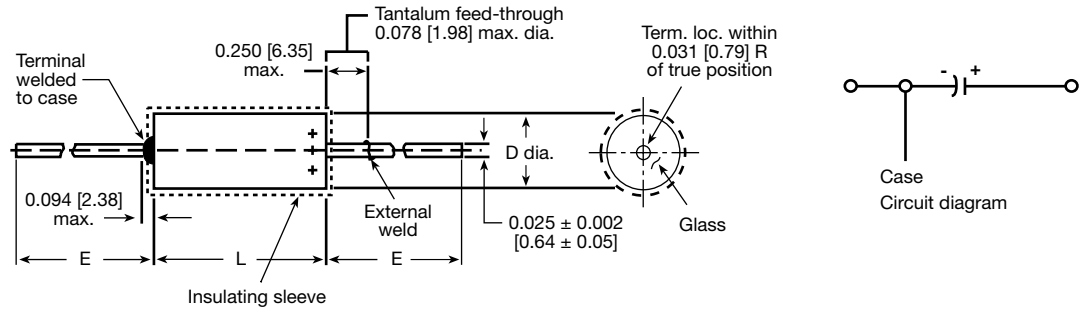


DIMENSIONS in inches [millimeters]

 Style CLR79
 Style CLR81


| CASE CODE | BARE CASE | | WITH INSULATING SLEEVE | | E LEAD LENGTH | WEIGHT (oz. / g) (Max.) |
|-----------|--------------------------------|--|------------------------|------------------|---------------------------------|-------------------------------|
| | D | L | D (MAX.) | L ⁽¹⁾ | | |
| T1 | 0.188 ± 0.016 [4.78 ± 0.41] | 0.453 + 0.031 / - 0.016 [11.51 + 0.79 / - 0.41] | 0.219 [5.56] | 0.565 [14.35] | 1.500 ± 0.250 [38.10 ± 6.35] | 0.09 [2.6] |
| T2 | 0.281 ± 0.016 [7.14 ± 0.41] | 0.641 + 0.031 / - 0.016 [16.28 + 0.79 / - 0.41] | 0.312 [7.92] | 0.785 [19.94] | 2.250 ± 0.250 [57.15 ± 6.35] | 0.22 [6.2] |
| T3 | 0.375 ± 0.016 [9.53 ± 0.41] | 0.766 + 0.031 / - 0.016 [19.46 + 0.79 / - 0.41] | 0.406 [10.31] | 0.95 [24.13] | 2.250 ± 0.250 [57.15 ± 6.35] | 0.41 [11.6] |
| T4 | 0.375 ± 0.016 [9.53 ± 0.41] | 1.062 + 0.031 / - 0.016 [26.97 + 0.79 / - 0.41] | 0.406 [10.31] | 1.31 [33.27] | 2.250 ± 0.250 [57.15 ± 6.35] | 0.62 [17.7] |

Note
⁽¹⁾ Typical length, for reference only

RATINGS AND CASE CODES - M39006/22

| μF | 6 | 8 | 10 | 15 | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
|-----|----|----|----|----|----|----|----|----|----|-----|-----|
| 1.7 | | | | | | | | | | | T1 |
| 2.5 | | | | | | | | | | T1 | |
| 3.5 | | | | | | | | | T1 | | |
| 3.6 | | | | | | | | | | | T1 |
| 4.0 | | | | | | | | T1 | | | |
| 4.7 | | | | | | | | | | T1 | |
| 5.0 | | | | | | | T1 | | | | |
| 6.8 | | | | | | | | | T1 | | |
| 8.0 | | | | | | T1 | | | | | |
| 8.2 | | | | | | | | T1 | | | |
| 9.0 | | | | | | | | | | | T2 |
| 10 | | | | | T1 | | T1 | | | | |
| 11 | | | | | | | | | | T2 | |
| 14 | | | | | | | | | | | T2 |
| 15 | | | | T1 | | T1 | | | T2 | | |
| 18 | | | | | | | | | | | T3 |
| 20 | | | T1 | | | | | T2 | | | |
| 22 | | | | | T1 | | | | | T2 | |
| 25 | | T1 | | | | | T2 | | | | T3 |
| 30 | T1 | | | | | | | | | T3 | |
| 33 | | | | T1 | | | | | T2 | | |
| 39 | | | | | | | | T2 | | | |
| 40 | | | | | | T2 | | | T3 | | |
| 43 | | | | | | | | | | T3 | |
| 47 | | | T1 | | | | T2 | | | | |
| 50 | | | | | T2 | | | T3 | | | |
| 56 | | T1 | | | | | | | T3 | | T4 |
| 60 | | | | | | | T3 | | | | |
| 68 | T1 | | | | | T2 | | T3 | | | |
| 70 | | | | T2 | | | | | | | |
| 82 | | | | | | | T3 | | | | |



| RATINGS AND CASE CODES - M39006/22 | | | | | | | | | | | |
|------------------------------------|----|----|----|----|----|----|----|----|----|-----|-----|
| μF | 6 | 8 | 10 | 15 | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
| 86 | | | | | | | | | | T4 | |
| 100 | | | T2 | | T2 | T3 | | | | | |
| 110 | | | | | | | | | T4 | | |
| 120 | | T2 | | T2 | T3 | | | | | | |
| 140 | T2 | | | | | | | T4 | | | |
| 150 | | | | | | T3 | | | | | |
| 160 | | | | | | | T4 | | | | |
| 170 | | | | T3 | | | | | | | |
| 180 | | | T2 | | T3 | | | | | | |
| 220 | | T2 | | | | | | | | | |
| 250 | | | T3 | | | | | | | | |
| 270 | T2 | | | T3 | | | | | | | |
| 290 | | T3 | | | | | | | | | |
| 300 | | | | | | T4 | | | | | |
| 330 | T3 | | | | | | | | | | |
| 350 | | | | | T4 | | | | | | |
| 390 | | | T3 | | | | | | | | |
| 430 | | T3 | | | | | | | | | |
| 540 | | | | T4 | | | | | | | |
| 560 | T3 | | | | | | | | | | |
| 750 | | | T4 | | | | | | | | |
| 850 | | T4 | | | | | | | | | |
| 1200 | T4 | | | | | | | | | | |

| RATINGS AND CASE CODES - M39006/25 | | | | | | | | | | | |
|------------------------------------|----|----|----|----|----|----|----|----|----|-----|-----|
| μF | 6 | 8 | 10 | 15 | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
| 6.8 | | | | | | | | | | | T1 |
| 10 | | | | | | | | | | T1 | |
| 22 | | | | | | | | | T1 | | |
| 27 | | | | | | | | T1 | | | T2 |
| 33 | | | | | | | T1 | | | | |
| 39 | | | | | | | | | | T2 | |
| 47 | | | | | | | | | | | T3 |
| 56 | | | | | | T1 | | | | | |
| 68 | | | | | T1 | | | | | T3 | |
| 82 | | | | | | | | | T2 | | T4 |
| 100 | | | | T1 | | | | T2 | | | |
| 120 | | | | | | | T2 | | | T4 | |
| 150 | | | T1 | | | | | | | | |
| 180 | | T1 | | | | | | | T3 | | |
| 220 | T1 | | | | | T2 | | T3 | T4 | | |
| 270 | | | | | T2 | | T3 | T4 | | | |
| 330 | | | | | | | T4 | | | | |
| 390 | | | | T2 | | | | | | | |
| 470 | | | | | | T3 | | | | | |
| 560 | | | T2 | | T3 | T4 | | | | | |
| 680 | | T2 | | | T4 | | | | | | |
| 820 | T2 | | | T3 | | | | | | | |
| 1000 | | | | T4 | | | | | | | |
| 1200 | | | T3 | | | | | | | | |
| 1500 | T3 | T3 | T4 | | | | | | | | |
| 1800 | | T4 | | | | | | | | | |
| 2200 | T4 | | | | | | | | | | |



| STANDARD RATINGS / EXTENDED RATINGS: CLR79, M39006/22-XXXX | | | | | | | | | | | | | |
|---|--------------|----------------------------|------------------------------------|----------|-----------|---------------------------|-------------------|------------------|------------------------|-----------------------------------|--------|---------|---|
| CAPACITANCE (μ F) | CASE CODE | CAP. TOL. (\pm %) | PART NO. M39006/22- ⁽¹⁾ | | | MAX. DCL (μ A) AT | | MAX. DF AT | MAX. IMP. AT | MAX. CAPACITANCE CHANGE (%) AT | | | MAX. ⁽²⁾ RIPPLE CURRENT AT +85 °C 40 kHz (mA) |
| | | | FAILURE RATE LEVEL (%/1000 h) | | | +25 °C | +85 °C +125 °C | +25 °C (%) | -55 °C (Ω) | -55 °C | +85 °C | +125 °C | |
| | | | M 1.0 | P 0.1 | R 0.01 | | | | | | | | |
| 6 V_{DC} AT +85 °C; 4 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 30 | T1 | 20 | 0001 | 0221 | 0441 | 1.0 | 2.0 | 9 | 100 | -40 | +10.5 | +12 | 820 |
| 30 | T1 | 10 | 0002 | 0222 | 0442 | 1.0 | 2.0 | 9 | 100 | -40 | +10.5 | +12 | 820 |
| 30 | T1 | 5 | 0003 | 0223 | 0443 | 1.0 | 2.0 | 9 | 100 | -40 | +10.5 | +12 | 820 |
| 68 | T1 | 20 | 0004 | 0224 | 0444 | 1.0 | 2.0 | 15 | 60 | -40 | +14 | +16 | 960 |
| 68 | T1 | 10 | 0005 | 0225 | 0445 | 1.0 | 2.0 | 15 | 60 | -40 | +14 | +16 | 960 |
| 68 | T1 | 5 | 0006 | 0226 | 0446 | 1.0 | 2.0 | 15 | 60 | -40 | +14 | +16 | 960 |
| 140 | T2 | 20 | 0007 | 0227 | 0447 | 1.0 | 3.0 | 21 | 40 | -40 | +14 | +16 | 1200 |
| 140 | T2 | 10 | 0008 | 0228 | 0448 | 1.0 | 3.0 | 21 | 40 | -40 | +14 | +16 | 1200 |
| 140 | T2 | 5 | 0009 | 0229 | 0449 | 1.0 | 3.0 | 21 | 40 | -40 | +14 | +16 | 1200 |
| 270 | T2 | 20 | 0010 | 0230 | 0450 | 1.0 | 6.5 | 45 | 25 | -44 | +17.5 | +20 | 1375 |
| 270 | T2 | 10 | 0011 | 0231 | 0451 | 1.0 | 6.5 | 45 | 25 | -44 | +17.5 | +20 | 1375 |
| 270 | T2 | 5 | 0012 | 0232 | 0452 | 1.0 | 6.5 | 45 | 25 | -44 | +17.5 | +20 | 1375 |
| 330 | T3 | 20 | 0013 | 0233 | 0453 | 2.0 | 7.9 | 36 | 20 | -44 | +14 | +16 | 1800 |
| 330 | T3 | 10 | 0014 | 0234 | 0454 | 2.0 | 7.9 | 36 | 20 | -44 | +14 | +16 | 1800 |
| 330 | T3 | 5 | 0015 | 0235 | 0455 | 2.0 | 7.9 | 36 | 20 | -44 | +14 | +16 | 1800 |
| 560 | T3 | 20 | 0016 | 0236 | 0456 | 2.0 | 13.0 | 55 | 25 | -64 | +17.5 | +20 | 1900 |
| 560 | T3 | 10 | 0017 | 0237 | 0457 | 2.0 | 13.0 | 55 | 25 | -64 | +17.5 | +20 | 1900 |
| 560 | T3 | 5 | 0018 | 0238 | 0458 | 2.0 | 13.0 | 55 | 25 | -64 | +17.5 | +20 | 1900 |
| 1200 | T4 | 20 | 0019 | 0239 | 0459 | 3.0 | 14.0 | 90 | 20 | -80 | +25 | +25 | 2265 |
| 1200 | T4 | 10 | 0020 | 0240 | 0460 | 3.0 | 14.0 | 90 | 20 | -80 | +25 | +25 | 2265 |
| 8 V_{DC} AT +85 °C; 5 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 25 | T1 | 20 | 0021 | 0241 | 0461 | 1.0 | 2.0 | 7.5 | 100 | -40 | +10.5 | +12 | 820 |
| 25 | T1 | 10 | 0022 | 0242 | 0462 | 1.0 | 2.0 | 7.5 | 100 | -40 | +10.5 | +12 | 820 |
| 25 | T1 | 5 | 0023 | 0243 | 0463 | 1.0 | 2.0 | 7.5 | 100 | -40 | +10.5 | +12 | 820 |
| 56 | T1 | 20 | 0024 | 0244 | 0464 | 1.0 | 2.0 | 14 | 59 | -40 | +14 | +16 | 900 |
| 56 | T1 | 10 | 0025 | 0245 | 0465 | 1.0 | 2.0 | 14 | 59 | -40 | +14 | +16 | 900 |
| 56 | T1 | 5 | 0026 | 0246 | 0466 | 1.0 | 2.0 | 14 | 59 | -40 | +14 | +16 | 900 |
| 120 | T2 | 20 | 0027 | 0247 | 0467 | 1.0 | 2.0 | 20 | 50 | -44 | +17.5 | +20 | 1220 |
| 120 | T2 | 10 | 0028 | 0248 | 0468 | 1.0 | 2.0 | 20 | 50 | -44 | +17.5 | +20 | 1220 |
| 120 | T2 | 5 | 0029 | 0249 | 0469 | 1.0 | 2.0 | 20 | 50 | -44 | +17.5 | +20 | 1220 |
| 220 | T2 | 20 | 0030 | 0250 | 0470 | 1.0 | 7.0 | 37 | 30 | -44 | +17.5 | +20 | 1370 |
| 220 | T2 | 10 | 0031 | 0251 | 0471 | 1.0 | 7.0 | 37 | 30 | -44 | +17.5 | +20 | 1370 |
| 220 | T2 | 5 | 0032 | 0252 | 0472 | 1.0 | 7.0 | 37 | 30 | -44 | +17.5 | +20 | 1370 |
| 290 | T3 | 20 | 0033 | 0253 | 0473 | 2.0 | 6.0 | 34 | 25 | -64 | +17.5 | +20 | 1770 |
| 290 | T3 | 10 | 0034 | 0254 | 0474 | 2.0 | 6.0 | 34 | 25 | -64 | +17.5 | +20 | 1770 |
| 290 | T3 | 5 | 0035 | 0255 | 0475 | 2.0 | 6.0 | 34 | 25 | -64 | +17.5 | +20 | 1770 |
| 430 | T3 | 20 | 0036 | 0256 | 0476 | 2.0 | 14.0 | 46 | 25 | -64 | +17.5 | +20 | 1825 |
| 430 | T3 | 10 | 0037 | 0257 | 0477 | 2.0 | 14.0 | 46 | 25 | -64 | +17.5 | +20 | 1825 |
| 430 | T3 | 5 | 0038 | 0258 | 0478 | 2.0 | 14.0 | 46 | 25 | -64 | +17.5 | +20 | 1825 |
| 850 | T4 | 20 | 0039 | 0259 | 0479 | 4.0 | 16.0 | 60 | 22 | -80 | +25 | +25 | 2330 |
| 850 | T4 | 10 | 0040 | 0260 | 0480 | 4.0 | 16.0 | 60 | 22 | -80 | +25 | +25 | 2330 |
| 10 V_{DC} AT +85 °C; 7 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 20 | T1 | 20 | 0041 | 0261 | 0481 | 1.0 | 2.0 | 6 | 175 | -32 | +10.5 | +12 | 820 |
| 20 | T1 | 10 | 0042 | 0262 | 0482 | 1.0 | 2.0 | 6 | 175 | -32 | +10.5 | +12 | 820 |
| 20 | T1 | 5 | 0043 | 0263 | 0483 | 1.0 | 2.0 | 6 | 175 | -32 | +10.5 | +12 | 820 |
| 47 | T1 | 20 | 0044 | 0264 | 0484 | 1.0 | 2.0 | 13 | 100 | -36 | +14 | +16 | 855 |
| 47 | T1 | 10 | 0045 | 0265 | 0485 | 1.0 | 2.0 | 13 | 100 | -36 | +14 | +16 | 855 |
| 47 | T1 | 5 | 0046 | 0266 | 0486 | 1.0 | 2.0 | 13 | 100 | -36 | +14 | +16 | 855 |
| 100 | T2 | 20 | 0047 | 0267 | 0487 | 1.0 | 4.0 | 15 | 60 | -36 | +14 | +16 | 1200 |
| 100 | T2 | 10 | 0048 | 0268 | 0488 | 1.0 | 4.0 | 15 | 60 | -36 | +14 | +16 | 1200 |
| 100 | T2 | 5 | 0049 | 0269 | 0489 | 1.0 | 4.0 | 15 | 60 | -36 | +14 | +16 | 1200 |
| 180 | T2 | 20 | 0050 | 0270 | 0490 | 1.0 | 7.0 | 30 | 40 | -36 | +14 | +16 | 1365 |

Notes

- (1) Dash number will include the letter "H" to indicate the optional vibration and shock requirements (i.e., 53.79 g's random vibration, 80 g's sinusoidal vibration and 500 g's shock)
- (2) For ripple current limits at various temperatures, voltages and frequencies, see Ripple Current table



| STANDARD RATINGS / EXTENDED RATINGS: CLR79, M39006/22-XXXX | | | | | | | | | | | | | |
|--|--------------|----------------------------|--|------|------|---------------------------|---------|------------------|--------------------|-----------------------------------|--------|---------|---|
| CAPACITANCE (μ F) | CASE CODE | CAP. TOL. (\pm %) | PART NO. M39006/22- ⁽¹⁾ FAILURE RATE LEVEL (%/1000 h) | | | MAX. DCL (μ A) AT | | MAX. DF AT | MAX. IMP. AT | MAX. CAPACITANCE CHANGE (%) AT | | | MAX. ⁽²⁾ RIPPLE CURRENT AT +85 °C |
| | | | M | P | R | +25 °C | +85 °C | +25 °C | -55 °C | -55 °C | +85 °C | +125 °C | 40 kHz |
| | | | 1.0 | 0.1 | 0.01 | | +125 °C | (%) | (Ω) | | | | |
| 10 V_{DC} AT +85 °C; 7 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 180 | T2 | 10 | 0051 | 0271 | 0491 | 1.0 | 7.0 | 30 | 40 | -36 | +14 | +16 | 1365 |
| 180 | T2 | 5 | 0052 | 0272 | 0492 | 1.0 | 7.0 | 30 | 40 | -36 | +14 | +16 | 1365 |
| 250 | T3 | 20 | 0053 | 0273 | 0493 | 2.0 | 10.0 | 30 | 30 | -40 | +14 | +16 | 1720 |
| 250 | T3 | 10 | 0054 | 0274 | 0494 | 2.0 | 10.0 | 30 | 30 | -40 | +14 | +16 | 1720 |
| 250 | T3 | 5 | 0055 | 0275 | 0495 | 2.0 | 10.0 | 30 | 30 | -40 | +14 | +16 | 1720 |
| 390 | T3 | 20 | 0056 | 0276 | 0496 | 2.0 | 16.0 | 44 | 25 | -64 | +17.5 | +20 | 1800 |
| 390 | T3 | 10 | 0057 | 0277 | 0497 | 2.0 | 16.0 | 44 | 25 | -64 | +17.5 | +20 | 1800 |
| 390 | T3 | 5 | 0058 | 0278 | 0498 | 2.0 | 16.0 | 44 | 25 | -64 | +17.5 | +20 | 1800 |
| 750 | T4 | 20 | 0059 | 0279 | 0499 | 4.0 | 16.0 | 50 | 23 | -80 | +25 | +25 | 2360 |
| 750 | T4 | 10 | 0060 | 0280 | 0500 | 4.0 | 16.0 | 50 | 23 | -80 | +25 | +25 | 2360 |
| 15 V_{DC} AT +85 °C; 10 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 15 | T1 | 20 | 0061 | 0281 | 0501 | 1.0 | 2.0 | 5 | 155 | -24 | +10.5 | +12 | 780 |
| 15 | T1 | 10 | 0062 | 0282 | 0502 | 1.0 | 2.0 | 5 | 155 | -24 | +10.5 | +12 | 780 |
| 15 | T1 | 5 | 0063 | 0283 | 0503 | 1.0 | 2.0 | 5 | 155 | -24 | +10.5 | +12 | 780 |
| 33 | T1 | 20 | 0064 | 0284 | 0504 | 1.0 | 2.0 | 10 | 90 | -28 | +14 | +16 | 820 |
| 33 | T1 | 10 | 0065 | 0285 | 0505 | 1.0 | 2.0 | 10 | 90 | -28 | +14 | +16 | 820 |
| 33 | T1 | 5 | 0066 | 0286 | 0506 | 1.0 | 2.0 | 10 | 90 | -28 | +14 | +16 | 820 |
| 70 | T2 | 20 | 0067 | 0287 | 0507 | 1.0 | 4.0 | 13 | 75 | -28 | +14 | +16 | 1150 |
| 70 | T2 | 10 | 0068 | 0288 | 0508 | 1.0 | 4.0 | 13 | 75 | -28 | +14 | +16 | 1150 |
| 70 | T2 | 5 | 0069 | 0289 | 0509 | 1.0 | 4.0 | 13 | 75 | -28 | +14 | +16 | 1150 |
| 120 | T2 | 20 | 0070 | 0290 | 0510 | 1.0 | 7.0 | 18 | 50 | -28 | +17.5 | +20 | 1450 |
| 120 | T2 | 10 | 0071 | 0291 | 0511 | 1.0 | 7.0 | 18 | 50 | -28 | +17.5 | +20 | 1450 |
| 120 | T2 | 5 | 0072 | 0292 | 0512 | 1.0 | 7.0 | 18 | 50 | -28 | +17.5 | +20 | 1450 |
| 170 | T3 | 20 | 0073 | 0293 | 0513 | 2.0 | 10.0 | 25 | 35 | -32 | +14 | +16 | 1480 |
| 170 | T3 | 10 | 0074 | 0294 | 0514 | 2.0 | 10.0 | 25 | 35 | -32 | +14 | +16 | 1480 |
| 170 | T3 | 5 | 0075 | 0295 | 0515 | 2.0 | 10.0 | 25 | 35 | -32 | +14 | +16 | 1480 |
| 270 | T3 | 20 | 0076 | 0296 | 0516 | 2.0 | 16.0 | 32 | 30 | -56 | +17.5 | +20 | 1740 |
| 270 | T3 | 10 | 0077 | 0297 | 0517 | 2.0 | 16.0 | 32 | 30 | -56 | +17.5 | +20 | 1740 |
| 270 | T3 | 5 | 0078 | 0298 | 0518 | 2.0 | 16.0 | 32 | 30 | -56 | +17.5 | +20 | 1740 |
| 540 | T4 | 20 | 0079 | 0299 | 0519 | 6.0 | 24.0 | 40 | 23 | -80 | +25 | +25 | 2330 |
| 540 | T4 | 10 | 0080 | 0300 | 0520 | 6.0 | 24.0 | 40 | 23 | -80 | +25 | +25 | 2330 |
| 25 V_{DC} AT +85 °C; 15 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 10 | T1 | 20 | 0081 | 0301 | 0521 | 1.0 | 2.0 | 4 | 220 | -16 | +8 | +9 | 715 |
| 10 | T1 | 10 | 0082 | 0302 | 0522 | 1.0 | 2.0 | 4 | 220 | -16 | +8 | +9 | 715 |
| 10 | T1 | 5 | 0083 | 0303 | 0523 | 1.0 | 2.0 | 4 | 220 | -16 | +8 | +9 | 715 |
| 22 | T1 | 20 | 0084 | 0304 | 0524 | 1.0 | 2.0 | 6.6 | 140 | -20 | +10.5 | +12 | 825 |
| 22 | T1 | 10 | 0085 | 0305 | 0525 | 1.0 | 2.0 | 6.6 | 140 | -20 | +10.5 | +12 | 825 |
| 22 | T1 | 5 | 0086 | 0306 | 0526 | 1.0 | 2.0 | 6.6 | 140 | -20 | +10.5 | +12 | 825 |
| 50 | T2 | 20 | 0087 | 0307 | 0527 | 1.0 | 2.0 | 11.0 | 70 | -28 | +13 | +15 | 1130 |
| 50 | T2 | 10 | 0088 | 0308 | 0528 | 1.0 | 2.0 | 11.0 | 70 | -28 | +13 | +15 | 1130 |
| 50 | T2 | 5 | 0089 | 0309 | 0529 | 1.0 | 2.0 | 11.0 | 70 | -28 | +13 | +15 | 1130 |
| 100 | T2 | 20 | 0090 | 0310 | 0530 | 1.0 | 10.0 | 15 | 50 | -28 | +13 | +15 | 1435 |
| 100 | T2 | 10 | 0091 | 0311 | 0531 | 1.0 | 10.0 | 15 | 50 | -28 | +13 | +15 | 1435 |
| 100 | T2 | 5 | 0092 | 0312 | 0532 | 1.0 | 10.0 | 15 | 50 | -28 | +13 | +15 | 1435 |
| 120 | T3 | 20 | 0093 | 0313 | 0533 | 2.0 | 6.0 | 21 | 38 | -32 | +13 | +15 | 1450 |
| 120 | T3 | 10 | 0094 | 0314 | 0534 | 2.0 | 6.0 | 21 | 38 | -32 | +13 | +15 | 1450 |
| 120 | T3 | 5 | 0095 | 0315 | 0535 | 2.0 | 6.0 | 21 | 38 | -32 | +13 | +15 | 1450 |
| 180 | T3 | 20 | 0096 | 0316 | 0536 | 2.0 | 18.0 | 26 | 32 | -48 | +13 | +15 | 1525 |
| 180 | T3 | 10 | 0097 | 0317 | 0537 | 2.0 | 18.0 | 26 | 32 | -48 | +13 | +15 | 1525 |
| 180 | T3 | 5 | 0098 | 0318 | 0538 | 2.0 | 18.0 | 26 | 32 | -48 | +13 | +15 | 1525 |
| 350 | T4 | 20 | 0099 | 0319 | 0539 | 7.0 | 28.0 | 35 | 24 | -70 | +25 | +25 | 1970 |
| 350 | T4 | 10 | 0100 | 0320 | 0540 | 7.0 | 28.0 | 35 | 24 | -70 | +25 | +25 | 1970 |

Notes

- (1) Dash number will include the letter "H" to indicate the optional vibration and shock requirements (i.e., 53.79 g's random vibration, 80 g's sinusoidal vibration and 500 g's shock)
- (2) For ripple current limits at various temperatures, voltages and frequencies, see Ripple Current table



| STANDARD RATINGS / EXTENDED RATINGS: CLR79, M39006/22-XXXX | | | | | | | | | | | | | |
|--|--------------|----------------------------|--|------|------|---------------------------|---------|------------------|--------------------|-----------------------------------|--------|---------|---|
| CAPACITANCE (μ F) | CASE CODE | CAP. TOL. (\pm %) | PART NO. M39006/22- ⁽¹⁾ FAILURE RATE LEVEL (%/1000 h) | | | MAX. DCL (μ A) AT | | MAX. DF AT | MAX. IMP. AT | MAX. CAPACITANCE CHANGE (%) AT | | | MAX. ⁽²⁾ RIPPLE CURRENT AT +85 °C |
| | | | M | P | R | +25 °C | +85 °C | +25 °C | -55 °C | -55 °C | +85 °C | +125 °C | 40 kHz |
| | | | 1.0 | 0.1 | 0.01 | | +125 °C | (%) | (Ω) | | | | (mA) |
| 30 V_{DC} AT +85 °C; 20 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 8.0 | T1 | 20 | 0101 | 0321 | 0541 | 1.0 | 2.0 | 4 | 275 | -16 | +8 | +12 | 640 |
| 8.0 | T1 | 10 | 0102 | 0322 | 0542 | 1.0 | 2.0 | 4 | 275 | -16 | +8 | +12 | 640 |
| 8.0 | T1 | 5 | 0103 | 0323 | 0543 | 1.0 | 2.0 | 4 | 275 | -16 | +8 | +12 | 640 |
| 15 | T1 | 20 | 0104 | 0324 | 0544 | 1.0 | 2.0 | 5 | 175 | -20 | +10.5 | +12 | 780 |
| 15 | T1 | 10 | 0105 | 0325 | 0545 | 1.0 | 2.0 | 5 | 175 | -20 | +10.5 | +12 | 780 |
| 15 | T1 | 5 | 0106 | 0326 | 0546 | 1.0 | 2.0 | 5 | 175 | -20 | +10.5 | +12 | 780 |
| 40 | T2 | 20 | 0107 | 0327 | 0547 | 1.0 | 5.0 | 10 | 65 | -24 | +10.5 | +12 | 1120 |
| 40 | T2 | 10 | 0108 | 0328 | 0548 | 1.0 | 5.0 | 10 | 65 | -24 | +10.5 | +12 | 1120 |
| 40 | T2 | 5 | 0109 | 0329 | 0549 | 1.0 | 5.0 | 10 | 65 | -24 | +10.5 | +12 | 1120 |
| 68 | T2 | 20 | 0110 | 0330 | 0550 | 1.0 | 8.0 | 13 | 60 | -24 | +13 | +15 | 1285 |
| 68 | T2 | 10 | 0111 | 0331 | 0551 | 1.0 | 8.0 | 13 | 60 | -24 | +13 | +15 | 1285 |
| 68 | T2 | 5 | 0112 | 0332 | 0552 | 1.0 | 8.0 | 13 | 60 | -24 | +13 | +15 | 1285 |
| 100 | T3 | 20 | 0113 | 0333 | 0553 | 2.0 | 12.0 | 17 | 40 | -28 | +10.5 | +12 | 1450 |
| 100 | T3 | 10 | 0114 | 0334 | 0554 | 2.0 | 12.0 | 17 | 40 | -28 | +10.5 | +12 | 1450 |
| 100 | T3 | 5 | 0115 | 0335 | 0555 | 2.0 | 12.0 | 17 | 40 | -28 | +10.5 | +12 | 1450 |
| 150 | T3 | 20 | 0116 | 0336 | 0556 | 2.0 | 18.0 | 23 | 35 | -48 | +13 | +15 | 1525 |
| 150 | T3 | 10 | 0117 | 0337 | 0557 | 2.0 | 18.0 | 23 | 35 | -48 | +13 | +15 | 1525 |
| 150 | T3 | 5 | 0118 | 0338 | 0558 | 2.0 | 18.0 | 23 | 35 | -48 | +13 | +15 | 1525 |
| 300 | T4 | 20 | 0119 | 0339 | 0559 | 8.0 | 32.0 | 31 | 25 | -60 | +25 | +25 | 1950 |
| 300 | T4 | 10 | 0120 | 0340 | 0560 | 8.0 | 32.0 | 31 | 25 | -60 | +25 | +25 | 1950 |
| 50 V_{DC} AT +85 °C; 30 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 5.0 | T1 | 20 | 0121 | 0341 | 0561 | 1.0 | 2.0 | 3 | 400 | -16 | +5 | +6 | 580 |
| 5.0 | T1 | 10 | 0122 | 0342 | 0562 | 1.0 | 2.0 | 3 | 400 | -16 | +5 | +6 | 580 |
| 5.0 | T1 | 5 | 0123 | 0343 | 0563 | 1.0 | 2.0 | 3 | 400 | -16 | +5 | +6 | 580 |
| 10 | T1 | 20 | 0124 | 0344 | 0564 | 1.0 | 2.0 | 4 | 250 | -24 | +8 | +9 | 715 |
| 10 | T1 | 10 | 0125 | 0345 | 0565 | 1.0 | 2.0 | 4 | 250 | -24 | +8 | +9 | 715 |
| 10 | T1 | 5 | 0126 | 0346 | 0566 | 1.0 | 2.0 | 4 | 250 | -24 | +8 | +9 | 715 |
| 25 | T2 | 20 | 0127 | 0347 | 0567 | 1.0 | 5.0 | 8 | 95 | -20 | +10.5 | +12 | 1005 |
| 25 | T2 | 10 | 0128 | 0348 | 0568 | 1.0 | 5.0 | 8 | 95 | -20 | +10.5 | +12 | 1005 |
| 25 | T2 | 5 | 0129 | 0349 | 0569 | 1.0 | 5.0 | 8 | 95 | -20 | +10.5 | +12 | 1005 |
| 47 | T2 | 20 | 0130 | 0350 | 0570 | 1.0 | 9.0 | 11 | 70 | -28 | +13 | +15 | 1155 |
| 47 | T2 | 10 | 0131 | 0351 | 0571 | 1.0 | 9.0 | 11 | 70 | -28 | +13 | +15 | 1155 |
| 47 | T2 | 5 | 0132 | 0352 | 0572 | 1.0 | 9.0 | 11 | 70 | -28 | +13 | +15 | 1155 |
| 60 | T3 | 20 | 0133 | 0353 | 0573 | 2.0 | 12.0 | 12 | 45 | -16 | +10.5 | +12 | 1335 |
| 60 | T3 | 10 | 0134 | 0354 | 0574 | 2.0 | 12.0 | 12 | 45 | -16 | +10.5 | +12 | 1335 |
| 60 | T3 | 5 | 0135 | 0355 | 0575 | 2.0 | 12.0 | 12 | 45 | -16 | +10.5 | +12 | 1335 |
| 82 | T3 | 20 | 0136 | 0356 | 0576 | 2.0 | 16.0 | 15 | 45 | -32 | +13 | +15 | 1400 |
| 82 | T3 | 10 | 0137 | 0357 | 0577 | 2.0 | 16.0 | 15 | 45 | -32 | +13 | +15 | 1400 |
| 82 | T3 | 5 | 0138 | 0358 | 0578 | 2.0 | 16.0 | 15 | 45 | -32 | +13 | +15 | 1400 |
| 160 | T4 | 20 | 0139 | 0359 | 0579 | 8.0 | 32.0 | 17 | 27 | -50 | +25 | +25 | 1900 |
| 160 | T4 | 10 | 0140 | 0360 | 0580 | 8.0 | 32.0 | 17 | 27 | -50 | +25 | +25 | 1900 |
| 60 V_{DC} AT +85 °C; 40 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 4.0 | T1 | 20 | 0141 | 0361 | 0581 | 1.0 | 2.0 | 2.8 | 550 | -16 | +5 | +6 | 525 |
| 4.0 | T1 | 10 | 0142 | 0362 | 0582 | 1.0 | 2.0 | 2.8 | 550 | -16 | +5 | +6 | 525 |
| 4.0 | T1 | 5 | 0143 | 0363 | 0583 | 1.0 | 2.0 | 2.8 | 550 | -16 | +5 | +6 | 525 |
| 8.2 | T1 | 20 | 0144 | 0364 | 0584 | 1.0 | 2.0 | 4 | 275 | -24 | +8 | +9 | 625 |
| 8.2 | T1 | 10 | 0145 | 0365 | 0585 | 1.0 | 2.0 | 4 | 275 | -24 | +8 | +9 | 625 |
| 8.2 | T1 | 5 | 0146 | 0366 | 0586 | 1.0 | 2.0 | 4 | 275 | -24 | +8 | +9 | 625 |
| 20 | T2 | 20 | 0147 | 0367 | 0587 | 1.0 | 5.0 | 7 | 105 | -16 | +10.5 | +12 | 930 |
| 20 | T2 | 10 | 0148 | 0368 | 0588 | 1.0 | 5.0 | 7 | 105 | -16 | +10.5 | +12 | 930 |
| 20 | T2 | 5 | 0149 | 0369 | 0589 | 1.0 | 5.0 | 7 | 105 | -16 | +10.5 | +12 | 930 |
| 39 | T2 | 20 | 0150 | 0370 | 0590 | 1.0 | 9.0 | 10 | 90 | -28 | +10.5 | +12 | 1110 |

Notes

- (1) Dash number will include the letter "H" to indicate the optional vibration and shock requirements (i.e., 53.79 g's random vibration, 80 g's sinusoidal vibration and 500 g's shock)
- (2) For ripple current limits at various temperatures, voltages and frequencies, see Ripple Current table



| STANDARD RATINGS / EXTENDED RATINGS: CLR79, M39006/22-XXXX | | | | | | | | | | | | | |
|---|--------------|----------------------------|--|------|------|---------------------------|---------|------------------|--------------------|-----------------------------------|--------|---------|---|
| CAPACITANCE (μ F) | CASE CODE | CAP. TOL. (\pm %) | PART NO. M39006/22- ⁽¹⁾ FAILURE RATE LEVEL (%/1000 h) | | | MAX. DCL (μ A) AT | | MAX. DF AT | MAX. IMP. AT | MAX. CAPACITANCE CHANGE (%) AT | | | MAX. ⁽²⁾ RIPPLE CURRENT AT +85 °C |
| | | | M | P | R | +25 °C | +85 °C | +25 °C | -55 °C | -55 °C | +85 °C | +125 °C | 40 kHz |
| | | | 1.0 | 0.1 | 0.01 | | +125 °C | (%) | (Ω) | | | | (mA) |
| 60 V_{DC} AT +85 °C; 40 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 39 | T2 | 10 | 0151 | 0371 | 0591 | 1.0 | 9.0 | 10 | 90 | -28 | +10.5 | +12 | 1110 |
| 39 | T2 | 5 | 0152 | 0372 | 0592 | 1.0 | 9.0 | 10 | 90 | -28 | +10.5 | +12 | 1110 |
| 50 | T3 | 20 | 0153 | 0373 | 0593 | 2.0 | 12.0 | 10 | 50 | -16 | +10.5 | +12 | 1330 |
| 50 | T3 | 10 | 0154 | 0374 | 0594 | 2.0 | 12.0 | 10 | 50 | -16 | +10.5 | +12 | 1330 |
| 50 | T3 | 5 | 0155 | 0375 | 0595 | 2.0 | 12.0 | 10 | 50 | -16 | +10.5 | +12 | 1330 |
| 68 | T3 | 20 | 0156 | 0376 | 0596 | 2.0 | 16.0 | 13 | 50 | -32 | +10.5 | +12 | 1365 |
| 68 | T3 | 10 | 0157 | 0377 | 0597 | 2.0 | 16.0 | 13 | 50 | -32 | +10.5 | +12 | 1365 |
| 68 | T3 | 5 | 0158 | 0378 | 0598 | 2.0 | 16.0 | 13 | 50 | -32 | +10.5 | +12 | 1365 |
| 140 | T4 | 20 | 0159 | 0379 | 0599 | 8.0 | 32.0 | 16 | 28 | -40 | +20 | +20 | 1850 |
| 140 | T4 | 10 | 0160 | 0380 | 0600 | 8.0 | 32.0 | 16 | 28 | -40 | +20 | +20 | 1850 |
| 75 V_{DC} AT +85 °C; 50 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 3.5 | T1 | 20 | 0161 | 0381 | 0601 | 1.0 | 2.0 | 2.5 | 650 | -16 | +5 | +6 | 525 |
| 3.5 | T1 | 10 | 0162 | 0382 | 0602 | 1.0 | 2.0 | 2.5 | 650 | -16 | +5 | +6 | 525 |
| 3.5 | T1 | 5 | 0163 | 0383 | 0603 | 1.0 | 2.0 | 2.5 | 650 | -16 | +5 | +6 | 525 |
| 6.8 | T1 | 20 | 0164 | 0384 | 0604 | 1.0 | 2.0 | 3.5 | 300 | -20 | +8 | +9 | 610 |
| 6.8 | T1 | 10 | 0165 | 0385 | 0605 | 1.0 | 2.0 | 3.5 | 300 | -20 | +8 | +9 | 610 |
| 6.8 | T1 | 5 | 0166 | 0386 | 0606 | 1.0 | 2.0 | 3.5 | 300 | -20 | +8 | +9 | 610 |
| 15 | T2 | 20 | 0167 | 0387 | 0607 | 1.0 | 5.0 | 6 | 150 | -16 | +8 | +9 | 890 |
| 15 | T2 | 10 | 0168 | 0388 | 0608 | 1.0 | 5.0 | 6 | 150 | -16 | +8 | +9 | 890 |
| 15 | T2 | 5 | 0169 | 0389 | 0609 | 1.0 | 5.0 | 6 | 150 | -16 | +8 | +9 | 890 |
| 33 | T2 | 20 | 0170 | 0390 | 0610 | 1.0 | 10.0 | 10 | 90 | -24 | +10.5 | +15 | 1000 |
| 33 | T2 | 10 | 0171 | 0391 | 0611 | 1.0 | 10.0 | 10 | 90 | -24 | +10.5 | +15 | 1000 |
| 33 | T2 | 5 | 0172 | 0392 | 0612 | 1.0 | 10.0 | 10 | 90 | -24 | +10.5 | +15 | 1000 |
| 40 | T3 | 20 | 0173 | 0393 | 0613 | 2.0 | 12.0 | 9 | 60 | -16 | +10.5 | +12 | 1250 |
| 40 | T3 | 10 | 0174 | 0394 | 0614 | 2.0 | 12.0 | 9 | 60 | -16 | +10.5 | +12 | 1250 |
| 40 | T3 | 5 | 0175 | 0395 | 0615 | 2.0 | 12.0 | 9 | 60 | -16 | +10.5 | +12 | 1250 |
| 56 | T3 | 20 | 0176 | 0396 | 0616 | 2.0 | 17.0 | 11 | 60 | -28 | +10.5 | +15 | 1335 |
| 56 | T3 | 10 | 0177 | 0397 | 0617 | 2.0 | 17.0 | 11 | 60 | -28 | +10.5 | +15 | 1335 |
| 56 | T3 | 5 | 0178 | 0398 | 0618 | 2.0 | 17.0 | 11 | 60 | -28 | +10.5 | +15 | 1335 |
| 110 | T4 | 20 | 0179 | 0399 | 0619 | 9.0 | 36.0 | 12 | 29 | -35 | +20 | +20 | 1850 |
| 110 | T4 | 10 | 0180 | 0400 | 0620 | 9.0 | 36.0 | 12 | 29 | -35 | +20 | +20 | 1850 |
| 100 V_{DC} AT +85 °C; 65 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 2.5 | T1 | 20 | 0181 | 0401 | 0621 | 1.0 | 2.0 | 2 | 950 | -16 | +7 | +8 | 505 |
| 2.5 | T1 | 10 | 0182 | 0402 | 0622 | 1.0 | 2.0 | 2 | 950 | -16 | +7 | +8 | 505 |
| 2.5 | T1 | 5 | 0183 | 0403 | 0623 | 1.0 | 2.0 | 2 | 950 | -16 | +7 | +8 | 505 |
| 4.7 | T1 | 20 | 0184 | 0404 | 0624 | 1.0 | 2.0 | 3 | 500 | -16 | +7 | +8 | 565 |
| 4.7 | T1 | 10 | 0185 | 0405 | 0625 | 1.0 | 2.0 | 3 | 500 | -16 | +7 | +8 | 565 |
| 4.7 | T1 | 5 | 0186 | 0406 | 0626 | 1.0 | 2.0 | 3 | 500 | -16 | +7 | +8 | 565 |
| 11 | T2 | 20 | 0187 | 0407 | 0627 | 1.0 | 4.0 | 5 | 200 | -16 | +8 | +8 | 835 |
| 11 | T2 | 10 | 0188 | 0408 | 0628 | 1.0 | 4.0 | 5 | 200 | -16 | +8 | +8 | 835 |
| 11 | T2 | 5 | 0189 | 0409 | 0629 | 1.0 | 4.0 | 5 | 200 | -16 | +8 | +8 | 835 |
| 22 | T2 | 20 | 0190 | 0410 | 0630 | 1.0 | 9.0 | 7.5 | 100 | -16 | +8 | +8 | 965 |
| 22 | T2 | 10 | 0191 | 0411 | 0631 | 1.0 | 9.0 | 7.5 | 100 | -16 | +8 | +8 | 965 |
| 22 | T2 | 5 | 0192 | 0412 | 0632 | 1.0 | 9.0 | 7.5 | 100 | -16 | +8 | +8 | 965 |
| 30 | T3 | 20 | 0193 | 0413 | 0633 | 2.0 | 12.0 | 7 | 80 | -16 | +8 | +8 | 1240 |
| 30 | T3 | 10 | 0194 | 0414 | 0634 | 2.0 | 12.0 | 7 | 80 | -16 | +8 | +8 | 1240 |
| 30 | T3 | 5 | 0195 | 0415 | 0635 | 2.0 | 12.0 | 7 | 80 | -16 | +8 | +8 | 1240 |
| 43 | T3 | 20 | 0196 | 0416 | 0636 | 2.0 | 17.0 | 8.5 | 70 | -20 | +8 | +8 | 1335 |
| 43 | T3 | 10 | 0197 | 0417 | 0637 | 2.0 | 17.0 | 8.5 | 70 | -20 | +8 | +8 | 1335 |
| 43 | T3 | 5 | 0198 | 0418 | 0638 | 2.0 | 17.0 | 8.5 | 70 | -20 | +8 | +8 | 1335 |
| 86 | T4 | 20 | 0199 | 0419 | 0639 | 9.0 | 36.0 | 10 | 30 | -25 | +15 | +15 | 1800 |
| 86 | T4 | 10 | 0200 | 0420 | 0640 | 9.0 | 36.0 | 10 | 30 | -25 | +15 | +15 | 1800 |

Notes

- (1) Dash number will include the letter "H" to indicate the optional vibration and shock requirements (i.e., 53.79 g's random vibration, 80 g's sinusoidal vibration and 500 g's shock)
- (2) For ripple current limits at various temperatures, voltages and frequencies, see Ripple Current table



| STANDARD RATINGS / EXTENDED RATINGS: CLR79, M39006/22-XXXX | | | | | | | | | | | | | |
|--|--------------|----------------------------|--|------|------|---------------------------|---------|------------------|--------------------|-----------------------------------|--------|---------|---|
| CAPACITANCE (μ F) | CASE CODE | CAP. TOL. (\pm %) | PART NO. M39006/22- ⁽¹⁾ FAILURE RATE LEVEL (%/1000 h) | | | MAX. DCL (μ A) AT | | MAX. DF AT | MAX. IMP. AT | MAX. CAPACITANCE CHANGE (%) AT | | | MAX. ⁽²⁾ RIPPLE CURRENT AT +85 °C |
| | | | M | P | R | +25 °C | +85 °C | +25 °C | -55 °C | -55 °C | +85 °C | +125 °C | 40 kHz |
| | | | 1.0 | 0.1 | 0.01 | | +125 °C | (%) | (Ω) | | | | |
| 125 V _{DC} AT +85 °C; 85 V _{DC} AT +125 °C | | | | | | | | | | | | | |
| 1.7 | T1 | 20 | 0201 | 0421 | 0641 | 1.0 | 2.0 | 2 | 1250 | -16 | +7 | +8 | 415 |
| 1.7 | T1 | 10 | 0202 | 0422 | 0642 | 1.0 | 2.0 | 2 | 1250 | -16 | +7 | +8 | 415 |
| 1.7 | T1 | 5 | 0203 | 0423 | 0643 | 1.0 | 2.0 | 2 | 1250 | -16 | +7 | +8 | 415 |
| 3.6 | T1 | 20 | 0204 | 0424 | 0644 | 1.0 | 2.0 | 2.7 | 600 | -16 | +7 | +8 | 520 |
| 3.6 | T1 | 10 | 0205 | 0425 | 0645 | 1.0 | 2.0 | 2.7 | 600 | -16 | +7 | +8 | 520 |
| 3.6 | T1 | 5 | 0206 | 0426 | 0646 | 1.0 | 2.0 | 2.7 | 600 | -16 | +7 | +8 | 520 |
| 9.0 | T2 | 20 | 0207 | 0427 | 0647 | 1.0 | 5.0 | 5 | 240 | -16 | +7 | +8 | 755 |
| 9.0 | T2 | 10 | 0208 | 0428 | 0648 | 1.0 | 5.0 | 5 | 240 | -16 | +7 | +8 | 755 |
| 9.0 | T2 | 5 | 0209 | 0429 | 0649 | 1.0 | 5.0 | 5 | 240 | -16 | +7 | +8 | 755 |
| 14 | T2 | 20 | 0210 | 0430 | 0650 | 1.0 | 7.0 | 6 | 167 | -16 | +7 | +8 | 860 |
| 14 | T2 | 10 | 0211 | 0431 | 0651 | 1.0 | 7.0 | 6 | 167 | -16 | +7 | +8 | 860 |
| 14 | T2 | 5 | 0212 | 0432 | 0652 | 1.0 | 7.0 | 6 | 167 | -16 | +7 | +8 | 860 |
| 18 | T3 | 20 | 0213 | 0433 | 0653 | 2.0 | 9.0 | 5 | 129 | -16 | +7 | +8 | 1130 |
| 18 | T3 | 10 | 0214 | 0434 | 0654 | 2.0 | 9.0 | 5 | 129 | -16 | +7 | +8 | 1130 |
| 18 | T3 | 5 | 0215 | 0435 | 0655 | 2.0 | 9.0 | 5 | 129 | -16 | +7 | +8 | 1130 |
| 25 | T3 | 20 | 0216 | 0436 | 0656 | 2.0 | 13.0 | 6 | 93 | -16 | +7 | +8 | 1200 |
| 25 | T3 | 10 | 0217 | 0437 | 0657 | 2.0 | 13.0 | 6 | 93 | -16 | +7 | +8 | 1200 |
| 25 | T3 | 5 | 0218 | 0438 | 0658 | 2.0 | 13.0 | 6 | 93 | -16 | +7 | +8 | 1200 |
| 56 | T4 | 20 | 0219 | 0439 | 0659 | 10.0 | 40.0 | 6.5 | 32 | -25 | +15 | +15 | 1800 |
| 56 | T4 | 10 | 0220 | 0440 | 0660 | 10.0 | 40.0 | 6.5 | 32 | -25 | +15 | +15 | 1800 |

Notes

- (1) Dash number will include the letter "H" to indicate the optional vibration and shock requirements (i.e., 53.79 g's random vibration, 80 g's sinusoidal vibration and 500 g's shock)
- (2) For ripple current limits at various temperatures, voltages and frequencies, see Ripple Current table

| STANDARD RATINGS / EXTENDED RATINGS: CLR81, M39006/25-XXXX | | | | | | | | | | | | | |
|--|--------------|----------------------------|--|------|------|---------------------------|---------|------------------|--------------------|-----------------------------------|--------|---------|---|
| CAPACITANCE (μ F) | CASE CODE | CAP. TOL. (\pm %) | PART NO. M39006/25- ⁽¹⁾ FAILURE RATE LEVEL (%/1000 h) | | | MAX. DCL (μ A) AT | | MAX. DF AT | MAX. IMP. AT | MAX. CAPACITANCE CHANGE (%) AT | | | MAX. ⁽²⁾ RIPPLE CURRENT AT +85 °C |
| | | | M | P | R | +25 °C | +85 °C | +25 °C | -55 °C | -55 °C | +85 °C | +125 °C | 40 kHz |
| | | | 1.0 | 0.1 | 0.01 | | +125 °C | (%) | (Ω) | | | | |
| 6 V _{DC} AT +85 °C; 4 V _{DC} AT +125 °C | | | | | | | | | | | | | |
| 220 | T1 | 20 | 0001 | 0089 | 0177 | 2.0 | 9.0 | 50 | 36 | -64 | +13 | +16 | 1000 |
| 220 | T1 | 10 | 0002 | 0090 | 0178 | 2.0 | 9.0 | 50 | 36 | -64 | +13 | +16 | 1000 |
| 820 | T2 | 20 | 0003 | 0091 | 0179 | 3.0 | 14.0 | 155 | 18 | -88 | +16 | +20 | 1500 |
| 820 | T2 | 10 | 0004 | 0092 | 0180 | 3.0 | 14.0 | 155 | 18 | -88 | +16 | +20 | 1500 |
| 1500 | T3 | 20 | 0005 | 0093 | 0181 | 5.0 | 20.0 | 172 | 18 | -90 | +20 | +25 | 1900 |
| 1500 | T3 | 10 | 0006 | 0094 | 0182 | 5.0 | 20.0 | 172 | 18 | -90 | +20 | +25 | 1900 |
| 2200 | T4 | 20 | 0007 | 0095 | 0183 | 6.0 | 24.0 | 170 | 13 | -90 | +25 | +30 | 2300 |
| 2200 | T4 | 10 | 0008 | 0096 | 0184 | 6.0 | 24.0 | 170 | 13 | -90 | +25 | +30 | 2300 |
| 8 V _{DC} AT +85 °C; 5 V _{DC} AT +125 °C | | | | | | | | | | | | | |
| 180 | T1 | 20 | 0009 | 0097 | 0185 | 2.0 | 9.0 | 41 | 45 | -60 | +13 | +16 | 1000 |
| 180 | T1 | 10 | 0010 | 0098 | 0186 | 2.0 | 9.0 | 41 | 45 | -60 | +13 | +16 | 1000 |
| 680 | T2 | 20 | 0011 | 0099 | 0187 | 3.0 | 14.0 | 130 | 22 | -83 | +16 | +20 | 1500 |
| 680 | T2 | 10 | 0012 | 0100 | 0188 | 3.0 | 14.0 | 130 | 22 | -83 | +16 | +20 | 1500 |
| 1500 | T3 | 20 | 0013 | 0101 | 0189 | 5.0 | 20.0 | 170 | 18 | -90 | +20 | +25 | 1900 |
| 1500 | T3 | 10 | 0014 | 0102 | 0190 | 5.0 | 20.0 | 170 | 18 | -90 | +20 | +25 | 1900 |
| 1800 | T4 | 20 | 0015 | 0103 | 0191 | 7.0 | 25.0 | 138 | 14 | -90 | +25 | +30 | 2300 |
| 1800 | T4 | 10 | 0016 | 0104 | 0192 | 7.0 | 25.0 | 138 | 14 | -90 | +25 | +30 | 2300 |

Notes

- (1) Dash number will include the letter "H" to indicate the optional vibration and shock requirements (i.e., 53.79 g's random vibration, 80 g's sinusoidal vibration and 500 g's shock)
- (2) For ripple current limits at various temperatures, voltages and frequencies, see Ripple Current table



| STANDARD RATINGS / EXTENDED RATINGS: CLR81, M39006/25-XXXX | | | | | | | | | | | | | |
|--|--------------|----------------------------|--|------|------|---------------------------|---------|------------------|--------------------|-----------------------------------|--------|---------|---|
| CAPACITANCE (μ F) | CASE CODE | CAP. TOL. (\pm %) | PART NO. M39006/25- ⁽¹⁾ FAILURE RATE LEVEL (%/1000 h) | | | MAX. DCL (μ A) AT | | MAX. DF AT | MAX. IMP. AT | MAX. CAPACITANCE CHANGE (%) AT | | | MAX. ⁽²⁾ RIPPLE CURRENT AT +85 °C |
| | | | M | P | R | +25 °C | +85 °C | +25 °C | -55 °C | -55 °C | +85 °C | +125 °C | 40 kHz |
| | | | 1.0 | 0.1 | 0.01 | | +125 °C | (%) | (Ω) | | | | (mA) |
| 10 V_{DC} AT +85 °C; 7 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 150 | T1 | 20 | 0017 | 0105 | 0193 | 2.0 | 9.0 | 34 | 54 | -55 | +13 | +16 | 900 |
| 150 | T1 | 10 | 0018 | 0106 | 0194 | 2.0 | 9.0 | 34 | 54 | -55 | +13 | +16 | 900 |
| 560 | T2 | 20 | 0019 | 0107 | 0195 | 3.0 | 16.0 | 106 | 27 | -77 | +16 | +20 | 1450 |
| 560 | T2 | 10 | 0020 | 0108 | 0196 | 3.0 | 16.0 | 106 | 27 | -77 | +16 | +20 | 1450 |
| 1200 | T3 | 20 | 0021 | 0109 | 0197 | 5.0 | 20.0 | 137 | 18 | -88 | +20 | +25 | 1850 |
| 1200 | T3 | 10 | 0022 | 0110 | 0198 | 5.0 | 20.0 | 137 | 18 | -88 | +20 | +25 | 1850 |
| 1500 | T4 | 20 | 0023 | 0111 | 0199 | 7.0 | 25.0 | 114 | 15 | -88 | +25 | +30 | 2300 |
| 1500 | T4 | 10 | 0024 | 0112 | 0200 | 7.0 | 25.0 | 114 | 15 | -88 | +25 | +30 | 2300 |
| 15 V_{DC} AT +85 °C; 10 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 100 | T1 | 20 | 0025 | 0113 | 0201 | 2.0 | 9.0 | 30 | 72 | -44 | +13 | +16 | 900 |
| 100 | T1 | 10 | 0026 | 0114 | 0202 | 2.0 | 9.0 | 30 | 72 | -44 | +13 | +16 | 900 |
| 390 | T2 | 20 | 0027 | 0115 | 0203 | 3.0 | 16.0 | 74 | 31 | -66 | +16 | +20 | 1450 |
| 390 | T2 | 10 | 0028 | 0116 | 0204 | 3.0 | 16.0 | 74 | 31 | -66 | +16 | +20 | 1450 |
| 820 | T3 | 20 | 0029 | 0117 | 0205 | 6.0 | 24.0 | 111 | 22 | -77 | +20 | +25 | 1800 |
| 820 | T3 | 10 | 0030 | 0118 | 0206 | 6.0 | 24.0 | 111 | 22 | -77 | +20 | +25 | 1800 |
| 1000 | T4 | 20 | 0031 | 0119 | 0207 | 8.0 | 32.0 | 92 | 17 | -77 | +25 | +30 | 2300 |
| 1000 | T4 | 10 | 0032 | 0120 | 0208 | 8.0 | 32.0 | 92 | 17 | -77 | +25 | +30 | 2300 |
| 25 V_{DC} AT +85 °C; 15 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 68 | T1 | 20 | 0033 | 0121 | 0209 | 2.0 | 9.0 | 22 | 90 | -40 | +12 | +15 | 850 |
| 68 | T1 | 10 | 0034 | 0122 | 0210 | 2.0 | 9.0 | 22 | 90 | -40 | +12 | +15 | 850 |
| 270 | T2 | 20 | 0035 | 0123 | 0211 | 3.0 | 16.0 | 55 | 33 | -62 | +13 | +16 | 1400 |
| 270 | T2 | 10 | 0036 | 0124 | 0212 | 3.0 | 16.0 | 55 | 33 | -62 | +13 | +16 | 1400 |
| 560 | T3 | 20 | 0037 | 0125 | 0213 | 7.0 | 28.0 | 76 | 24 | -72 | +20 | +25 | 1750 |
| 560 | T3 | 10 | 0038 | 0126 | 0214 | 7.0 | 28.0 | 76 | 24 | -72 | +20 | +25 | 1750 |
| 680 | T4 | 20 | 0039 | 0127 | 0215 | 8.0 | 32.0 | 63 | 19 | -72 | +25 | +30 | 2100 |
| 680 | T4 | 10 | 0040 | 0128 | 0216 | 8.0 | 32.0 | 63 | 19 | -72 | +25 | +30 | 2100 |
| 30 V_{DC} AT +85 °C; 20 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 56 | T1 | 20 | 0041 | 0129 | 0217 | 2.0 | 9.0 | 22 | 100 | -38 | +12 | +15 | 800 |
| 56 | T1 | 10 | 0042 | 0130 | 0218 | 2.0 | 9.0 | 22 | 100 | -38 | +12 | +15 | 800 |
| 220 | T2 | 20 | 0043 | 0131 | 0219 | 3.0 | 16.0 | 42 | 36 | -60 | +13 | +16 | 1200 |
| 220 | T2 | 10 | 0044 | 0132 | 0220 | 3.0 | 16.0 | 42 | 36 | -60 | +13 | +16 | 1200 |
| 470 | T3 | 20 | 0045 | 0133 | 0221 | 8.0 | 32.0 | 64 | 25 | -65 | +20 | +25 | 1500 |
| 470 | T3 | 10 | 0046 | 0134 | 0222 | 8.0 | 32.0 | 64 | 25 | -65 | +20 | +25 | 1500 |
| 560 | T4 | 20 | 0047 | 0135 | 0223 | 9.0 | 36.0 | 55 | 20 | -65 | +25 | +30 | 2000 |
| 560 | T4 | 10 | 0048 | 0136 | 0224 | 9.0 | 36.0 | 55 | 20 | -65 | +25 | +30 | 2000 |
| 50 V_{DC} AT +85 °C; 30 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 33 | T1 | 20 | 0049 | 0137 | 0225 | 2.0 | 9.0 | 12.3 | 135 | -29 | +10 | +12 | 700 |
| 33 | T1 | 10 | 0050 | 0138 | 0226 | 2.0 | 9.0 | 12.3 | 135 | -29 | +10 | +12 | 700 |
| 120 | T2 | 20 | 0051 | 0139 | 0227 | 4.0 | 24.0 | 22.5 | 49 | -42 | +12 | +15 | 1200 |
| 120 | T2 | 10 | 0052 | 0140 | 0228 | 4.0 | 24.0 | 22.5 | 49 | -42 | +12 | +15 | 1200 |
| 270 | T3 | 20 | 0053 | 0141 | 0229 | 8.0 | 32.0 | 37 | 29 | -46 | +20 | +25 | 1450 |
| 270 | T3 | 10 | 0054 | 0142 | 0230 | 8.0 | 32.0 | 37 | 29 | -46 | +20 | +25 | 1450 |
| 330 | T4 | 20 | 0055 | 0143 | 0231 | 9.0 | 36.0 | 38 | 22 | -46 | +25 | +30 | 1900 |
| 330 | T4 | 10 | 0056 | 0144 | 0232 | 9.0 | 36.0 | 38 | 22 | -46 | +25 | +30 | 1900 |
| 60 V_{DC} AT +85 °C; 40 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 27 | T1 | 20 | 0057 | 0145 | 0233 | 3.0 | 12.0 | 10.2 | 144 | -24 | +10 | +12 | 700 |
| 27 | T1 | 10 | 0058 | 0146 | 0234 | 3.0 | 12.0 | 10.2 | 144 | -24 | +10 | +12 | 700 |
| 100 | T2 | 20 | 0059 | 0147 | 0235 | 4.0 | 20.0 | 19 | 54 | -36 | +12 | +15 | 1100 |
| 100 | T2 | 10 | 0060 | 0148 | 0236 | 4.0 | 20.0 | 19 | 54 | -36 | +12 | +15 | 1100 |
| 220 | T3 | 20 | 0061 | 0149 | 0237 | 8.0 | 32.0 | 30 | 29 | -40 | +16 | +20 | 1400 |
| 220 | T3 | 10 | 0062 | 0150 | 0238 | 8.0 | 32.0 | 30 | 29 | -40 | +16 | +20 | 1400 |
| 270 | T4 | 20 | 0063 | 0151 | 0239 | 9.0 | 36.0 | 27 | 23 | -45 | +20 | +25 | 1850 |
| 270 | T4 | 10 | 0064 | 0152 | 0240 | 9.0 | 36.0 | 27 | 23 | -45 | +20 | +25 | 1850 |

Notes

- (1) Dash number will include the letter "H" to indicate the optional vibration and shock requirements (i.e., 53.79 g's random vibration, 80 g's sinusoidal vibration and 500 g's shock)
- (2) For ripple current limits at various temperatures, voltages and frequencies, see Ripple Current table



| STANDARD RATINGS / EXTENDED RATINGS: CLR81, M39006/25-XXXX | | | | | | | | | | | | | |
|---|--------------|----------------------------|--|------|------|---------------------------|---------|------------------|--------------------|-----------------------------------|--------|---------|---|
| CAPACITANCE (μ F) | CASE CODE | CAP. TOL. (\pm %) | PART NO. M39006/25- ⁽¹⁾ FAILURE RATE LEVEL (%/1000 h) | | | MAX. DCL (μ A) AT | | MAX. DF AT | MAX. IMP. AT | MAX. CAPACITANCE CHANGE (%) AT | | | MAX. ⁽²⁾ RIPPLE CURRENT AT +85 °C |
| | | | M | P | R | +25 °C | +85 °C | +25 °C | -55 °C | -55 °C | +85 °C | +125 °C | 40 kHz |
| | | | 1.0 | 0.1 | 0.01 | | +125 °C | (%) | (Ω) | | | | |
| 75 V_{DC} AT +85 °C; 50 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 22 | T1 | 20 | 0065 | 0153 | 0241 | 3.0 | 12.0 | 8.5 | 157 | -19 | +10 | +12 | 600 |
| 22 | T1 | 10 | 0066 | 0154 | 0242 | 3.0 | 12.0 | 8.5 | 157 | -19 | +10 | +12 | 600 |
| 82 | T2 | 20 | 0067 | 0155 | 0243 | 4.0 | 24.0 | 15.2 | 63 | -30 | +12 | +15 | 1000 |
| 82 | T2 | 10 | 0068 | 0156 | 0244 | 4.0 | 24.0 | 15.2 | 63 | -30 | +12 | +15 | 1000 |
| 180 | T3 | 20 | 0069 | 0157 | 0245 | 9.0 | 36.0 | 24.4 | 30 | -35 | +16 | +20 | 1300 |
| 180 | T3 | 10 | 0070 | 0158 | 0246 | 9.0 | 36.0 | 24.4 | 30 | -35 | +16 | +20 | 1300 |
| 220 | T4 | 20 | 0071 | 0159 | 0247 | 10.0 | 40.0 | 37.0 | 24 | -40 | +20 | +25 | 1800 |
| 220 | T4 | 10 | 0072 | 0160 | 0248 | 10.0 | 40.0 | 37.0 | 24 | -40 | +20 | +25 | 1800 |
| 100 V_{DC} AT +85 °C; 65 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 10 | T1 | 20 | 0073 | 0161 | 0249 | 3.0 | 12.0 | 4.5 | 200 | -17 | +10 | +12 | 800 |
| 10 | T1 | 10 | 0074 | 0162 | 0250 | 3.0 | 12.0 | 4.5 | 200 | -17 | +10 | +12 | 800 |
| 39 | T2 | 20 | 0075 | 0163 | 0251 | 5.0 | 24.0 | 10.4 | 80 | -20 | +12 | +15 | 1300 |
| 39 | T2 | 10 | 0076 | 0164 | 0252 | 5.0 | 24.0 | 10.4 | 80 | -20 | +12 | +15 | 1300 |
| 68 | T3 | 20 | 0077 | 0165 | 0253 | 10.0 | 40.0 | 11.3 | 40 | -30 | +14 | +16 | 1600 |
| 68 | T3 | 10 | 0078 | 0166 | 0254 | 10.0 | 40.0 | 11.3 | 40 | -30 | +14 | +16 | 1600 |
| 120 | T4 | 20 | 0079 | 0167 | 0255 | 12.0 | 48.0 | 25 | 30 | -35 | +15 | +17 | 2000 |
| 120 | T4 | 10 | 0080 | 0168 | 0256 | 12.0 | 48.0 | 25 | 30 | -35 | +15 | +17 | 2000 |
| 125 V_{DC} AT +85 °C; 85 V_{DC} AT +125 °C | | | | | | | | | | | | | |
| 6.8 | T1 | 20 | 0081 | 0169 | 0257 | 3.0 | 12.0 | 6.0 | 300 | -14 | +10 | +12 | 700 |
| 6.8 | T1 | 10 | 0082 | 0170 | 0258 | 3.0 | 12.0 | 6.0 | 300 | -14 | +10 | +12 | 700 |
| 27 | T2 | 20 | 0083 | 0171 | 0259 | 5.0 | 24.0 | 7.2 | 90 | -18 | +12 | +15 | 1200 |
| 27 | T2 | 10 | 0084 | 0172 | 0260 | 5.0 | 24.0 | 7.2 | 90 | -18 | +12 | +15 | 1200 |
| 47 | T3 | 20 | 0085 | 0173 | 0261 | 10.0 | 40.0 | 7.9 | 50 | -26 | +14 | +16 | 1500 |
| 47 | T3 | 10 | 0086 | 0174 | 0262 | 10.0 | 40.0 | 7.9 | 50 | -26 | +14 | +16 | 1500 |
| 82 | T4 | 20 | 0087 | 0175 | 0263 | 12.0 | 48.0 | 17.4 | 32 | -30 | +15 | +17 | 1900 |
| 82 | T4 | 10 | 0088 | 0176 | 0264 | 12.0 | 48.0 | 17.4 | 32 | -30 | +15 | +17 | 1900 |

Notes

- (1) Dash number will include the letter "H" to indicate the optional vibration and shock requirements (i.e., 53.79 g's random vibration, 80 g's sinusoidal vibration and 500 g's shock)
- (2) For ripple current limits at various temperatures, voltages and frequencies, see Ripple Current table

| CLR79, CLR81 RIPPLE CURRENT MULTIPLIERS VS. FREQUENCY, TEMPERATURE AND APPLIED PEAK VOLTAGE | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|----------|---------|------|------|------|---------|------|------|------|---------|------|------|------|---------|------|------|------|---------|------|------|------|---------|------|------|------|
| FREQUENCY OF APPLIED RIPPLE CURRENT | | 120 Hz | | | | 800 Hz | | | | 1 kHz | | | | 10 kHz | | | | 40 kHz | | | | 100 kHz | | | |
| | | TEMP °C | | | | TEMP °C | | | | TEMP °C | | | | TEMP °C | | | | TEMP °C | | | | | | | |
| AMBIENT STILL AIR | | ≤ 55 | 85 | 105 | 125 | ≤ 55 | 85 | 105 | 125 | ≤ 55 | 85 | 105 | 125 | ≤ 55 | 85 | 105 | 125 | ≤ 55 | 85 | 105 | 125 | | | | |
| % OF APPLIED VOLTAGE | 100 % | 0.60 | 0.39 | - | - | 0.71 | 0.43 | - | - | 0.72 | 0.46 | - | - | 0.88 | 0.55 | - | - | 1.0 | 0.63 | - | - | 1.1 | 0.69 | - | - |
| | 90 % | 0.60 | 0.46 | - | - | 0.71 | 0.55 | - | - | 0.72 | 0.55 | - | - | 0.88 | 0.67 | - | - | 1.0 | 0.77 | - | - | 1.1 | 0.85 | - | - |
| | 80 % | 0.60 | 0.52 | 0.35 | - | 0.71 | 0.62 | 0.42 | - | 0.72 | 0.62 | 0.42 | - | 0.88 | 0.76 | 0.52 | - | 1.0 | 0.87 | 0.59 | - | 1.1 | 0.96 | 0.65 | - |
| | 70 % | 0.60 | 0.58 | 0.44 | - | 0.71 | 0.69 | 0.52 | - | 0.72 | 0.70 | 0.52 | - | 0.88 | 0.85 | 0.64 | - | 1.0 | 0.97 | 0.73 | - | 1.1 | 1.07 | 0.80 | - |
| | 66 2/3 % | 0.60 | 0.60 | 0.46 | 0.27 | 0.71 | 0.71 | 0.55 | 0.32 | 0.72 | 0.72 | 0.55 | 0.32 | 0.88 | 0.88 | 0.68 | 0.40 | 1.0 | 1.0 | 0.77 | 0.45 | 1.1 | 1.1 | 0.85 | 0.50 |

Notes

- 1. At +125 °C the rated voltage of the capacitors decreases to 66 2/3 % of the +85 °C rated voltage
- 2. The peak of the applied AC ripple voltage plus the applied DC voltage must not exceed the DC voltage rating of the capacitor either forward or reverse
- 3. The ripple current listed represents a rating calculated using a maximum internal temperature rise (Δ T) of +50 °C at 40 kHz at +85 °C ambient with a maximum peak rated voltage of 66 2/3 % of the +85 °C peak voltage rating
- 4. The maximum allowable internal temperature rise (Δ T) decreases linearly to a calculated +10 °C rise at +125 °C ambient
- 5. The internal temperature rise is directly proportional to the equivalent series resistance of the capacitor and equivalent series resistance increases with decreasing frequency



Wet Tantalum Capacitors Military Styles CLR79, CLR81, CLR90, and CLR91

| ELECTRICAL PERFORMANCE CHARACTERISTICS | | | |
|--|---|--------------------------------------|-----------------------------------|
| ITEM | PERFORMANCE CHARACTERISTICS | | |
| Operating temperature range | -55 °C to +85 °C (to +125 °C with voltage derating) | | |
| Capacitance tolerance | ± 20 %, ± 10 %, at 120 Hz, at +25 °C | | |
| Capacitance change by temperature | Limit per Standard Ratings table | | |
| ESR | For CLR90 and CLR91: limit per Standard Ratings table, at +25 °C, 120 Hz For CLR79 and CLR81: refer to M39006/22 | | |
| Impedance | Limit per Standard Ratings table, at -55 °C, 120 Hz | | |
| DCL (leakage current) | Limit per Standard Ratings table | | |
| AC ripple current | Limit per Standard Ratings table, at +85 °C and 40 kHz | | |
| Reverse voltage | Reverse voltage rating at +85 °C is 3 V _{DC} and at +125 °C is 2 V _{DC} | | |
| Maximum operating voltage | Rated (+85 °C) V _{DC} | Derated (+125 °C) V _{DC} | Surge (+85 °C) V _{DC} |
| | 6 | 4 | 6.9 |
| | 8 | 5 | 9.2 |
| | 10 | 7 | 11.5 |
| | 15 | 10 | 17.2 |
| | 25 | 15 | 28.8 |
| | 30 | 20 | 34.5 |
| | 50 | 30 | 57.5 |
| | 60 | 40 | 69.0 |
| | 75 | 50 | 86.2 |
| | 100 | 65 | 115.0 |
| 125 | 85 | 144.0 | |
| Surge voltage | The DC surge voltage is the maximum voltage to which the capacitor can be subjected under any conditions including transients and peak ripple at the highest line voltage. The DC surge voltage is 115 % of rated DC voltage | | |

| PERFORMANCE CHARACTERISTICS | | |
|-----------------------------|---|---|
| ITEM | CONDITION | POST TEST PERFORMANCE |
| Surge voltage | 85 °C 1000 successive test cycles at the applicable DC surge voltage specified in series with a 1 kΩ resistor at the rate of 30 s ON, 5.5 min OFF | The capacitors shall meet the requirements of MIL-PRF-39006: DC leakage Not to exceed the specified value Capacitance change Within ± 5 % of initial measurement Dissipation factor Not to exceed the specified value There shall be no evidence of mechanical damage or leakage of electrolyte |
| Life testing | Method 108 of MIL-STD-202. Capacitors shall be capable of withstanding a 10 000 h life test at a temperature +85 °C at rated voltage | The capacitors shall meet the requirements of MIL-PRF-39006: DC leakage at 85 °C and 125 °C Not to exceed 125 % of the specified value DC leakage at 25 °C Not to exceed the specified value Capacitance change Within +10 %, -20 % of initial measurement Dissipation factor Not to exceed 200 % of the specified value Dielectric withstanding voltage 2000 V _{DC} , min. Insulation resistance 100 MΩ, min. |
| AC ripple life | As specified in MIL-PRF-39006: 2000 h, +85 °C | The capacitors shall meet the requirements of MIL-PRF-39006: DC leakage Not to exceed the specified value Capacitance change Within ± 10 % of initial measurement Dissipation factor Not to exceed the specified value There shall be no damage, obliteration of marking, or leakage of electrolyte |



| ENVIRONMENTAL CHARACTERISTICS | | |
|--|--|---|
| ITEM | CONDITION | POST TEST PERFORMANCE |
| Stability at low and high temperatures | As specified in MIL-PRF-39006 | The capacitors shall meet the requirements of MIL-PRF-39006 |
| Moisture resistance | Method 106 of MIL-STD-202 | The capacitors shall meet the requirements of MIL-PRF-39006: DC leakage Not to exceed 125 % of +25 °C specified value Capacitance change Within ± 8 % of initial measurement Dissipation factor Not to exceed 115 % of the specified value |
| Thermal shock | Method 107 of MIL-STD-202, condition A (with step 3 at +125 °C) Number of cycles: 300 cycles for qualification and group C, subgroup 7; 30 cycles for group B and group C, subgroup 8 | The capacitors shall meet the requirements of MIL-PRF-39006: DC leakage Not to exceed 200 % of +25 °C specified value for qualification and group C DC leakage Not to exceed 125 % of +25 °C specified value for group B Capacitance change Within ± 5 % of initial measurement Dissipation factor Not to exceed 115 % of the specified value |
| Salt atmosphere (corrosion) | Method 101 of MIL-STD-202, condition B (48 h) | There shall be no harmful corrosion, and the finish shall protect at least 90 % of any exposed metal surface of the capacitor. There shall be no unwrapping of, or mechanical damage to, the insulating sleeving, when applicable. Marking shall remain legible |
| Low temperature storage | Method 502 of MIL-STD-810, Storage temperature: -62 °C +0 °C, -3 °C. Exposure time: 72 h followed by a 1 h exposure at +125 °C, +7 °C, -0 °C within 24 h after low temperature storage | The capacitors shall meet the requirements of MIL-PRF-39006: DC leakage Not to exceed the specified value Capacitance change Within ± 5 % of initial measurement Dissipation factor Not to exceed the specified value There shall be no evidence of leakage of electrolyte |
| Seal | Method 112 of MIL-STD-202, conditions A or D, and C | When the capacitors are tested as specified in MIL-PRF-39006, there shall be no evidence of leakage. |
| Barometric pressure (reduced) | Method 105 of MIL-STD-202, condition E (150 000 ft) (45 720.1 m) | There shall be no flashover, breakdown, or harmful deformation of the case, and mechanical damage, obliteration of marking, or leakage of electrolyte. |

| MECHANICAL PERFORMANCE CHARACTERISTICS | | |
|--|--|---|
| ITEM | CONDITION | POST TEST PERFORMANCE |
| Shock (specified pulse) | Method 213 of MIL-STD-202, condition I (100 g's) or condition D (500 g's) for "H" designated units | The capacitors shall meet the requirements of MIL-PRF-39006 |
| Vibration, high frequency | Method 204 of MIL-STD-202, condition D (20 g's) or condition H (80 g's) for "H" designated units | The capacitors shall meet the requirements of MIL-PRF-39006 |
| Random vibration ("H" designated units only) | Method 214 of MIL-STD-202, condition II-K (53.79 g's). | The capacitors shall meet the requirements of MIL-PRF-39006: DC leakage Not to exceed 125 % of the specified value Capacitance change Within ± 5 % of initial measurement Dissipation factor Not to exceed 115 % of the specified value There shall be no evidence of harmful corrosion, mechanical damage, obliteration of marking, or leakage of electrolyte. |
| Solderability | Method 208 of MIL-STD-202 | The capacitors shall meet the requirements of MIL-PRF-39006 |
| Terminal strength | Pull test: method 211 of MIL-STD-202, condition A. Wire-lead bend: in accordance with MIL-PRF-39006 | There shall be no loosening of or permanent damage to the terminals, terminal weld or solder, or seal. |
| Dielectric withstanding voltage | Method 301 of MIL-STD-202, 2000 V _{DC} min. | The capacitors shall meet the requirements of MIL-PRF-39006 |
| Insulation resistance | Method 302 of MIL-STD-202, condition B (500 V _{DC} ± 10 %) | The insulation resistance shall be not less than 100 MΩ |
| Resistance to solvent | Method 215 of MIL-STD-202 | There shall be no mechanical or visual damage to capacitors post-conditioning. Marking shall remain legible, no degradation of the can material. |
| Resistance to soldering heat | Method 210 of MIL-STD-202, condition C | The capacitors shall meet the requirements of MIL-PRF-39006: DC leakage Not to exceed the specified value Capacitance change Within ± 5 % of initial measurement Dissipation factor Not to exceed the specified value There shall be no evidence of mechanical damage |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.