



Features:


- Constant Voltage Design
- Universal AC input/ Full Range
- Built-in Active PFC function, PF 0.95 Typical
- High Efficiency (Up to 87%)
- Output Protections: OLP/OVP/SCP/OTP
- Lightning Protection
- Class 2 Power Unit (See Note)
- Waterproof (IP67)
- 5 Year Warranty




Model	PLV-050S036	PLV-050S048
Output Characteristics		
DC Output	36V	48V
Rated Current <small>See Note</small>	1.39A ⁽³⁾	1.04A ⁽²⁾
Current Range	0~1.39A	0~1.04A
Ripple and Noise (max) <small>Note 1</small>	±10% Vo	
Voltage Accuracy	±5% Vo	
Line Regulation	±1% Vo	
Load Regulation	±3% Vo	
Rise Time	20mS Max @ Rated Load	
Hold-up Time (Typ.)	8.5mS Min (110VAC input, full load), 10mS Min (220VAC input, full load)	
Input Characteristics		
Voltage Range	90VAC~305VAC	
Frequency Range	47Hz-63Hz	
Power Factor (Typical)	110VAC	>0.95
	220VAC	>0.92
Efficiency (Typical)	86%	87%
AC Current (max)	0.8A @ 100-277VAC Input Full Load	
Inrush Current (max)	65A @ 230VAC, 25°C	
Leakage Current	0.50mA max @ 277VAC	
Protection		
Over Temperature (OTP)	110°C (Temperature of internal components); shut down, auto recover after the temperature decreases	
Over Voltage (OVP) <small>Note 2</small>	1.2~1.4Vo	
Short Circuit (SCP)	Long-term mode, auto recovery	
Environmental Characteristics		
Operating Temperature	-35°C~70°C	
Operating Relative Humidity	10% RH to 100% RH	
Storage Temperature	-40°C~85°C, 5% to 100% RH non-condensing	
Vibration	10 to 300Hz sweep at constant acceleration of 1.0G(Breadth: 3.5mm) for 1 Hour for each of the perpendicular axes X, Y, Z	
Waterproof Rating	IP67	
Safety Standards	UL8750, Compliance to UL1012 UL935, IEC61347	
Withstand Voltage	L/N-GND: 4kV, L-N: 2kV	
Isolation Resistance	I/P-O/P: >100M Ohms / 500VDC / 25°C / 70% RH	
EMC Emission	Compliance to EN55022(CISPR22) Class B, EN61000-3-2 Class A, EN61000-3-3	
EMC Immunity	Compliance to EN61000-3-2, 3 EN61000-4-2, 3, 4, 5, 6, 8, 11, EN61547	
Characteristics		
Life Time	More than 50,000Hrs (25°C, 80% Load)	
MTBF (MIL-HDBK-217F)	More than 550,000Hrs (25°C, 80% Load)	
Dimension (LxWxH)	199x42.5x34mm	
Note	1. Ripple & Noise: Measured by 20 MHz bandwidth oscilloscope and the output paralleled with a 0.1 uF ceramic capacitor and a 10 uF electrolytic capacitor. 2. Latch Mode: The power supply shall return to normal operation only after the power is turned on again (1) Non-Class 2 output (USR & CNR) (2) Class 2 output (USR); Non-Class 2 output (CNR) (3) Class 2 output (USR & CNR)	

MECHANICAL SPECIFICATIONS

UNIT: mm

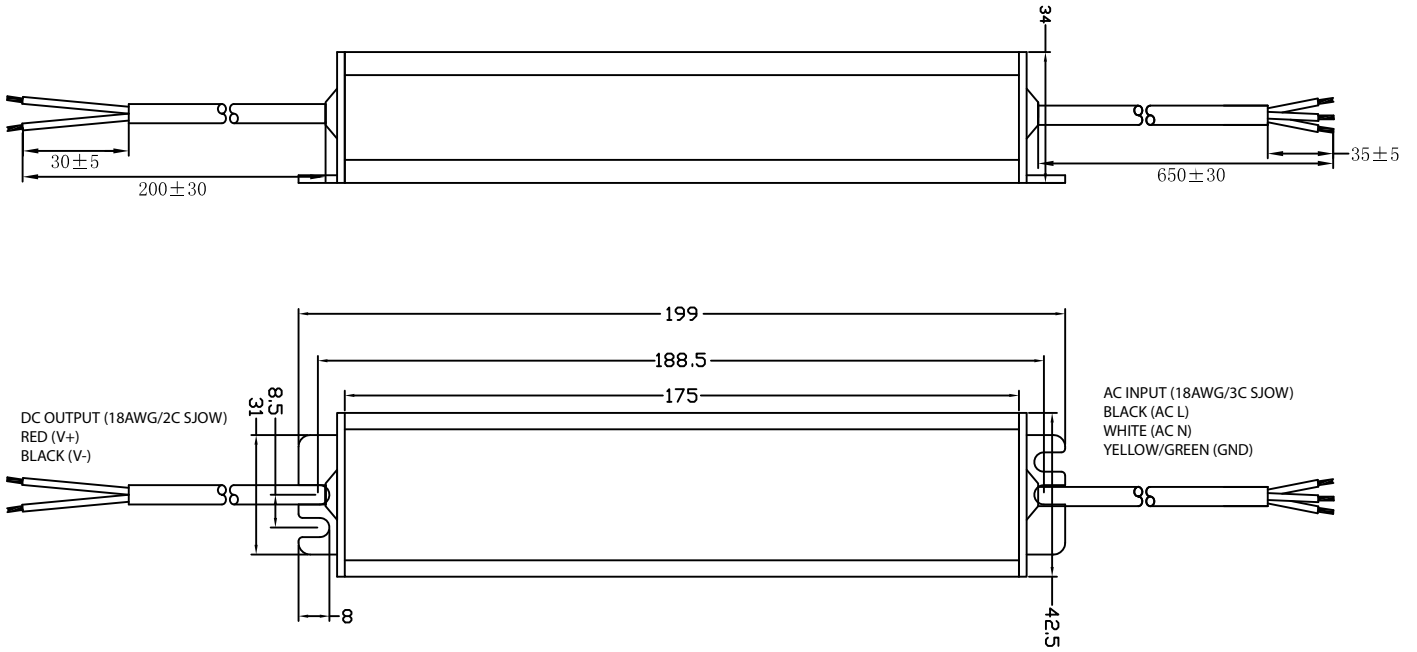

Derating Curve

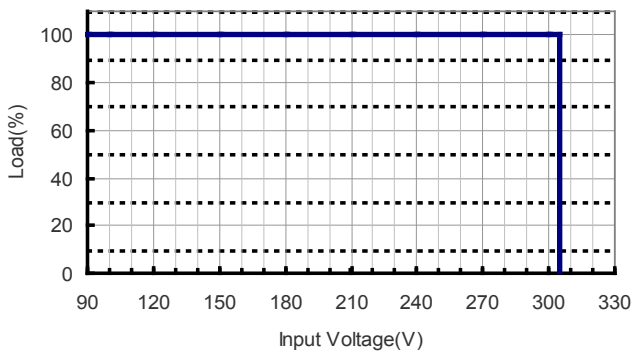

Ambient Temperature vs. Load

