
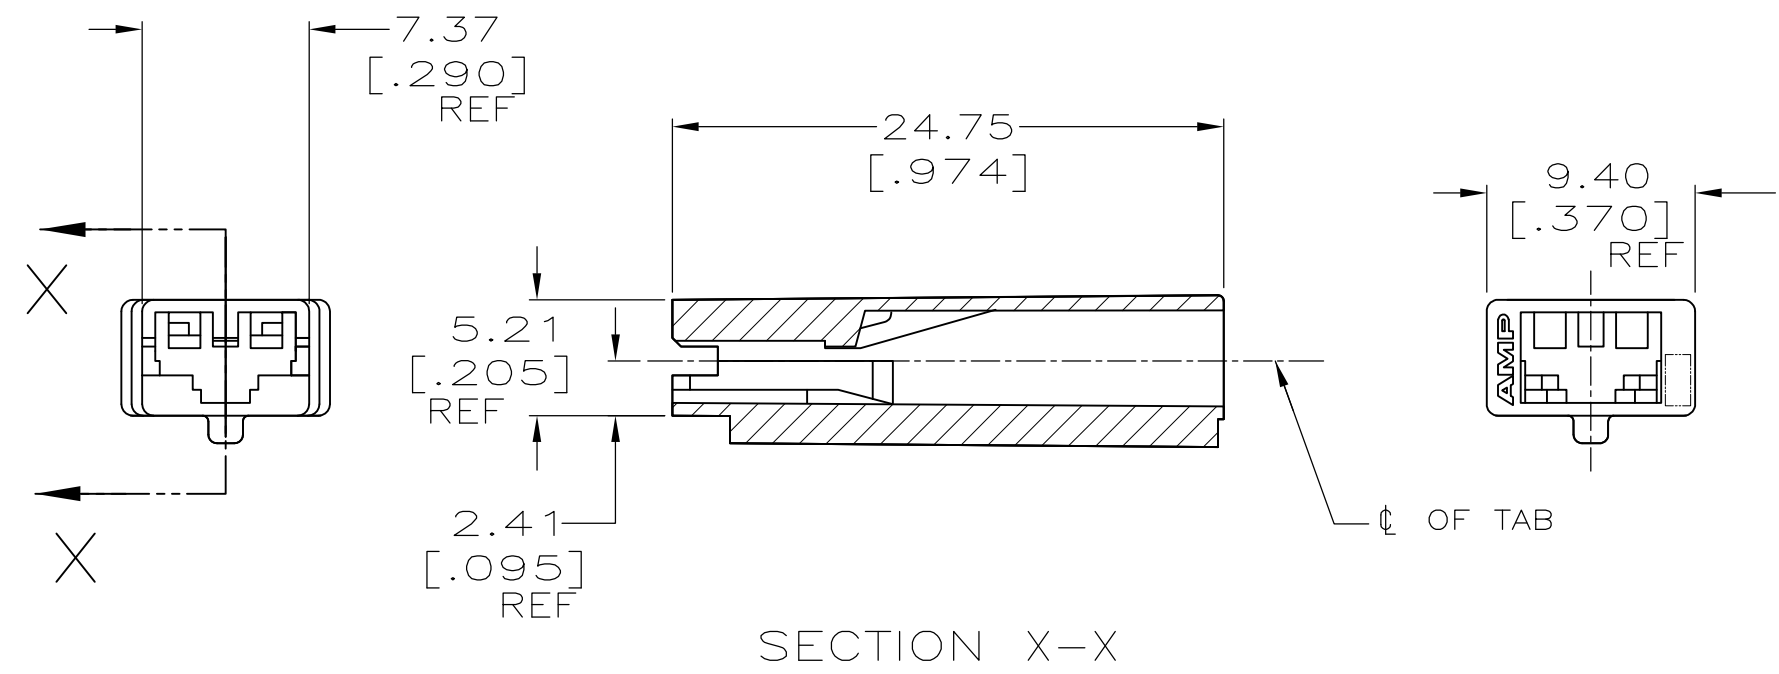


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	E	REVISED PER ECO-13-014735	19SEP2013	KH MD

SUGGESTED MATING TAB

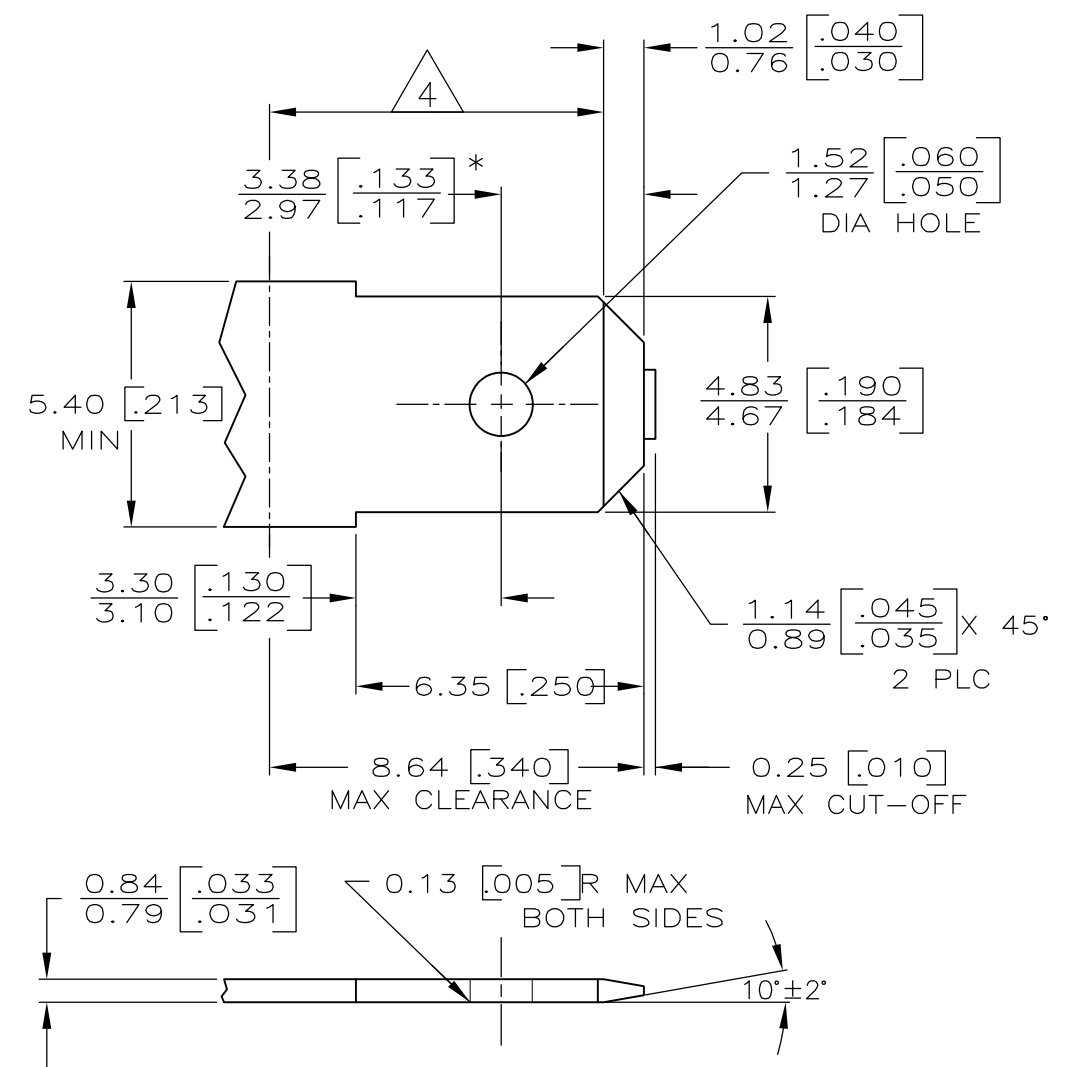

- 1 ACCEPTS CONTACTS FOR 0.81 [.032] THICK TABS ONLY. EXAMPLE, 63498, 173690.
- △ 2 PRELIMINARY - NOT FOR PRODUCTION

- 1 MATL: #2 HARD BRASS OR NICKEL PLATED STEEL.
- 2 NO BURRS PERMISSIBLE AT HOLE.
- 3 TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMPERATURE IS OVER 225° F
- △ 4 MUST BE FLAT WITHIN 0.076 [.003] OVER THIS LENGTH.
- 5 HOLE MUST BE SYMMETRICAL ABOUT TAB ϕ WITHIN 0.076 [.003].
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

66 NYLON, V0	521125-3
STANYL TW341	△ 2 521125-2
6/6 NYLON	521125-1
MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	11/15/96	STE TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK	MS FEHER	11/15/96			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J GILLESPIE	11/15/96	NAME		
0 PLC	± -	PRODUCT SPEC			HOUSING, POSITIVE-LOCK, 4.75 [.187] SERIES, MK II		
1 PLC	± -	APPLICATION SPEC			SIZE		
2 PLC	± 0.25 [.010]	WEIGHT			CAGE CODE		
3 PLC	± -	CUSTOMER DRAWING			DRAWING NO		
4 PLC	± -	SCALE			RESTRICTED TO		
ANGLES	± -	3:1			SHEET		
MATERIAL	SEE TABLE	FINISH			1 OF 1		
	NATURAL	REV			E		