

## SUMMARY



Image is for illustrative purpose only

### # Wires

Coax 1

Series 00  
Termination type Female solder  
IP rating 68 when mated  
AWG wire size 0.00 - 0.00  
Cable Ø 0.00 - 0.00 mm  
Status active

### Download

[Request a quote](#)  
[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model HGP\*: Fixed receptacle, nut fixing, watertight  
Keying Circular, female  
Housing Material Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces  
Variant P : Watertight unmated  
Weight 3.62 g

### Performance

Configuration 00.250 : 1 Coax (50 Ohm)  
Insulator T: PTFE  
Rated Current 4 Amps

### Specifications

Contact Type: Coaxial 50 Ohm (Solder)  
Contact Dia.: 0.7 mm (0.028in)  
Bucket Dia.: 0.6 mm (0.024in)  
Test voltage: 2.1 kV (rms)  
R (max): 6.1 mOhm  
Vtest: 2100 V (AC), 3000 V (DC)


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

□  
Impedance: 50 Ohm  
VSWR:  $1.09 + 0.11 * f/\text{GHz}$

## Others

Endurance (Shell): 5000 mating cycles  
Temp (min / max): -20°C / +100°C  
F ret (min): 100 N  
Salt Spray Corrosion: >1000 hr  
Pressure: 60 bars

## DRAWINGS

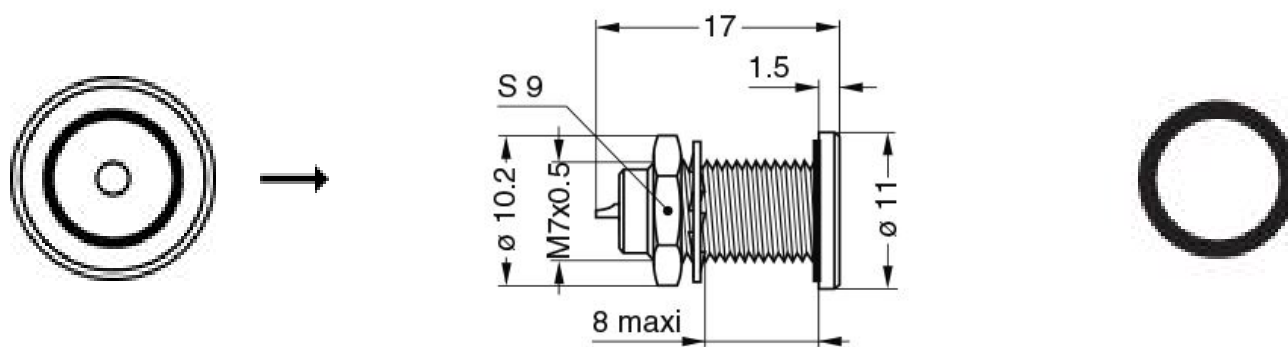

## Dimensions








|     | A    | B    | L    | S3   | e      |
|-----|------|------|------|------|--------|
| mm. | 11   | 10.2 | 17   | 9    | M7x0.5 |
| in. | 0,43 | 0,40 | 0,67 | 0,35 |        |

## RECOMMENDED BY LEMO

## Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Cables

|                     |           |       |  |
|---------------------|-----------|-------|--|
| 159580              | PVC       | Black |  |
| 17420               | PVC       | Black |    |
| 17450               | COPOLYMER | Black |    |
| 178190              | PTFE      | Brown |  |
| 18000               | PTFE      | Brown |    |
| 18700               | PTFE      | White |    |
| 18800               | PTFE      | White |  |
| 196270              | PTFE      | White |  |
| 31600               | PTFE      | Brown |  |
| 62000               | PVC       | Black |  |
| CCX.50.030.083.180B |           | White |  |
| CCX.50.RG0.58AU14B  | FEP       | White |  |
| CCX.50.RG1.74-U25N  | PVC       | Black |  |
| CCX.50.RG1.74AU28N  | PVC       | Black |  |
| CCX.50.RG1.74AU28N  | PVC       | Black |    |
| CCX.50.RG1.74U25N   | PVC       | Black |  |
| CCX.50.RG1.78BU18M  | FEP       | Brown |  |
| CCX.50.RG1.78BU18M  | PTFE      | Brown |  |
| CCX.50.RG1.88AU24B  | TFE       | White |  |
| CCX.50.RG1.88AU26B  | PFA       | White |  |
| CCX.50.RG1.88AU26B  | PTFE      | White |  |
| CCX.50.RG1.96AU19B  | PTFE      | White |  |
| CCX.50.RG1.96AU20B  | PFA       | White |  |
| CCX.50.RG3.16BU26M  | FEP       | Brown |  |
| CCX.50.RG3.16U28M   | PTFE      | Brown |  |
| CCX.75.040.195327G  | PVC       | Grey  |  |
| CCX.75.RG0.59BU62N  | PVC       | Black |  |
| CCX.75.RG1.79BU26M  | FEP       | Brown |  |
| CCX.75.RG1.87AU26B  | PFA       | White |  |
| CCX.75.RG1.87AU27B  | PTFE      | White |  |
| CCX.93.RG0.62AU62N  | PVC       | Black |  |
| CCX.95.RG1.80BU36M  | PTFE      | Brown |  |
| CCX.95.RG1.95AU37B  | PFA       | White |  |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.