


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00132	Connector, mono plug 2.5xL17.5 mm, brass nickel plated	1	
2	30-00005	Wire, 2C BC, 24 AWG, 300V, 80C, 3.7 mm, shielded, PVC, 76A	1	
3	24-00044	Overmold, PVC, black	1	
4	Heat Shrink	Heat shrink tube, Ø2.0, 30±2 mm, 105°C, black	1	

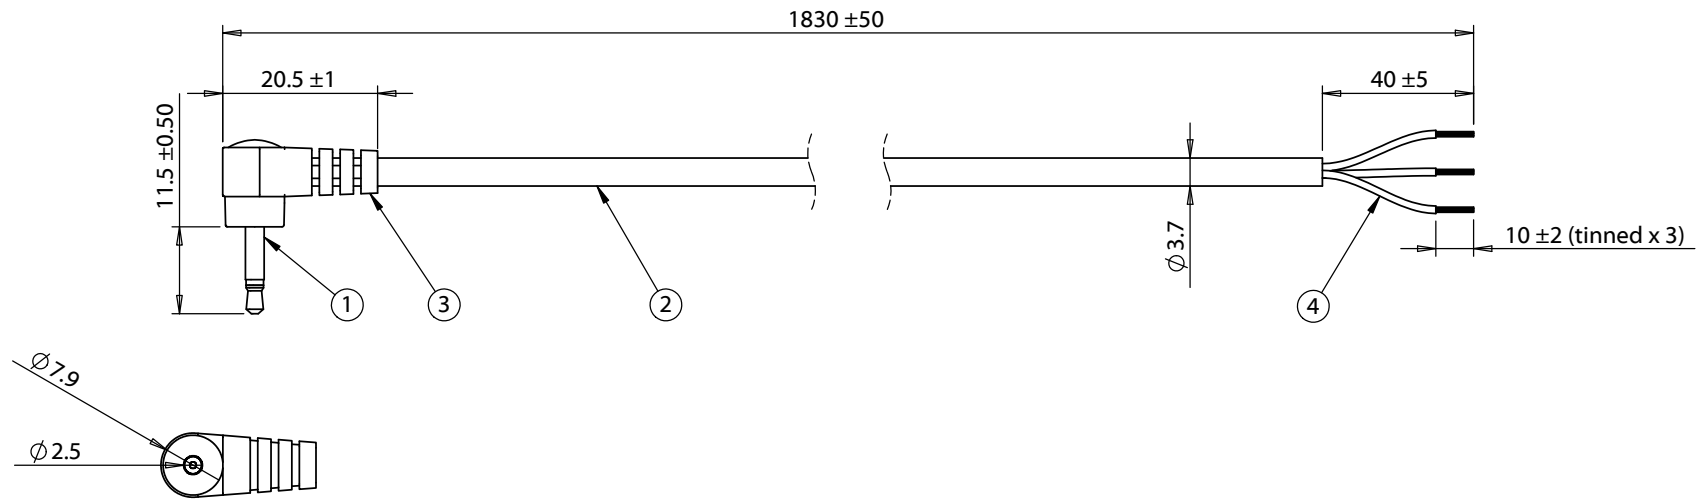

Wiring diagram	
50-00132	Wire Color
Tip	Red
Ring	Black
N.C.	Shield

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	1/19/2009	Re-issued CUI spec as Tensility	GL Digitally signed by GL Date: 2017.02.13 09:09:07 -08'00'	RoHS compliant	
A1	8/31/2011	Updated description, connector, and wire information	Verified: PS Digitally signed by PS Date: 2017.02.13 14:52:15 -08'00'	Function test: no open, no short circuit, no intermittent	
A2	2/9/2012	Updated wiring diagram	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 2.5mm 90° 50-00132 mono plug to stripped tinned, 24 AWG, 30-00005 wire, shielded	
A3	2/13/2017	Updated notes			Size: A Part number: 053-0280R (CA-2202)
					Scale: 1:1 Sheet 1 of 1