

Ethernet-based, Modular Media Converter Chassis

MediaConverter/1

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com



PRODUCT FEATURES

- Supports Fast Ethernet and Gigabit Ethernet
- Supports “Mc” modules
- Table-top
- 1-slot chassis
- Internal AC power
- Modular, hot-swappable architecture reduces operational costs associated with product installation, upgrades and maintenance

The unmanaged B+B SmartWorx' MediaConverter/1 enables you to install compact, horizontal modules that support speeds of 10/100Mbps, 100Mbps or Gigabit. The one-slot chassis is one of four chassis that can provide a low-cost solution for segments in a network that require a copper to fiber conversion.

The module series available from B+B SmartWorx for this chassis are the McLIM, McLIM-TP-TX/FX and McGigabit.

The one-slot chassis has a reliable internal AC power supply. A country-specific power cord is shipped with each chassis

ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION
MediaConverter/1	
851-10901	1 Slot, AC Chassis


ACCESSORIES

895-39949 - Rackmount Shelf

All product specifications are subject to change without notice.
MediaConverter-1_4117ds

Ethernet-based, Modular Media Converter Chassis

MediaConverter/1

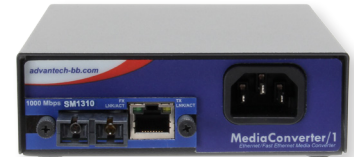

SPECIFICATIONS

TECHNICAL

1-slot AC chassis to house the following modules:
McLIM, McLIM 10/100, McGigabit

MECHANICAL

Dimensions 4.16H x 12.06W x 13.97D cm (1.64H x 4.75W x 5.5D in.)

Shipping Weight 0.9 kg (2 lbs)

POWER

115/230 or 120-240 VAC, 50/60Hz, 0.3A/0.15A

ENVIRONMENTAL

Operating Temperature – DC Terminal Block 0° to +50° C (+32° to +122° F)

Storage Temperature -25° to +70° C (13° to +158° F)

Operating Humidity 5% to 95% (non-condensing),
0 – 10000 ft. altitude

REGULATORY APPROVALS

FCC Class A, UL/CUL, CE, CSA

MECHANICAL DIAGRAM

units = inches

