

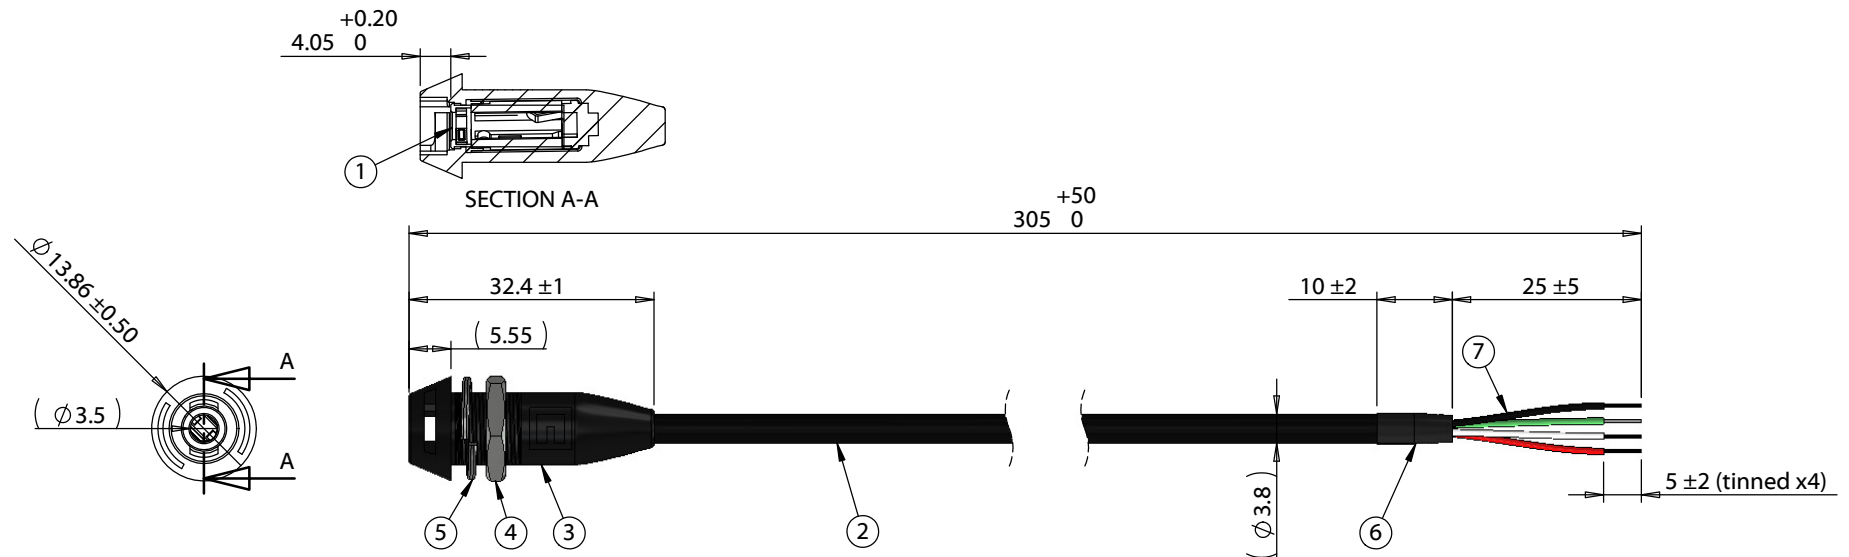



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00903	Connector, 4C audio jack, 3.5x7.0xL19.5 mm, brass, nickel plated, molding style	1	
2	30-00179	Wire, 3C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC	1	
3	24-00267	Overmold, audio jack, 3.5 mm, twist lock panel mount, TIC	1	PVC, black
4	56-00000	Hardware, nut, hex, 13x2.5 mm, M11x1.0, brass, nickel plated	1	
5	56-00001	Hardware, washer, lock, 14x11.1x1.1 mm, SPCC, nickel plated	1	
6	Heat Shrink	Heat shrink tubing, black	1	
7	Heat shrink	Heat shrink tubing, black	1	Covers shield wire



Installation Details

Panel thickness: 1.5 - 4.5 mm
 Recommended Panel cutout:



Wiring Diagram	
50-00903	wire color
A	red
B	white
C	green
D	shield/black

Notes:
 Made to mate with cable assembly: 10-03401
 Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	9/24/2019	Initial release	Verified:	RoHS compliant	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
				Description: Cable, 305 mm, 3.5 mm 4C 50-00903 twist lock panel mount audio jack to 5 mm tinned, 28 AWG	
Scale: 1:1		Part number: 10-03409		Sheet 1 of 1	