




67 MHz Crystal Filter

P/N: AM67CR285

Center Frequency (Fo): 67 MHz
Insertion Loss at Fo: <6 dB
Bandwidth (BW): Fo +/- 105 KHz
Return Loss at Fo: >12 dB
Rejection Frequency on low side (Fs-): -3 MHz
Rejection Frequency on high side (Fs+): +3 MHz
Attenuation at Fs-: >35 dB
Attenuation at Fs+: >35 dB
Power handling: 10 dBm max input power
Temperature Ambient: 0°C to +50°C
Package: PCB Mount

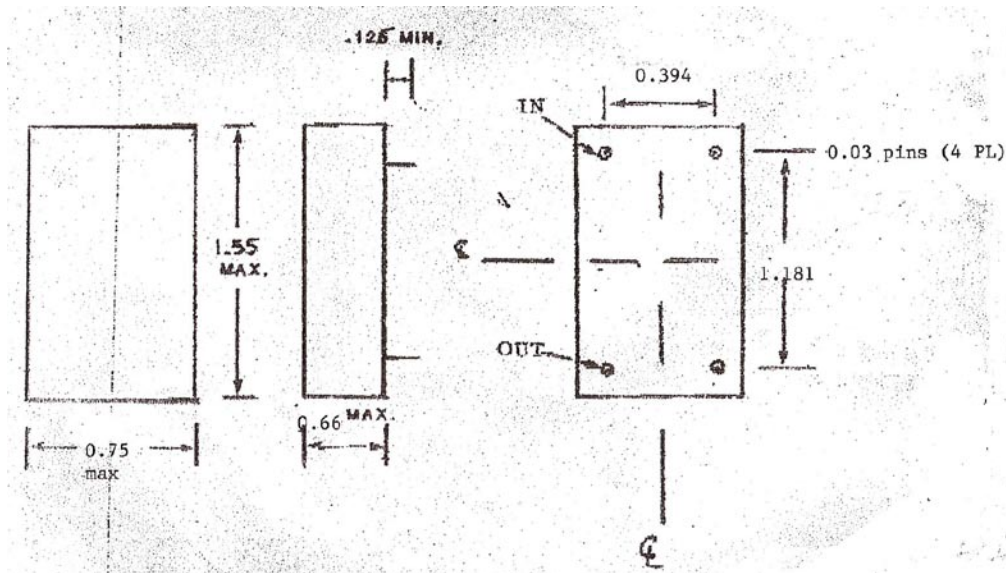



67 MHz Crystal Filter

P/N: AM67CR285

