




Dimensions: mm [inches]

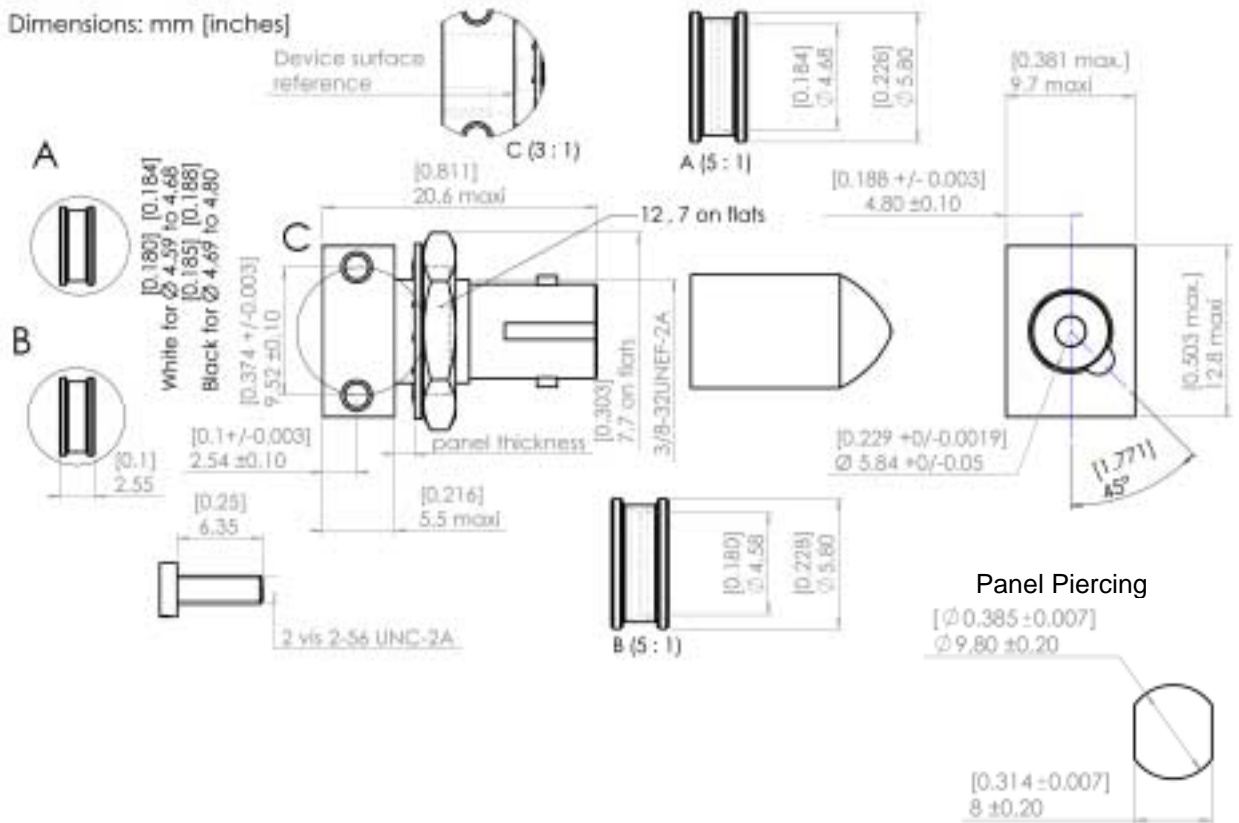

CHARACTERISTICS (Depending on fibre or cable construction)

- ELECTRICAL** : Depends on components
- OPTICAL** : Coupling efficiency depends on fibre and active device used
- OPTOELECTRONICAL** : Depends on components
- MECHANICAL** : Mechanical endurance : 1000 matings  
: Vibrations : 10 / 500Hz – 10 g
- ENVIRONMENTAL** : Service temperature : -25 °C / +70 °C  
: Damp heat : 95% HR – 4 days

CREATION					<b>RADIALL</b> <sup>®</sup>
N°:					101, rue P. Hoffmann
PEN/EP :					93116 ROSNY/BOIS
Name: B - G					FRANCE
Date: 20 11 2000	20/11/00	Nouvelle edition	B - G	L - V	Tel : (33) 0149353535
Appr.: L - V	Issue	Revisions	Name	Appr.	Fax : (33) 0148546363

4112-9212 This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary