

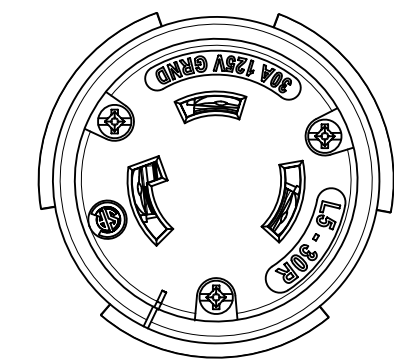
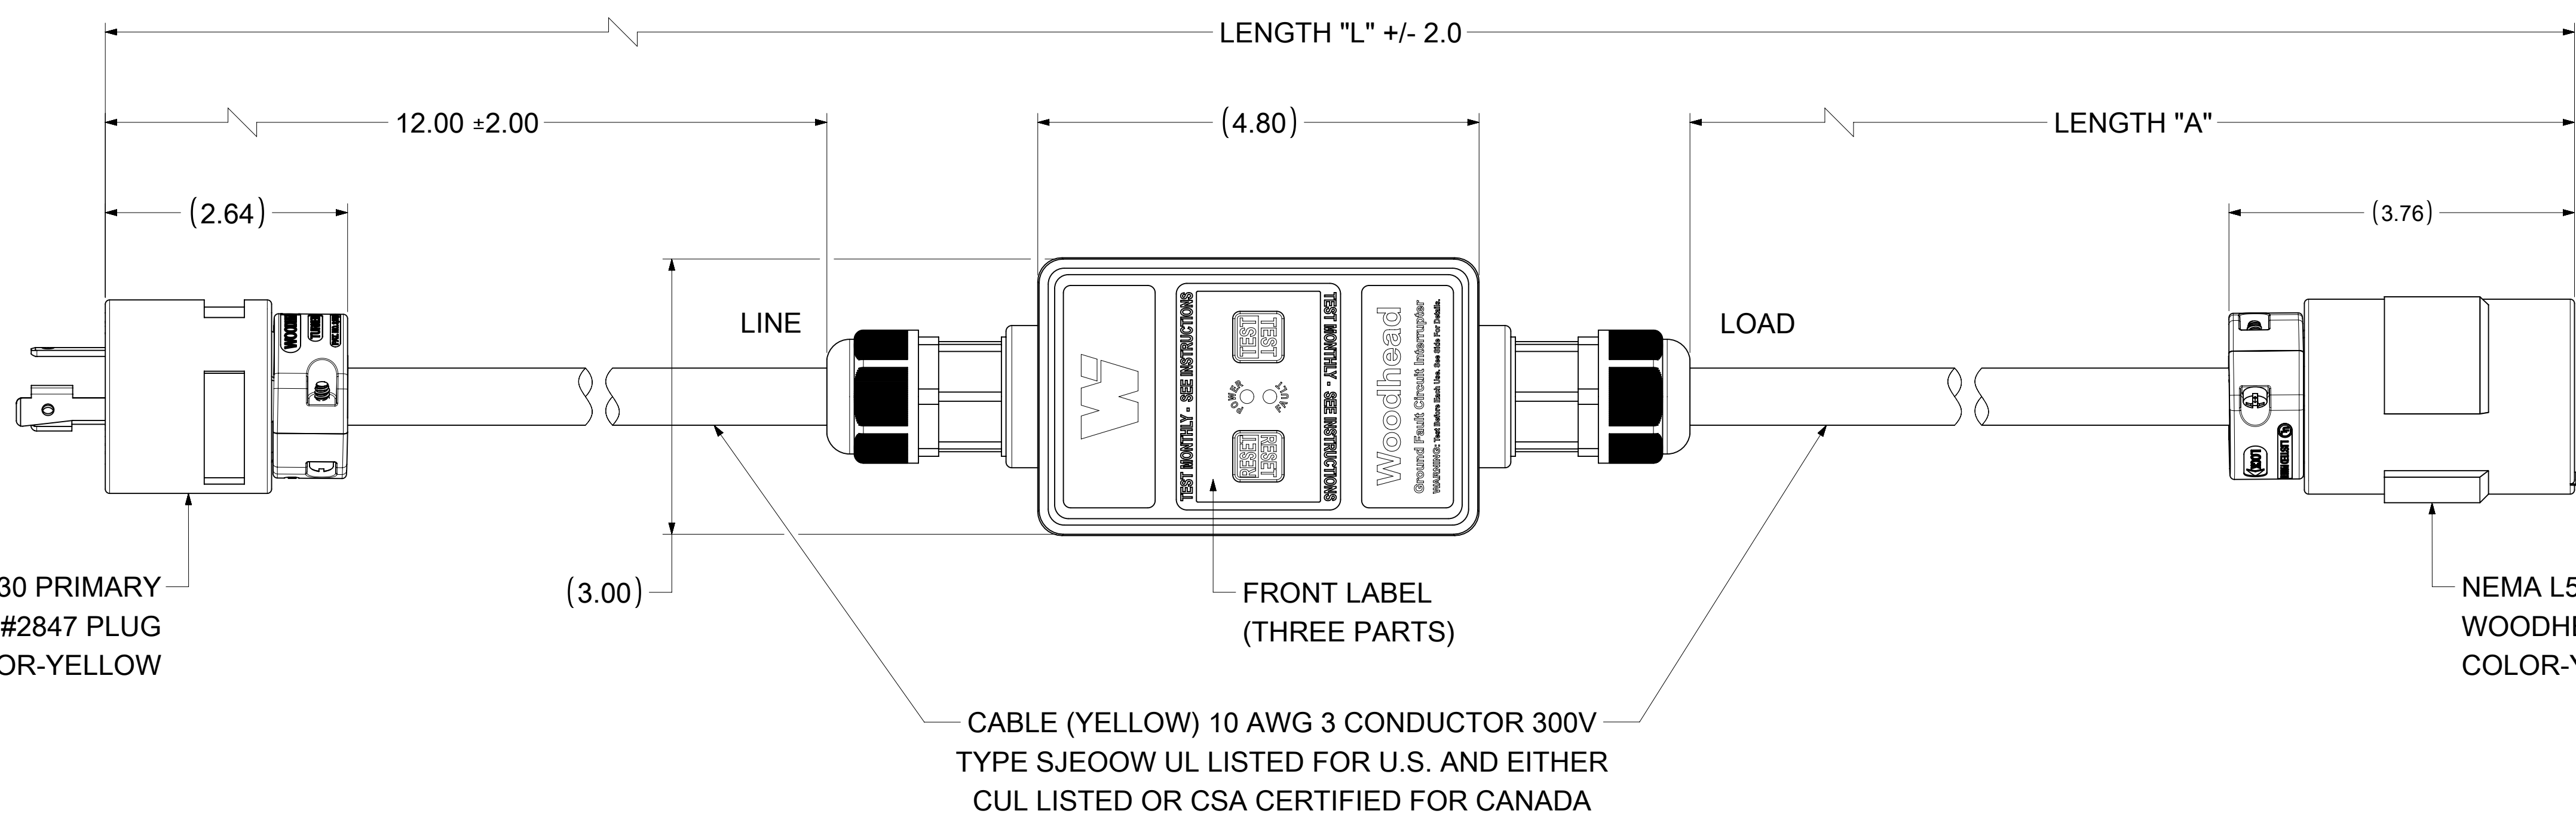
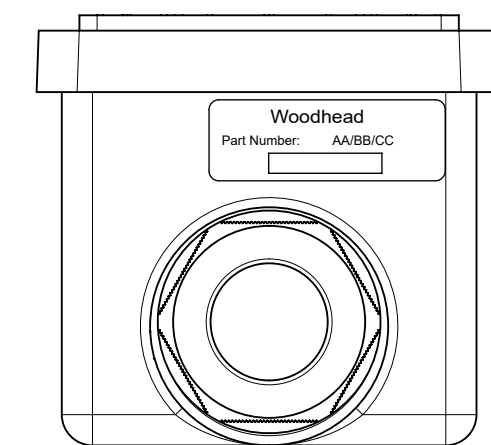


NEMA L5-30 PRIMARY  
WOODHEAD #2847 PLUG  
COLOR-YELLOW

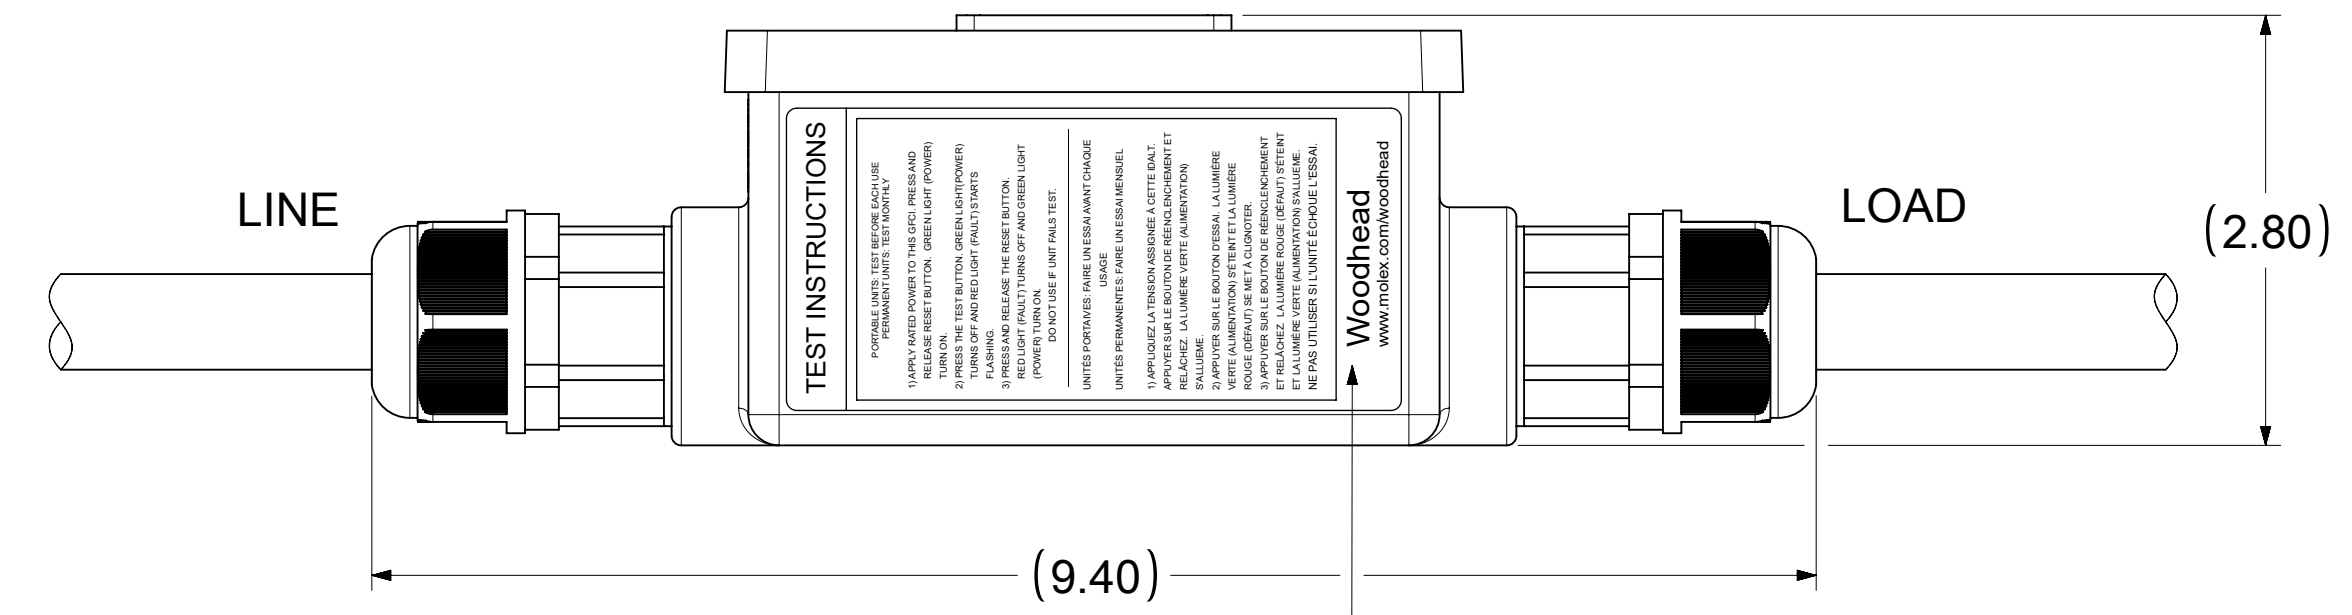

NEMA L5-30 SECONDARY  
WOODHEAD #2947 CONNECTOR  
COLOR-YELLOW

CABLE (YELLOW) 10 AWG 3 CONDUCTOR 300V  
TYPE SJE00W UL LISTED FOR U.S. AND EITHER  
CUL LISTED OR CSA CERTIFIED FOR CANADA

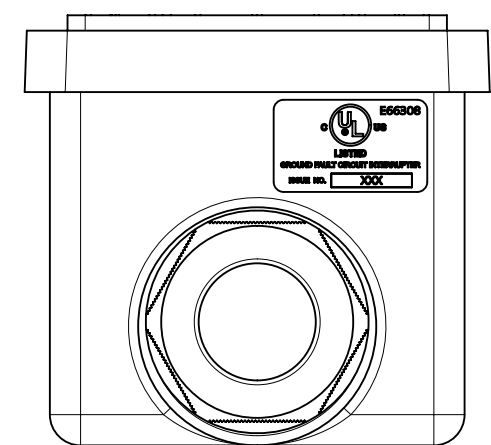

TEST INSTRUCTIONS LABEL

**TECHNICAL**

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	120VAC
RATED CURRENT:	UP TO 30 AMPS
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	180 AMPS, 0.45PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 4X/6P

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530164	30051-1A	2 FT 9.4 IN.	1 FT	AUTO
1301530171	30051-6A	7 FT 9.4 IN.	6 FT	AUTO
1301530168	30051-25A	26 FT 9.4 IN.	25 FT	AUTO
1301530165	30051-1M	2 FT 9.4 IN.	1 FT	MANUAL
1301530172	30051-6M	7 FT 9.4 IN.	6 FT	MANUAL
1301530169	30051-25M	26 FT 9.4 IN.	25 FT	MANUAL

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_C = 0$ $\nabla_P = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: UPDATED LENGTH "L" IN THE TABLE.		
	DIMENSION UNITS	SCALE	<p>30A/120V GFCI AUTO 2 FT. SUPER-SAFEWAY NEMA L5</p> <p>PRODUCT CUSTOMER DRAWING</p>		
	INCH	NTS			
	GENERAL TOLERANCES (UNLESS SPECIFIED)				
ANGULAR TOL ± °					
4 PLACES ±		EC NO: 672829	2021/08/06		
3 PLACES ±		DRWN: PPURSUTANDEL	2021/08/18		
2 PLACES ±		CHK'D: DNGUYEN62	2021/08/31		
1 PLACE ±		APPR: HKNEELAND	2021/07/31		
0 PLACES ±		INITIAL REVISION:	2021/07/30		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRWN: PPURSUTANDEL	2021/07/30		
THIRD ANGLE PROJECTION		APPR: HKNEELAND	2021/07/30		
DRAWING		SERIES	MATERIAL NUMBER	CUSTOMER	
D-SIZE		130153	SEE TABLE	GENERAL MARKET	
SHEET NUMBER		1 OF 1			