


RECOMMENDED PC BOARD LAYOUT

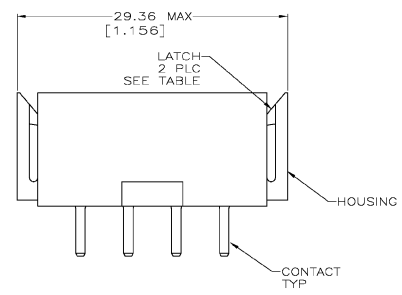

- ▲ NYLON, UL 94V-0 RATED, RED.
- ▲ BRASS PER ASTM B36.
- ▲ 3.8 $\mu$ m [0.000150] MIN TIN OVER 2.54 $\mu$ m [0.000100] MIN COPPER.
- ▲ 0.76 $\mu$ m [0.000030] MIN GOLD FOR A LENGTH OF 5.08 [0.200] FROM MATING END, 3.81 $\mu$ m [0.000150] MIN TIN FOR A LENGTH OF 4.83 [0.190] MIN FROM OPPOSITE END, BOTH OVER 1.27 $\mu$ m [0.000050] MIN NICKEL.
- ▲ 0.38 $\mu$ m [0.000015] MIN GOLD FOR A LENGTH OF 5.08 [0.200] FROM MATING END, 3.81 $\mu$ m [0.000150] MIN TIN FOR A LENGTH OF 4.83 [0.190] MIN FROM OPPOSITE END, BOTH OVER 1.27 $\mu$ m [0.000050] MIN NICKEL.
- ▲ .000150 MIN TIN OVER .000100 MIN COPPER OR .000050 MIN NICKEL.

	11.79 [0.464]	4.60±0.64 [0.181±0.025]	YES	▲	NO	1-206763-2
	11.79 [0.464]	4.60±0.64 [0.181±0.025]	YES	▲	YES	1-206763-1
OBSOLETE	11.79 [0.464]	4.60±0.64 [0.181±0.025]	NO	▲	YES	206763-9
OBSOLETE	13.31 [0.524]	3.05±0.38 [0.120±0.015]	YES	▲	NO	206763-8
	11.79 [0.464]	4.60±0.64 [0.181±0.025]	YES	▲	NO	206763-4
	11.79 [0.464]	4.60±0.64 [0.181±0.025]	YES	▲	YES	206763-3
	11.79 [0.464]	4.60±0.64 [0.181±0.025]	YES	▲	NO	206763-2
	11.79 [0.464]	4.60±0.64 [0.181±0.025]	YES	▲	YES	206763-1
	B	A				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	03/17/92	Type Electronics Corporation Harrisburg, Pa.	
DWG NO.	108-10033	DATE	3-17-92	P/N HEADER ASSEMBLY, 24 POSITION, METRIMATE	
DIMENSIONS:	0 P.L.C. = -	APPROVED SPEC.	108-10033	SIZE	A1
INCHES:	1 P.L.C. = 0.13 [0.005]	APPROXIMATOR SPEC.		CAGE CODE	206763
	2 P.L.C. = -	APPROXIMATOR SPEC.		REV	1
	3 P.L.C. = -	APPROXIMATOR SPEC.		SHEET	1 OF 1
	4 P.L.C. = -	APPROXIMATOR SPEC.		REV	W
MATERIAL:	HOUSING: 1	FINISH:	SEE TABLE	CUSTOMER DRAWING	
SCALE	4:1				