



DETAIL "A"
SCALE: 6:1
TYPICAL

NOTES:

- PARTS MUST BE TUMBLED, BURNISHED OR DEBURRED TO REMOVE ALL BURRS AND SHARP EDGES.

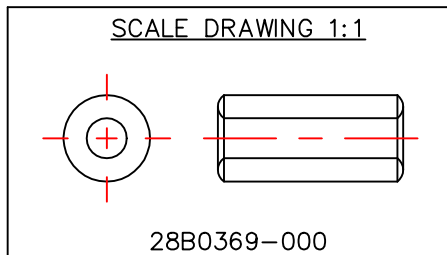

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	138 Ω	259 Ω	398 Ω
Minimum	- Ω	207 Ω	- Ω

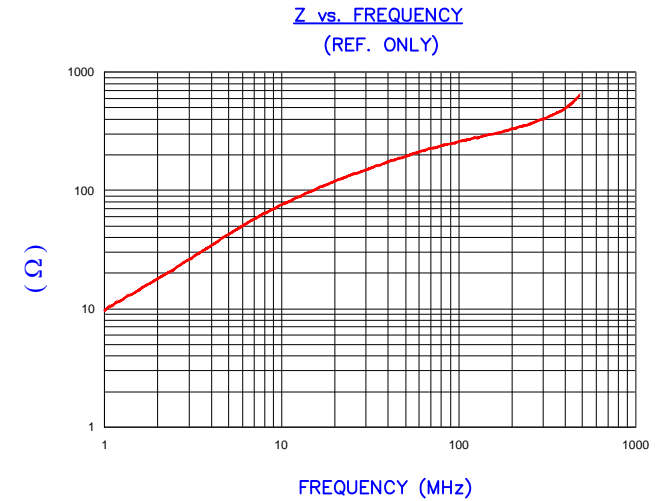

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture

FERRITE CORE DIMENSIONS (SPEC): mm/inches

A	11.96 [.471]	±	0.20 [.008]
B	5.53 [.218]	±	0.20 [.008]
C	25.62 [1.001]	±	0.20 [.008]

WEIGHT/1000 10.99 kgs 24.22 lbs

DIMENSIONS ARE IN MM [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
				PROJECT/PART NUMBER:	28B0369-000	REV	C
						PART TYPE:	FERRITE CORE
						DRAWN BY:	TMB
C	UPDATED COMPANY LOGO	08/28/14	QIU	DATE:	04/30/08	SCALE:	2 : 1
B	ADD Z SPECS AND CURVE	08/12/08	JRK	CAD #	28B0369-000-C	TOOL #	B0369
A	ORIGINAL DRAFT	04/30/08	TMB	MATERIAL:		FERRITE	
REV	DESCRIPTION	DATE	INT				