

Han-Quintax module, male

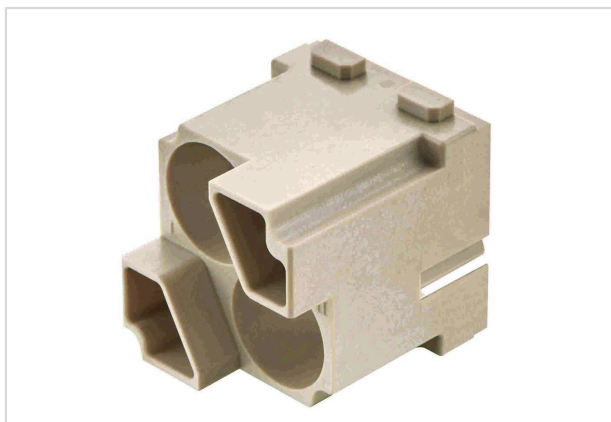


Image is for illustration purposes only. Please refer to product description.

Part number	09 14 002 3004
Specification	Han-Quintax module, male
HARTING eCatalogue	https://b2b.harting.com/09140023004

Version

Termination method	Crimp termination
Gender	Male

Technical characteristics

Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500

Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Not contained
Fire protection on railway vehicles	EN 45545-2 (2020-08)
Requirement set with Hazard Levels	R22 (HL 1-3) R23 (HL 1-3)



Pushing Performance
Since 1945

Specifications and approvals

Specifications	IEC 60664-1 IEC 61984
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076
Approvals	DNV GL

Commercial data

Packaging size	2
Net weight	7.7 g
Country of origin	Germany
European customs tariff number	85389099
GTIN	5713140184800
eCl@ss	27440207 Adapter for industrial connectors (module/contact insert)