



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00396	Connector, stereo plug, 3.5xL20.5 mm, brass, nickel plated, molding style	1	
2	30-00179	Wire, 3C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC	1	
3	24-00028	Overmold, PVC, black	1	black

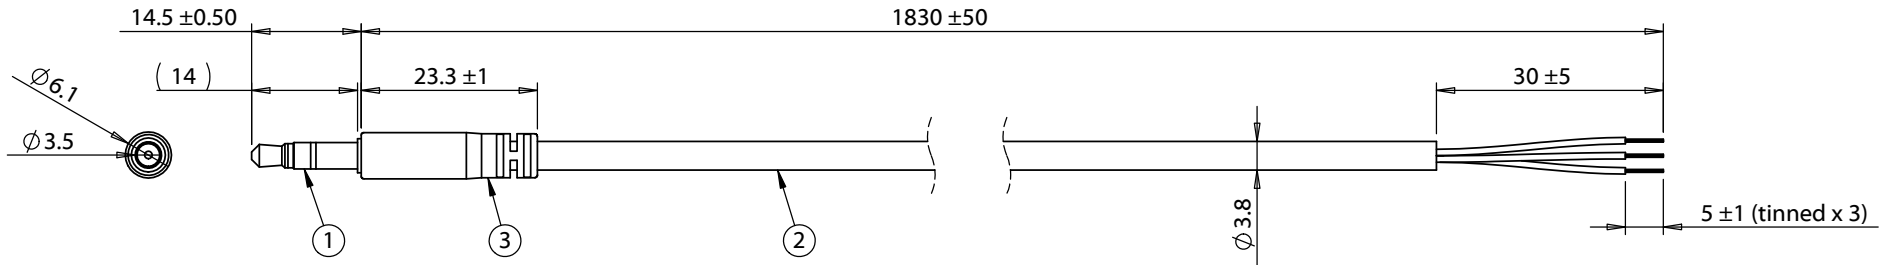

Notes:
 Cables individually tied and bundled in groups of 10
 Functionally equivalent components may be substituted



Wiring Diagram	
50-00396	wire color
A	red
B	white
C	green

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>		
A	5/4/2010	Initial release	GL <small>Digitally signed by GL Date: 2016.10.28 14:05:49 -0700</small>	RoHS compliant			
A1	9/6/2011	Updated specification	Verified: DN <small>Digitally signed by DN Date: 2016.10.28 15:30:55 -0700</small>	Function test: no open, no short circuit, no intermittent			
A2	3/28/2012	Changed wire part number	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:			
A3	10/9/2014	Changed connector		Cable, 1830 mm, 3.5 mm 50-00396 slim stereo plug to 5 mm tinned, 28 AWG, 30-00179, shielded		Size: Part number: A 10-00345	
A4	10/28/2016	Corrected overmold dimensions			Scale: 1:2		Sheet 1 of 1