


N = Number of contact

P.C.B. LAYOUT

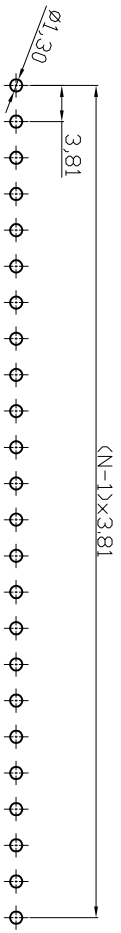

**Material**  
 Solid PIN: Brass(CuZn)  
 Surface of solder tail: Matte Tin plated. ©  
 Insulator (housing): Thermoplastic (UL 94V-0)  
 Black

**Electrical cULus**  
 Voltage rating: 300V  
 Current rating: 10A  
 Withstanding Voltage: 1.6KV  
 Operating temperature: -40°C to +115°C  
 Soldering temperature: 250°C ± 10°C/5 Sec  
 Safety Approval:

**RoHS compliant**  
 Unit: mm  
  
 File No.: E349947

Scale	Free		
<b>TOLERANCE</b>			
X.	±0.50		
X.X	±0.30		
X.XX	±0.10		
<b>DIM</b>			
	TOL		
X.°	±1°		
Angle	TOL	Id.	

Date	Name	Customer-No.
18.04.2016	Amy	ASSMANN WSW-No. A-TB381-OPXX
29.07.2009	Dean	Drawing-No. ASS 3597 CO
23.07.2014	Amy	Replace Sheet



1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	H