


Data sheet

2047.4 AP SI BK

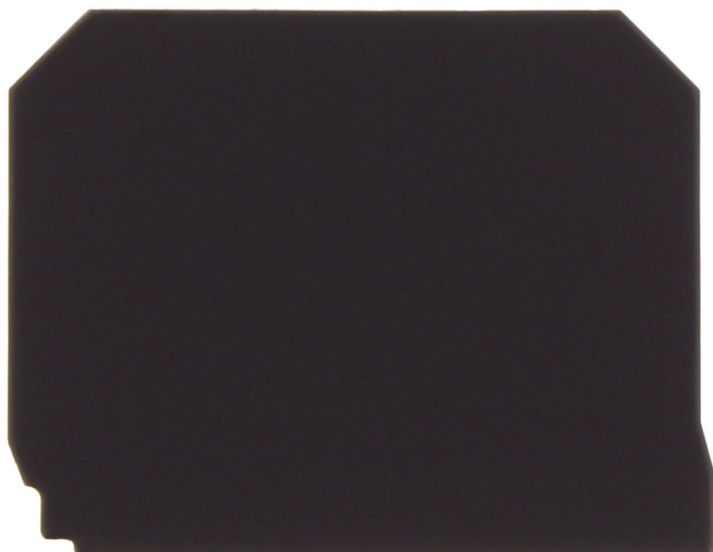

End plate, Width: 2.7 mm, Colour: Black

RAL: 9005

Business data

| | |
|--|---------------|
| Article number | 2047.4 |
| Article name | AP SI BK |
| GTIN (EAN) | 4044211130183 |
| Packaging unit | 20 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 4.76 g |
| Weight per piece (including packaging) | 4.91 g |
| Unit of weight | G |
| Customs number | 85389099 |
| Country of origin | DE |
| Prio-Article | 2047.2 |
| Product description | End plate |

Technical data

Dimensions

| | |
|----------------|---------|
| Length | 53.8 mm |
| Width | 2.7 mm |
| Min. thickness | 2.7 mm |
| Height | 41.6 mm |

Materials

| | |
|---------------------------|---------------|
| Material | Polyamide 6.6 |
| Flammability class UL 94 | V-2 |
| Working temperature, min. | -40 °C |
| Working temperature, max. | 105 °C |

Further technical data

| | |
|-----------------------|---|
| Designed as end plate | ✓ |
| Snap-on available | ✓ |

Environmental Product Compliance

| | |
|--------------------------------|-----|
| REACH Conform | yes |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |

Data sheet

2047.4 AP SI BK



Media

Accessories

##INVERSE##CONTA-CONNECT




Fused terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 10 mm², Width: 12.2 mm, Colour: Black

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------------------------|---------------|----------------|
| <u>1004.4</u> | SK 1/35 24V AC LED(RD) PA-G BK | 4044211129989 | 20 ST |



Fused terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 10 mm², Width: 12.2 mm, Colour: Black

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------------------------|---------------|----------------|
| <u>1119.4</u> | SK 1/35 48V AC LED(RD) PA-G BK | 4044211130008 | 20 ST |



Fused terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 10 mm², Width: 12.2 mm, Colour: Black

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|---------------------------|---------------|----------------|
| <u>1375.4</u> | SK 1/35 230V AC G PA-G BK | 4044211129941 | 20 ST |



Fused terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 10 mm², Width: 12.2 mm, Colour: Black

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------------------------|---------------|----------------|
| <u>1380.4</u> | SK 1/35 24V DC LED(RD) PA-G BK | 4044211129972 | 20 ST |



Fused terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 10 mm², Width: 12.2 mm, Colour: Black

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|-----------------|---------------|----------------|
| <u>1367.4</u> | SK 1/35 PA-G BK | 4044211128555 | 20 ST |



Fused terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 10 mm², Width: 12.2 mm, Colour: Black

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------------------------|---------------|----------------|
| <u>1067.4</u> | SK 1/35 48V DC LED(RD) PA-G BK | 4044211129996 | 20 ST |

##INVERSE##CONTA-CONNECT



Fused terminal with screw cap for indicator fuses 5x25 mm, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 10 mm², Width: 12.2 mm, Colour: Black

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|----------------------|---------------|----------------|
| <u>1368.4</u> | SK 1/35 m.K. PA-G BK | 4044211129811 | 20 ST |



Fused terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 10 mm², Width: 12.2 mm, Colour: Black

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|---------------------------|---------------|----------------|
| <u>1376.4</u> | SK 1/35 115V AC G PA-G BK | 4044211129958 | 20 ST |