


## DisplayPort Cable with Latching Connectors (M/M), 8K 60 Hz, HDR, HBR3, 4:4:4, HDCP 2.2, Black, 9 ft. (2.7 m)

MODEL NUMBER: P580-009-8K6

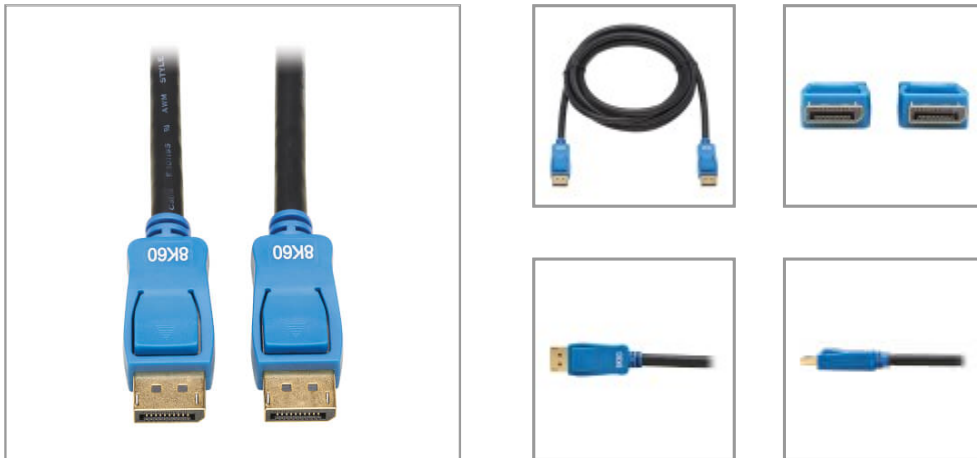

8K DisplayPort cable connects your source and display devices to transmit enhanced 8K UHD audio/video with HDR and 4:4:4 chroma.

### Features

**DisplayPort 1.4 Cable Gets Your Gaming, Home Theater or Digital Signage Setup 8K-Ready** This high-speed DisplayPort (DP) cable (M/M) securely connects source and display devices compatible with DP 1.4 audio/video signals. Backward compatible with all your existing DisplayPort devices, including Blu-ray players, game consoles and 4K televisions, the P580-009-8K6 is ideal for future-proofing your high-definition or UHD A/V application in anticipation of an 8K upgrade. Its HBR3 data rate supports a large bandwidth, allowing for 8K @ 60 Hz resolutions.

**Enjoy the Clarity of 4K/8K Video with Multi-Channel Audio and 4:4:4 Color** The P580-009-8K6 supports 8K UHD resolutions up to 7680 x 4320 at 60 Hz with multi-channel sound. It's compatible with DisplayPort 1.4 standards for carrying HDR, providing a wide range of vibrant colors with richer contrast, brighter whites and deeper blacks. HDCP 2.2 compliance allows you to stream 4K Amazon and Netflix content with no complications. This BT.2020-compatible cable also supports 4:4:4 chroma subsampling for top-level PC gaming or using your HDTV as a PC monitor.

**Invest in Quality Construction for Reliable Performance** You're expecting this 8K cable to last a long time, which is why it has been constructed with high-quality materials, such as a rugged PVC jacket. Contacts and connectors are gold-plated to resist corrosion. Double shielding reduces line noise (EMI/RFI) that can disrupt signals traveling through the DisplayPort cord.

## Specifications

OVERVIEW	
UPC Code	037332254122
Product Type	Passive Cable
Technology	DisplayPort

### Highlights

- Supports UHD resolutions up to 8K @ 60 Hz (4:4:4) for heightened video quality
- Carries High Dynamic Range (HDR) signals for rich contrast and expanded color accuracy
- Complies with HDCP 2.2 standards to display up-to-date 4K video content
- Improves maximum bandwidth to enable enhanced HBR3 applications
- Plug-and-play operation with no software required for easy, immediate installation

### Applications

- Watch 8K video from a compatible Blu-ray player, game console, laptop or tablet on a compatible television, monitor or projector
- Connect a Windows laptop to a conference table's A/V box to give a video presentation on a large screen
- Play online or PC video games that display optimal graphics
- Send 8K video content to digital signs or point-of-sale displays

### System Requirements

- Both source and display devices must be compatible with 8K standards to watch 8K video

### Package Includes

- P580-009-8K6 DisplayPort 1.4 Cable, 8K UHD @ 60 Hz, M/M, Black, 9 ft.

Cable Type	Passive
<b>VIDEO</b>	
Max Supported Video Resolution	7680 x 4320 (8K) @ 60Hz
Max Supported Color Depth	24-bit True Color
HDR Support	Yes
3D Video Supported	Yes
Chroma Sub Sampling	4:4:4
<b>INPUT</b>	
Bus Powered	Yes
<b>PHYSICAL</b>	
Color	Black
Material of Construction	PVC
Cable Jacket Color	Black
Connector Color	Blue
Cable Jacket Material	PVC
Cable Jacket Rating	VW-1
Cable Outer Diameter (OD)	6.8 mm
Wire Gauge (AWG)	30
Cable Length (ft.)	9
Cable Length (m)	2.74
Cable Length (in.)	108
Ferrite Core	No
Shipping Dimensions (hwd / in.)	9.50 x 7.00 x 0.75
Shipping Weight (lbs.)	0.39
Shipping Weight (kg)	0.18
Unit Dimensions (hwd / in.)	9.500 x 7.000 x 0.750
Unit Packaging Type	Polybag
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	14° to 122°F (-10° to 50°C)
Storage Temperature Range	5° to 140°F (-15° to 60°C)
Operating Humidity Range	0% to 90% RH, Non-Condensing
Storage Humidity Range	0% to 90% RH, Non-Condensing

COMMUNICATIONS	
EDID Compatible	Yes
Consumer Electronics Control (CEC) Supported	Yes
CONNECTIONS	
Side A - Connector 1	DISPLAYPORT (MALE)
Side B - Connector 1	DISPLAYPORT (MALE)
Connector Plating	Gold
Contact Plating	Gold
Latching or Gripping Connector	Yes
FEATURES & SPECIFICATIONS	
Antimicrobial	No
EMI/RFI Line Noise Protection	No
Integrated/Removable Cable	No
MST Support	No
Antibacterial	No
IP68 Rated	No
IP20 Rated	No
Fully Molded Connector Ends	No
Ohms	No
Integral Strain Relief	No
Impedance-Matched Twisted-Pair Construction	No
Scaler Function	No
IP67 Rated	No
Displayport Specification	1.4
HDCP Specification	2.2
DIN Mountable	No
STANDARDS & COMPLIANCE	
Product Compliance	CE (Europe); FCC (USA); REACH; RoHS; UKCA; WEEE
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	Lifetime limited warranty



1000 Eaton Boulevard  
Cleveland, OH 44122  
United States



© 2023 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.