



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
H	-	J	REVISED PER ECO-13-015151	17DEC2013	FL	FY	

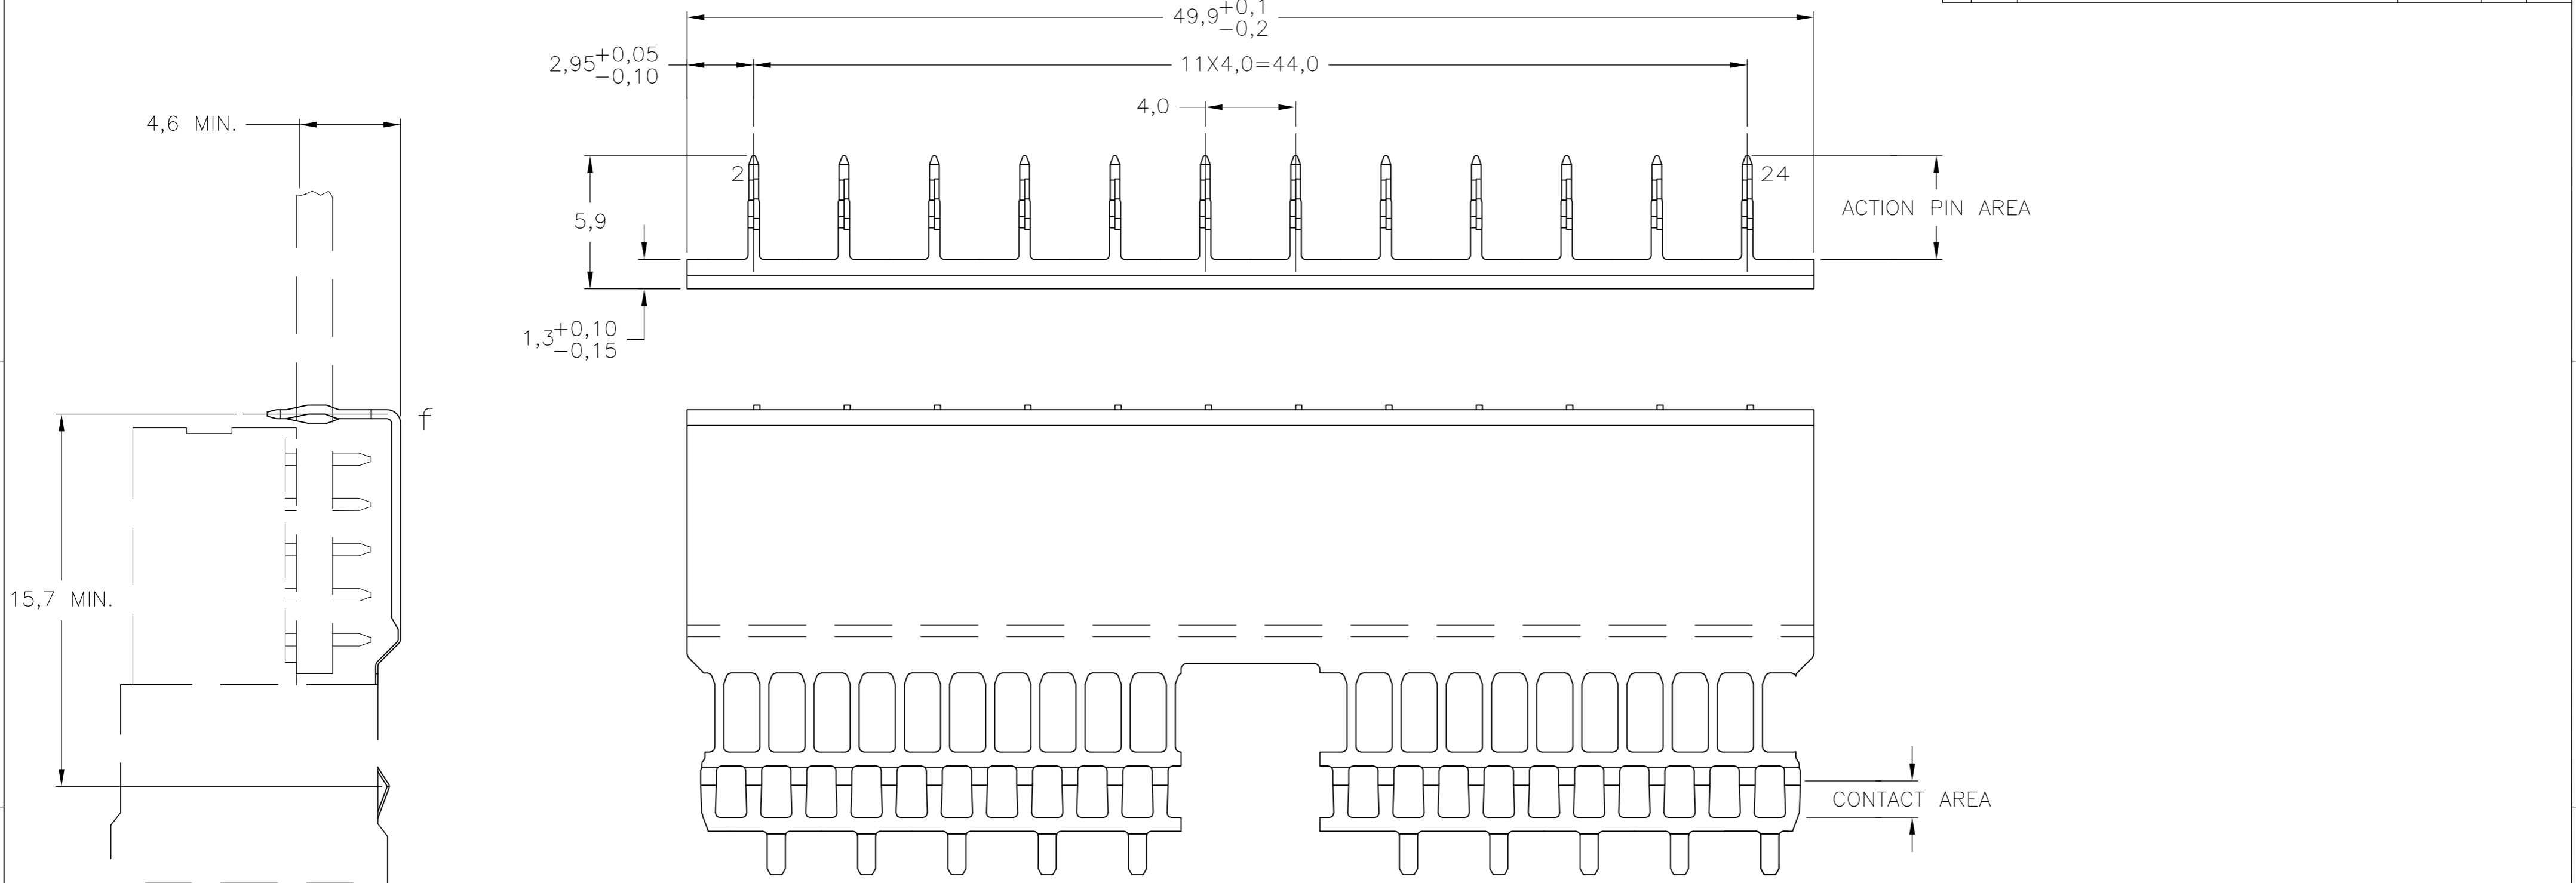

- NOTES:**
- ⚠ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN-LEAD MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
  - ⚠ MATERIAL; PHOSPHORBRONZE.
  - ⚠ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
  - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A WITH UPPERSHIELD, 110+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. MAX. BOARD THICKNESS 3,5 mm.
  - ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
  - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
  - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
  - ⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
  - ⚠ 0.76µm MIN GOLD PLATING AT MATING SURFACE.

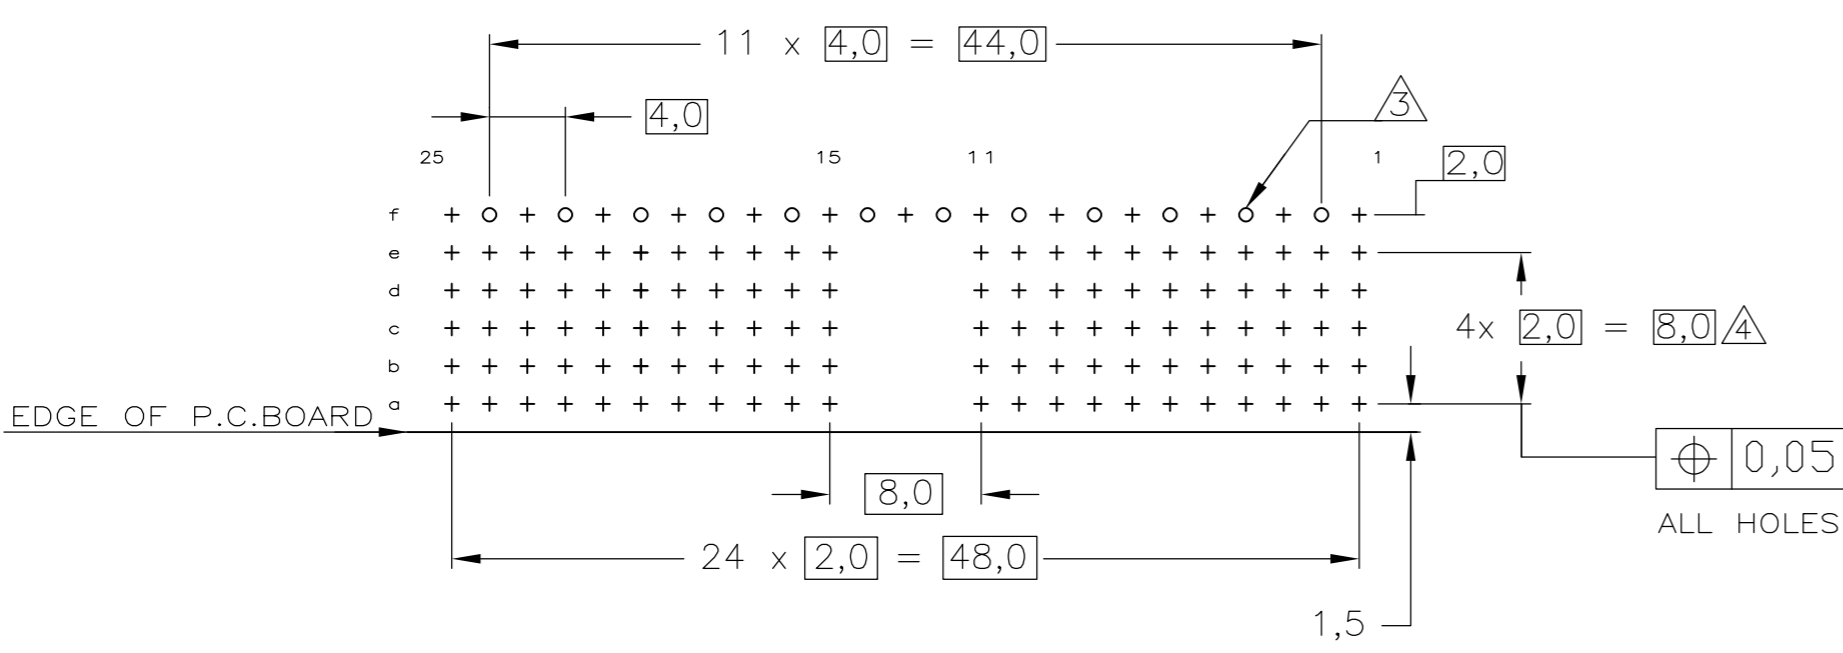

P.C.B. HOLE DIM. ACTION PIN  
 FOR DETAILS SEE APPLICATION SPECIFICATION

OBSOLETE	⚠ ⚠ ⚠ ⚠	⚠	4-338108-0
	⚠ ⚠ ⚠	⚠	-338108-9-
	⚠ ⚠	⚠	338108-2
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	27-11-96	 TE Connectivity	Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE A
DIMENSIONS: mm		CHK	27-11-96		
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2		APVD			
		PRODUCT SPEC	108-19082		
MATERIAL		APPLICATION SPEC	114-19029	SIZE	A2
FINISH		WEIGHT	-	CAGE CODE	00779
CUSTOMER DRAWING		SCALE	5:1	DRAWING NO	C=338108
		SHEET	1 of 1	RESTRICTED TO	-
		REV	J		