

## TSREH Enclosure / Control Panel Heaters


### Product Highlights

- ✓ Prevents condensation or freezing of electronics located within enclosures and control panels
- ✓ Easy-to-install mounting plate
- ✓ Air sensing thermostat for most models



### Specifications:

- Heater vulcanized to an aluminum plate for easy installation
- Aluminum mounting plate has two mounting slots that are 1/4 in x 5/32 in (6 mm x 4 mm) centered in a 1/2 in (12 mm) flange for mounting
- Suggested mounting method is at the bottom of the enclosure, mounted vertically
- 120 VAC. Other voltages available upon request
- 48 in (1219 mm) PFA extruded leads
- Safe to operate, no exposed electrical connections
- Overall thickness (blanket and bracket): 0.140 in (3.6 mm)
- Bracket: 0.09 in (2.3 mm) thick aluminum
- Exposure temperature range: -70°F to 392°F (-57°C to 200°C)
- Moisture, chemical, and radiation resistant

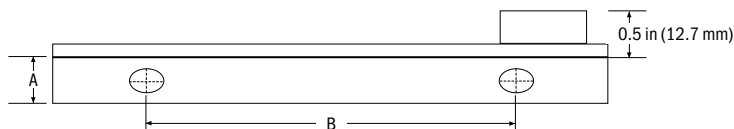

### Ordering Information:

Width* in (mm)	Length in (mm)	(A) Mounting Flange Width in (mm)	(B) Mounting Holes Center in (mm)	Total Watts	Thermostat		Part Number 120VAC	Part Number 240VAC
					Opens	Closes		
2.5 (64)	6 (152)	0.5 (12.7)	4 (102)	60	N/A	N/A	TSREH600	TSREH2600
2.5 (64)	6 (152)	0.5 (12.7)	4 (102)	60	60°F (15°C)	40°F (4°C)	TSREH640	TSREH2640
2.5 (64)	6 (152)	0.5 (12.7)	4 (102)	60	140°F (60°C)	110°F (43°C)	TSREH6110	N/A
2.5 (64)	6 (152)	0.5 (12.7)	4 (102)	60	180°F (82°C)	150°F (65°C)	TSREH6150	N/A
2.5 (64)	12 (305)	0.5 (12.7)	9 (229)	120	N/A	N/A	TSREH1200	TSREH21200
2.5 (64)	12 (305)	0.5 (12.7)	9 (229)	120	60°F (15°C)	40°F (4°C)	TSREH1240	TSREH21240
2.5 (64)	12 (305)	0.5 (12.7)	9 (229)	120	140°F (60°C)	110°F (43°C)	TSREH12110	N/A
2.5 (64)	12 (305)	0.5 (12.7)	9 (229)	120	180°F (82°C)	150°F (65°C)	TSREH12150	N/A

\* Dimensions listed are for heater and bracket; actual heater width is 2.0 in (51 mm)

**Other sizes and thermostat settings are available upon request**