STRADA-2X2-5050-DWC

Universal road lighting beam with excellent mixed illuminance and luminance uniformity. Typically IESNA Type III (medium).

SPECIFICATION:

Dimensions 50.0 x 50.0 mm 7.4 mm Height Fastening pin, screw yes 🕕 ROHS compliant



MATERIALS:


Material Colour **Finish** Component **Type** STRADA-2X2-5050-DWC Multi-lens **PMMA** clear

ORDERING INFORMATION:

Qty in box MPQ Component MOQ Box weight (kg) C17831_STRADA-2X2-5050-DWC 800 160 160 8.1

» Box size: 480 x 280 x 300 mm



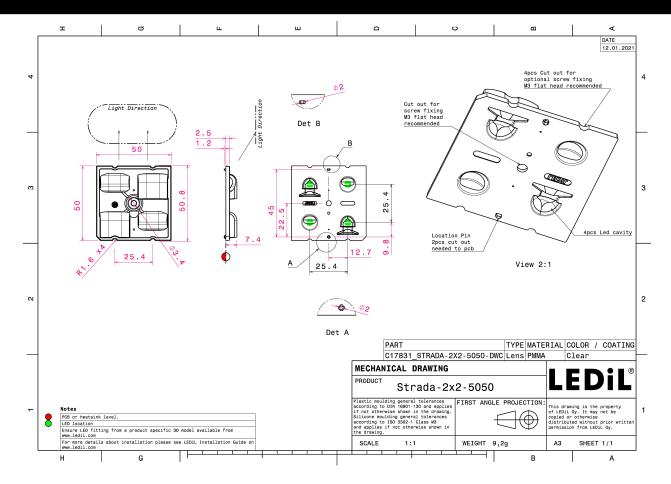

See also our general installation guide: www.ledil.com/installation_guide


Published: 21/04/2021

OPTICAL RESULTS (MEASURED):

CREE . LED

LED J Series 5050C 6V E Class


FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



PHILIPS

LED Fortimo FastFlex LED 2x8 DA HE

FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



3/10

OPTICAL RESULTS (SIMULATED):



LED J Series 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White

Required components:


Protective plate, glass

CREE + LED

LED J Series 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:




CREE + LED

LED J Series 5050B 6V K Class

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:




CREE - LED

LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 77 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:


Protective plate, glass





LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:



MUMILEDS

LED LUXEON 5050 HE
FWHM / FWTM Asymmetric


Efficiency 80 %

Peak intensity 0.4 cd/lm

LEDs/each optic 1

Light colour White

Protective plate, glass




LUMILEDS

Required components:

LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:


Protective plate, glass



LUMILEDS

LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:






LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White

Required components:




MUMILEDS

LUXEON 5050 Square LES LED

FWHM / FWTM Asymmetric Efficiency 80 % Peak intensity 0.3 cd/lm LEDs/each optic 1 White Light colour Required components:


Protective plate, glass



WNICHIA

LED NFMW48xA $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 93 % Peak intensity 0.5 cd/lm LEDs/each optic 1

Light colour White Required components:




OSRAM

LED Duris S8 FWHM / FWTM Asymmetric Efficiency 81 % 0.4 cd/lm

Peak intensity LEDs/each optic White Light colour Required components:

Protective plate, glass




Published: 21/04/2021

OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass



PHILIPS

LED Fortimo FastFlex LED 2x8 DA HE

FWHM / FWTM Asymmetric

Efficiency 82 %


Peak intensity 0.4 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass




SAMSUNG

LED LH351C
FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass


Required components:



SAMSUNG

LED LH351C
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:



SAMSUNG

LED LH502C
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.3 cd/lm


LEDs/each optic 1

Required components:

Light colour

Protective plate, glass

White




SAMSUNG

LED LH502C
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm

LEDs/each optic 1
Light colour White

Required components:



SAMSUNG

LED LH502D
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm


LEDs/each optic 1
Light colour White
Required components:

SAMSUNG


LED LH502D
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1

LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass





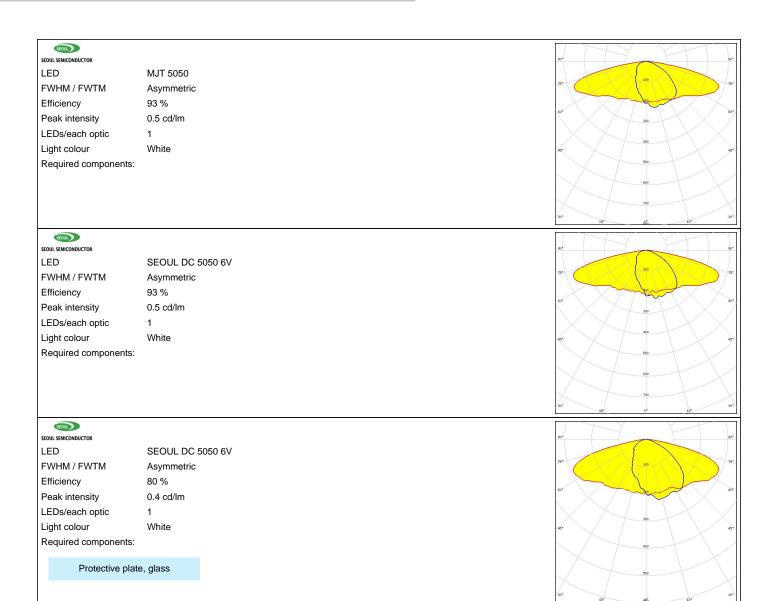



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

10/10

www.ledil.com/ where_to_buy