


## 3205.2 FSL 1,5/4A GNYE

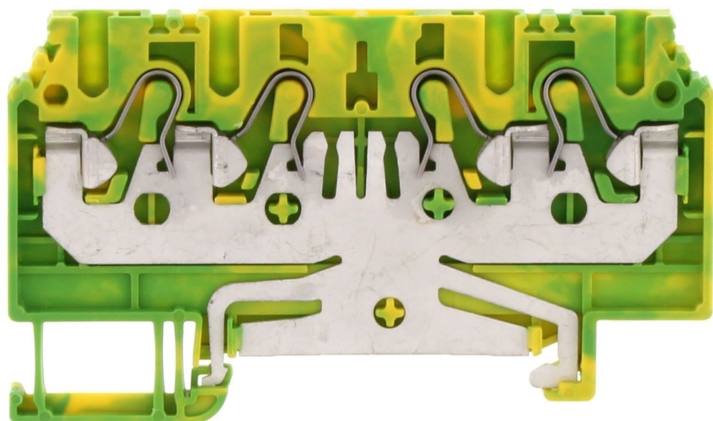

Protective earth terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 1.5 mm<sup>2</sup>, Width: 4.1 mm, Colour: Green-yellow

### Business data

|  |                           |
|--|---------------------------|
| Article number                             | 3205.2                    |
| Article name                               | FSL 1,5/4A GNYE           |
| GTIN (EAN)                                 | 4044211110123             |
| Packaging unit                             | 100                       |
| Quantity unit                              | PC                        |
| Weight per piece (not including packaging) | 11.2 g                    |
| Weight per piece (including packaging)     | 12 g                      |
| Unit of weight                             | G                         |
| Customs number                             | 85369010                  |
| Country of origin                          | BG                        |
| Product description                        | Protective earth terminal |
| Colour                                     | Green-yellow              |

### Technical data

#### Dimensions

|                  |         |
|------------------|---------|
| Length           | 72.2 mm |
| Width            | 4.1 mm  |
| Height           | 42.3 mm |
| Height TS 35/7.5 | 43 mm   |

#### Ratings

|                      |                     |
|----------------------|---------------------|
| Rated cross-section  | 1.5 mm <sup>2</sup> |
| Overvoltage category | III                 |
| Contamination degree | 3                   |

#### Connection data

|  |                     |
|--|---------------------|
| Connection principle                                     | Push-in connection  |
| Connection position                                      | Top                 |
| Connections  | 4                   |
| Number of terminals per level                            | 4                   |
| Number of levels   | 1                   |
| Wire cross-section single-core (rigid) / stranded, min.  | 0.2 mm <sup>2</sup> |
| Wire cross-section single core (rigid)/stranded, max.    | 1.5 mm <sup>2</sup> |
| Wire cross-section stranded, min.                        | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded, max.                        | 1.5 mm <sup>2</sup> |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded with wire-end ferrules, max. | 1.5 mm <sup>2</sup> |
| Wire cross-section AWG, min.                             | 24                  |
| Wire cross-section AWG, max.                             | 16                  |
| Stripping length   | 12 mm               |

#### Materials

|                           |               |
|---------------------------|---------------|
| Insulation housing        | Polyamide 6.6 |
| Flammability class UL 94  | V-0           |
| Working temperature, min. | -40 °C        |
| Working temperature, max. | 120 °C        |

---

### Technical data

---

#### Further technical data

|                                     |                         |
|-------------------------------------|-------------------------|
| Mounting type                       | Mounting rail TS 35/7,5 |
| Gauge plug acc. to EN 60 947-1      | A1                      |
| Number of cross-connection channels | 2                       |
| End plate required                  | ✓                       |

#### Environmental Product Compliance

|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2023-01-17 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |

### Approvals

#### Standards and regulations

|              |                |
|--------------|----------------|
| EAC approval | TR ZU 004/2011 |
|--------------|----------------|

|                      |     |
|----------------------|-----|
| EAC approval granted | yes |
|----------------------|-----|

#### CSA approval

|              |              |
|--------------|--------------|
| CSA approval | C22.2 No 158 |
|--------------|--------------|

|                      |     |
|----------------------|-----|
| CSA approval granted | yes |
|----------------------|-----|

|                                  |    |
|----------------------------------|----|
| CSA wire cross-section AWG, min. | 24 |
|----------------------------------|----|

|                                  |    |
|----------------------------------|----|
| CSA wire cross-section AWG, max. | 16 |
|----------------------------------|----|

|                      |       |
|----------------------|-------|
| CSA stripping length | 12 mm |
|----------------------|-------|

#### CSAus approval

|                |         |
|----------------|---------|
| CSAus approval | UL 1059 |
|----------------|---------|

|                        |     |
|------------------------|-----|
| CSAus approval granted | yes |
|------------------------|-----|

|                                    |    |
|------------------------------------|----|
| CSAus wire cross-section AWG, min. | 24 |
|------------------------------------|----|

|                                    |    |
|------------------------------------|----|
| CSAus wire cross-section AWG, max. | 16 |
|------------------------------------|----|

|                        |       |
|------------------------|-------|
| CSAus stripping length | 12 mm |
|------------------------|-------|

#### KEMA KEUR approval

|                    |                   |
|--------------------|-------------------|
| KEMA KEUR approval | EN 60947-7-2:2009 |
|--------------------|-------------------|

|                            |     |
|----------------------------|-----|
| KEMA KEUR approval granted | yes |
|----------------------------|-----|

|   |                     |
|---|---------------------|
| KEMA wire cross-section single core (rigid), min. | 0.2 mm <sup>2</sup> |
|---|---------------------|

|   |                     |
|---|---------------------|
| KEMA wire cross-section single-core (rigid), max. | 1.5 mm <sup>2</sup> |
|---|---------------------|

|  |                     |
|--|---------------------|
| KEMA wire cross-section stranded, min. | 0.2 mm <sup>2</sup> |
|--|---------------------|

|  |                     |
|--|---------------------|
| KEMA wire cross-section stranded, max. | 1.5 mm <sup>2</sup> |
|--|---------------------|

### Media



# EAC

### Accessories

#### End plate

End plate, Width: 1.5 mm, Colour: Beige



| Article number | Article name  | GTIN (EAN)    | Packaging unit |
|----------------|---------------|---------------|----------------|
| <u>3402.2</u>  | FAP 1,5/4A BG | 4044211110314 | 20             |

#### End stop

End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige



| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>3811.2</u>  | ZES 35/2 BG  | 4044211080600 | 50             |

#### Quick marking

Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 4 mm, Colour: White



| Article number | Article name   | GTIN (EAN)    | Packaging unit |
|----------------|----------------|---------------|----------------|
| <u>4820.7</u>  | PMC SB 4/50 WH | 4044211112127 | 500 ST         |

#### Four-way cover

Cover, Length: 3.4 mm, Width: 15.7 mm, Colour: Yellow



| Article number | Article name   | GTIN (EAN)    | Packaging unit |
|----------------|----------------|---------------|----------------|
| <u>3425.8</u>  | FAD 1,5/4/B YE | 4044211132910 | 20 ST          |