

ø30mm Planetary Gear Motor Carbon - Brushed

MOT-I-46008

Our Planetary Gear Motors are an inline solution providing excellent torque output at various speeds. They are equiped to handle varying loads and are best for intermittent duty operation. With endless performance combinations, we have a fully tailored gear motor solution for you.




View Alternative Solutions!

Specifications	
Gearhead Type:	Planetary
Motor Type:	Carbon - Brushed
Rated Voltage:	24V DC
Rated Speed:	161 rpm
Rated Torque:	5.3 kg.cm
Rated Current:	1 A

No-Load Speed:	211 rpm (+/- 10%)
No-Load Current:	< 310 mA
Stall Torque:	22.25 kg.cm
Max. Power:	12 W
Reduction Ratio:	35:1
Termination Style:	Terminals

Dimensions

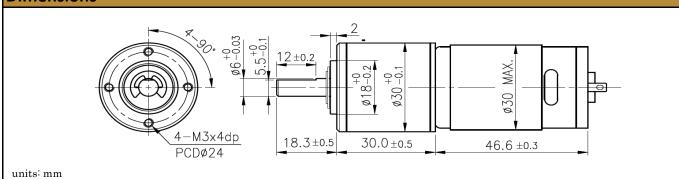

Performance Curve EP I 100 3.10 Po 12.10 220 Pe Т N 6.05 50 1.55 110 EF W q 11.15 22.30 T:Torque N:Sp Po:Output Power N:Speed I:Current EF:Efficieney T (Kg-cm)



© 2022 ISL Products International Ltd. Specifications subject to change without notice.

ISL Products International Ltd. • 572 Walt Whitman Rd. ,Ste 100 • Melville, NY 11747 • T 516-937-3475 • www.islproducts.com