


Specification Sheet

Part Number: 151-01857

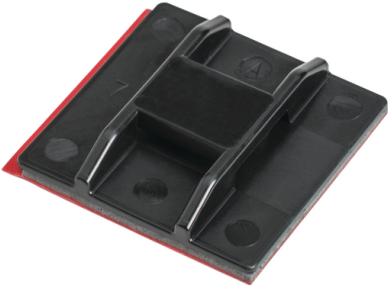

For use with HellermannTyton T18 - T150 or Wide Strap cable ties to provide stability when securing bundles.

The high-heat, high-bond adhesive is ideal for outdoor applications, with a static load weight of 2.1 lb.

Extended adhesive liner is easy to remove quickly.

High Heat High Bond Acrylic Adh Base, 1.5" x 1.5", Use T18-T150 or WideStrap Tie, PA66HIRHSUV, Bk, 100/pkg

Article Number 151-01857

Type WSMB5AHB

Color Black (BK)

Quantity Per bag

Product Description HellermannTyton's Wide Strap Adhesive Mount pairs with our exclusive line of Wide Strap Cable Ties and is ideal for extreme-duty applications. The mount features 3M™ VHB™ (Very High Bond adhesive, which actually builds strength over time and holds securely to difficult materials such as aluminum, steel, plastics and painted and powder-coated surfaces.

Short Description High Heat High Bond Acrylic Adh Base, 1.5" x 1.5", Use T18-T150 or WideStrap Tie, PA66HIRHSUV, Bk, 100/pkg

| | |
|--------------------------------|--|
| Global Part Name | WSMB5AHB-PA66HIRHSUV-BK |
| Length L (Imperial) | 1.49 |
| Length L (Metric) | 37.7 |
| Fixation Method | Adhesive |
| Width W (Imperial) | 1.49 |
| Width W (Metric) | 37.7 |
| Cable Ties | T18 - T150 |
| Height H (Imperial) | .30 |
| Height H (Metric) | 7.7 |
| Cable Tie Width Max (Imperial) | 0.5 |
| Cable Tie Width Max (Metric) | 12.7 |
| Material | Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV) |
| Material Shortcut | PA66HIRHSUV |
| Adhesive | Acrylic foam |

| | |
|--------------------------------|-----------------------------------|
| Flammability | UL 94 HB |
| UV Resistant (Yes/No) | Yes |
| Adhesive Operating Temperature | -40°F to +176°F (-40°C to +80°C) |
| Operating Temperature | -40°F to +221°F (-40°C to +105°C) |
| Reach Compliant (Article 33) | No |
| ROHS Compliant | Yes |
| Package Quantity (Imperial) | 100 |
| Package Quantity (Metric) | 100 |
| Customs Number | 3926909988 |