


# Product data sheet

Specifications

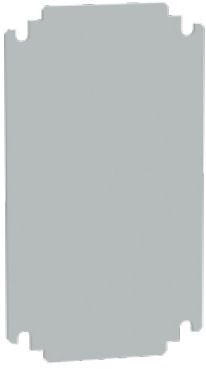

## Insulating mounting plate for enclosure H300xW200mm made of polyester

NSYMPP32

### Main

Range	Spacial
Accessory / separate part category	Mounting accessory
Product or component type	Mounting plate
Device application	Multi-purpose
Enclosure nominal dimensions	-
Mounting location	Step slide Direct fixing on backstuds
Mounting plate description	Plain
Range compatibility	Spacial (Spacial S3D) Spacial (Spacial CRN) Spacial (Spacial S3X) Thalassa (Thalassa PLM)
Quantity per set	Set of 1
Material	Fibreglass reinforced polyester
Colour	Grey (RAL 7035)

### Complementary

Fixing mode	Screwed on backstuds - screw type M8 By fixing element
Permanent permissible load	15 kg
Height	265 mm nominal: 300 mm enclosure nominal dimension:
Width	150 mm nominal: 200 mm enclosure nominal dimension:
Thickness	4 mm
Net weight	3 kg

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.4 cm
Package 1 Width	15.0 cm
Package 1 Length	26.5 cm

---

Package 1 Weight	286.0 g
------------------	---------

## Offer Sustainability

---

Sustainable offer status	Green Premium product
--------------------------	-----------------------

---

REACH Regulation	<a href="#">REACH Declaration</a>
------------------	-----------------------------------

---

REACH free of SVHC	Yes
--------------------	-----

---

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
-------------------	---

---

Toxic heavy metal free	Yes
------------------------	-----

---

Mercury free	Yes
--------------	-----

---

China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
-----------------------	---

---

RoHS exemption information	<a href="#">Yes</a>
----------------------------	---------------------

---

Environmental Disclosure	<a href="#">Product Environmental Profile</a>
--------------------------	---

## Contractual warranty

---

Warranty	18 months
----------	-----------

Recommended replacement(s)