




INSULATION DISPLACEMENT CABLE
.050" PITCH, 26 AWG, 7/34 STRANDED EXTRUDED FEP

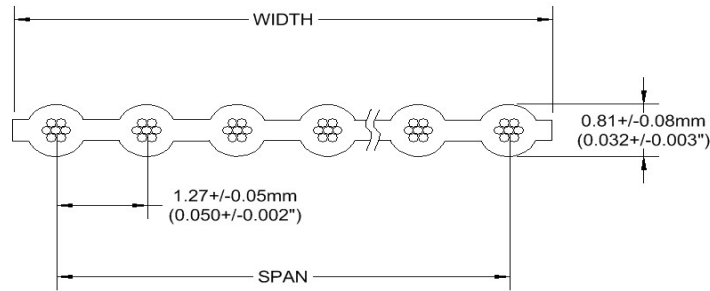

| Cond. No. | Part Number | Span | Width |
|-----------|-------------|--------------|--------------|
| 2 | 1000570382 | 0.050 ± .002 | 0.100 ± .005 |
| 3 | 1000570384 | 0.100 ± .005 | 0.150 ± .007 |
| 4 | 1000570113 | 0.150 ± .005 | 0.200 ± .007 |
| 4 | 1000570114 | 0.150 ± .005 | 0.200 ± .007 |
| 5 | 1000570116 | 0.200 ± .005 | 0.250 ± .007 |
| 6 | 1000570120 | 0.250 ± .005 | 0.300 ± .007 |
| 6 | 1000570444 | 0.250 ± .005 | 0.300 ± .007 |
| 8 | 1000570122 | 0.350 ± .005 | 0.400 ± .007 |
| 8 | 1000570123 | 0.350 ± .005 | 0.400 ± .007 |
| 9 | 1000570457 | 0.400 ± .007 | 0.450 ± .007 |
| 10 | 1000570094 | 0.450 ± .007 | 0.500 ± .007 |
| 10 | 1000570095 | 0.450 ± .007 | 0.500 ± .007 |
| 12 | 1000570096 | 0.550 ± .007 | 0.600 ± .007 |
| 14 | 1000570097 | 0.650 ± .007 | 0.700 ± .007 |
| 15 | 1000570439 | 0.700 ± .007 | 0.750 ± .007 |
| 16 | 1000570098 | 0.750 ± .007 | 0.800 ± .007 |
| 16 | 1000570099 | 0.750 ± .007 | 0.800 ± .007 |
| 20 | 1000570101 | 0.950 ± .010 | 1.000 ± .010 |
| 20 | 1000570102 | 0.950 ± .010 | 1.000 ± .010 |
| 24 | 1000570105 | 1.150 ± .010 | 1.200 ± .010 |
| 24 | 1000570519 | 1.150 ± .010 | 1.200 ± .010 |
| 25 | 1000570106 | 1.200 ± .010 | 1.250 ± .010 |
| 26 | 1000570107 | 1.250 ± .010 | 1.300 ± .010 |
| 26 | 1000570108 | 1.250 ± .010 | 1.300 ± .010 |
| 30 | 1000570110 | 1.450 ± .010 | 1.500 ± .010 |
| 34 | 1000570111 | 1.650 ± .010 | 1.700 ± .010 |
| 37 | 1000570441 | 1.800 ± .010 | 1.850 ± .010 |
| 40 | 1000570112 | 1.950 ± .010 | 2.000 ± .010 |
| 50 | 1000570115 | 2.450 ± .010 | 2.500 ± .010 |
| 60 | 1000570118 | 2.950 ± .015 | 3.000 ± .015 |
| 64 | 1000570121 | 3.150 ± .015 | 3.200 ± .015 |

| CHARACTERISTICS | |
|------------------------------|---------------------------------------------|
| Conductor | 26 AWG, 7/34 Stranded, Silver Plated Copper |
| Insulation | FEP |
| Color | Green, (Optional: Rainbow, 0.035+/-0.003") |
| Impedance (ohms) | 100 Unbalanced |
| Capacitance (pF/ft) | 12.0 Unbalanced |
| Inductance (uH/ft) | 0.12 Unbalanced |
| Insulation Resistance (Mohm) | >500 |
| Voltage Rating | 300V |
| Temperature Rating | -55°C to 200°C |

PACKAGING
 100 ft./Spool, 10 Ft. minimum length

UL Style 20424