


HZ0201A601R-11

PHYSICAL DIMENSIONS:

A	0.60 [.024]	+ -	0.03 [.001]
B	0.30 [.012]	+ -	0.05 [.002]
C	0.30 [.012]	+ -	0.05 [.002]
D	0.15 [.006]	+ -	0.05 [.002]


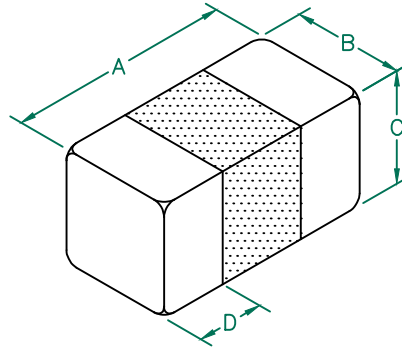


ELECTRICAL CHARACTERISTICS:


	Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	600		
Minimum	450		
Maximum	750	1.70	100 mA

NOTES: UNLESS OTHERWISE SPECIFIED


1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 15,000 PCS/REEL, PAPER TAPE.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
4. OPERATING TEMPERATURE TEMP: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ (INCLUDING SELF-HEATING)
5. COSMETIC SPECIFICATION REFER TO WI-QA-124.

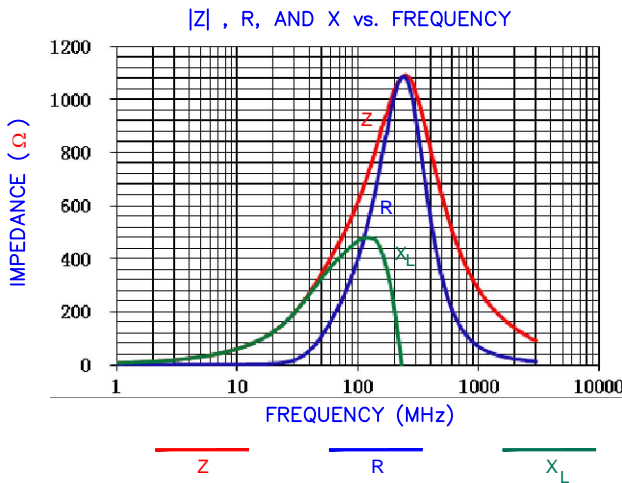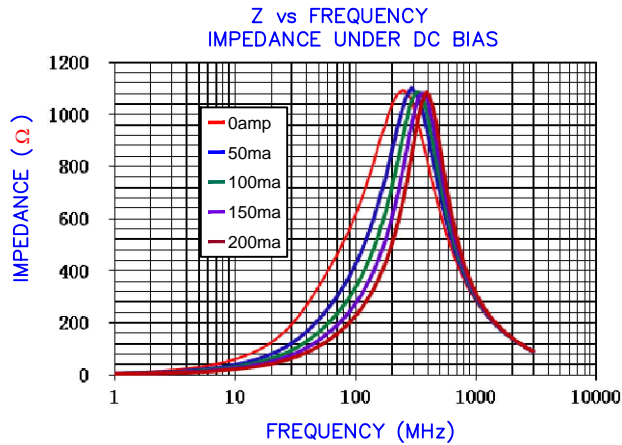

LAND PATTERNS FOR REFLOW SOLDERING



RECOMMENDED SOLDERING CONDITIONS

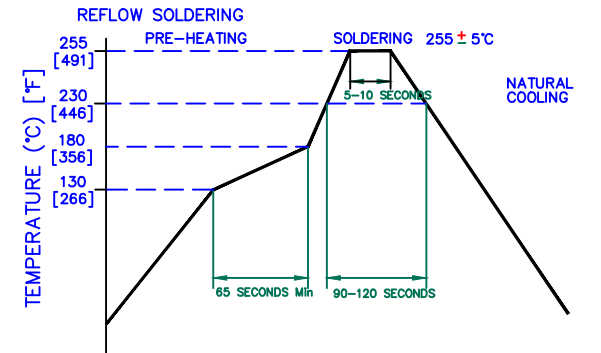

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
PROJECT/PART NUMBER:				REV	PART TYPE:	DRAWN BY:	
HZ0201A601R-11				A	CO-FIRE	QU	
DATE:				SCALE:	SHEET:		
08/22/14				NTS	1 of 1		
A	ORIGINAL DRAFT	08/22/14	QU	CAD #	HZ0201A601R-11-A		TOOL #
REV	DESCRIPTION	DATE	INT				