


Washer Face Thumb Screws

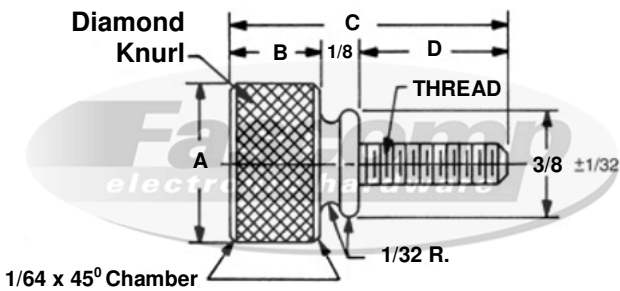

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX
<hr style="border: none; border-top: 1px solid black; margin-bottom: 5px;"/> <hr style="border: none; border-top: 1px solid black; margin-bottom: 5px;"/> <hr style="border: none; border-top: 1px solid black; margin-bottom: 5px;"/>		

Length Table						
FCXXXX	Thread	A	B	C	D	
		+020 -000	+015 -015	+015 -015	+010 -010	
FC7100	4-40	3/8	3/16	5/8	5/16	
FC7101	4-40	3/8	3/16	11/16	3/8	
FC7102	4-40	3/8	3/16	3/4	7/16	
FC7103	6-32	3/8	3/16	11/16	3/8	
FC7104	6-32	3/8	3/16	3/4	7/16	
FC7105	6-32	3/8	3/16	13/16	1/2	
FC7106	8-32	7/16	3/16	11/16	3/8	
FC7107	8-32	7/16	3/16	13/16	1/2	
FC7108	8-32	7/16	3/16	15/16	5/8	
FC7109	10-32	7/16	3/16	11/16	3/8	
FC7110	10-32	7/16	3/16	13/16	1/2	
FC7111	10-32	7/16	3/16	15/16	5/8	
FC7112	1/4-20	1/2	1/4	3/4	3/8	
FC7113	1/4-20	1/2	1/4	7/8	1/2	
FC7114	1/4-20	1/2	1/4	1	5/8	
FC7115	1/4-20	1/2	1/4	1-1/8	3/4	

Material		
Material Code (XX)		
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel

Compatible Finish (XX)		
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware