


6748.2 EG-ZMA/24 VACDC 0,1-1s

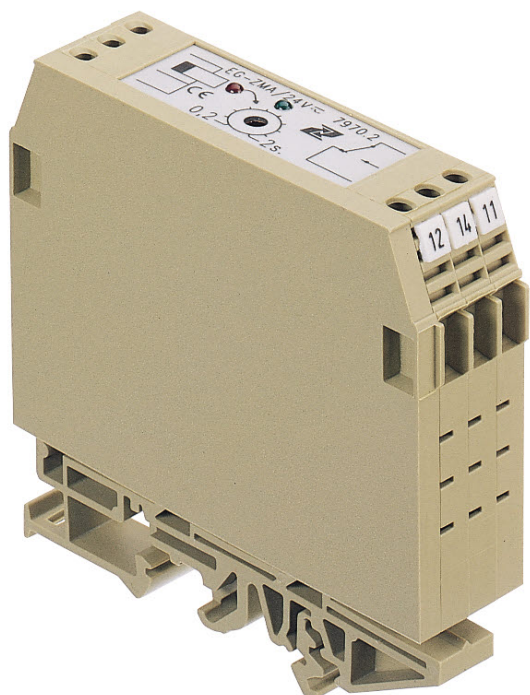

Drop-out delay timing relay, time range: 0.1 s to 1 s, Screw connection, Mounting type: Mounting rail TS 35, 1 CO contact, Supply voltage: 24 VAC/DC

Business data

Article number	6748.2
Article name	EG-ZMA/24 VACDC 0,1-1s
GTIN (EAN)	4044211075705
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	72.6 g
Weight per piece (including packaging)	82.89 g
Unit of weight	G
Customs number	85364900
Country of origin	NL
Product description	Timing relay

6748.2 EG-ZMA/24 VACDC 0,1-1s

Technical data

Dimensions

Length	78 mm
Width	22.5 mm
Height TS 35 / 7.5 with BA	84 mm

Ratings

Overvoltage category	III
Contamination degree	2

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	2.5 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	7 mm

Input data

Power supply AC/DC	24 V
--------------------	------

Output data

Relay contact	1 CO contact
---------------	--------------

Materials

Working temperature, max.	50 °C
---------------------------	-------

Further technical data

Protection class	IP20
Status display	✓

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-01-17
REACH Candidate Substance Note	No
RoHS Conform	yes

Media

Accessories
