

Data sheet

16117.2 WE-SUNBLIND



Webeasy I/O blinds control module, 4 digital inputs, 2 relay outputs, If the bus connection fails, the outputs switch to preset, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

Business data

Article number	16117.2
Article name	WE-SUNBLIND
GTIN (EAN)	4044211207601
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	150 g
Weight per piece (including packaging)	190 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

Technical data

Dimensions

Length	95 mm
Width	71 mm
Height	60 mm

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	6 mm
Torque	0.4 Nm


Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-01-17
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

16117.2 WE-SUNBLIND

Media

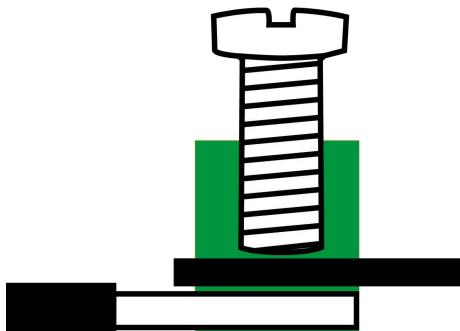

di1	di2	OV	L1	⊕	N
			230V IN		
			WIELAND GST18/ SCREW (-ST)		
INTERNAL BUS	A1				A1 - C
INTERNAL BUS	A2				A2 - C
INTERNAL BUS	A				A - C
INTERNAL BUS	B				B - C
			WIELAND GST18/ SCREW (-ST)		
			230V OUTPUT		
			1	⊕	N 2

Accessories
