

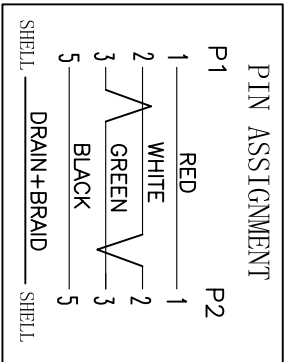


UNIT:mm

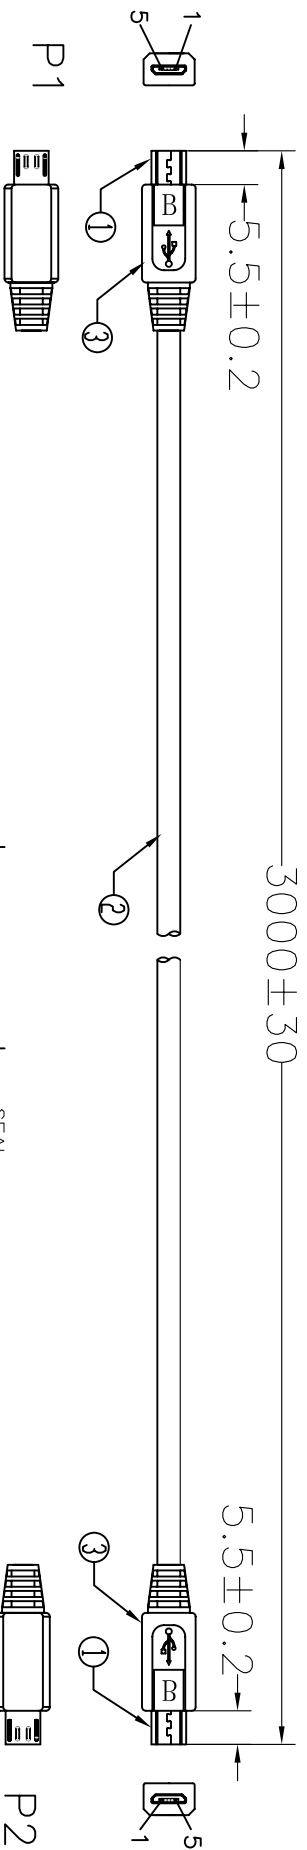

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10M Ohm(min)  
 4. dielectric test: DC 300V

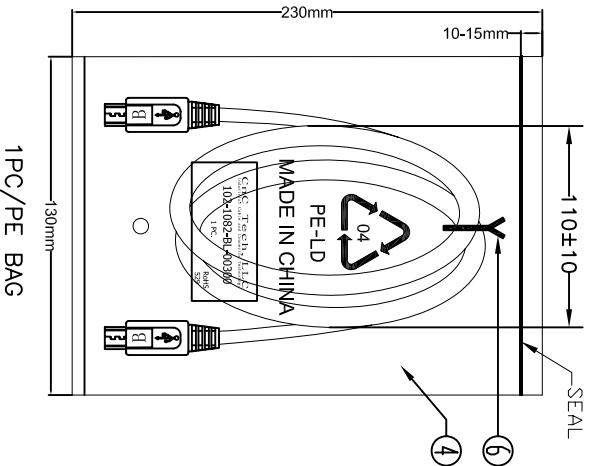

NO.	TIE	Q'TY	NAME	SPECIFICATION
⑥	1	1	BLACK L=80mm	
⑤	1/10		CLEAR SIZE: 280*330*0.05mm PRINT BLACK*MADE IN CHINA*+10PCS*及印生产周期,有透气孔.	
④	1		CLEAR SIZE: 130*230*0.05mm PRINT BLACK*MADE IN CHINA*+1PC*及印生产周期,有透气孔.	
③	12g		BLACK PVC-40P (MOULD NO:MM-116)	
②	1		USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm L=3000±10mm	
①	2		MICRO USB 5P B/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK	

**CNC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1082-BL-00300
DECIDED		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	

4

3

2

1

A

B

C

D

A

B

C

D