
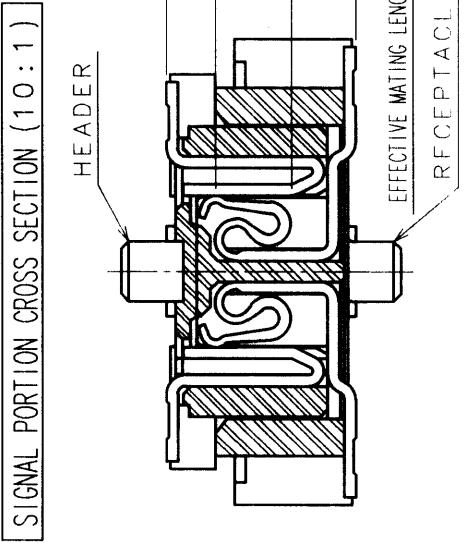


RECOMMENDED LAND PATTERN DIMENSION OF PCB

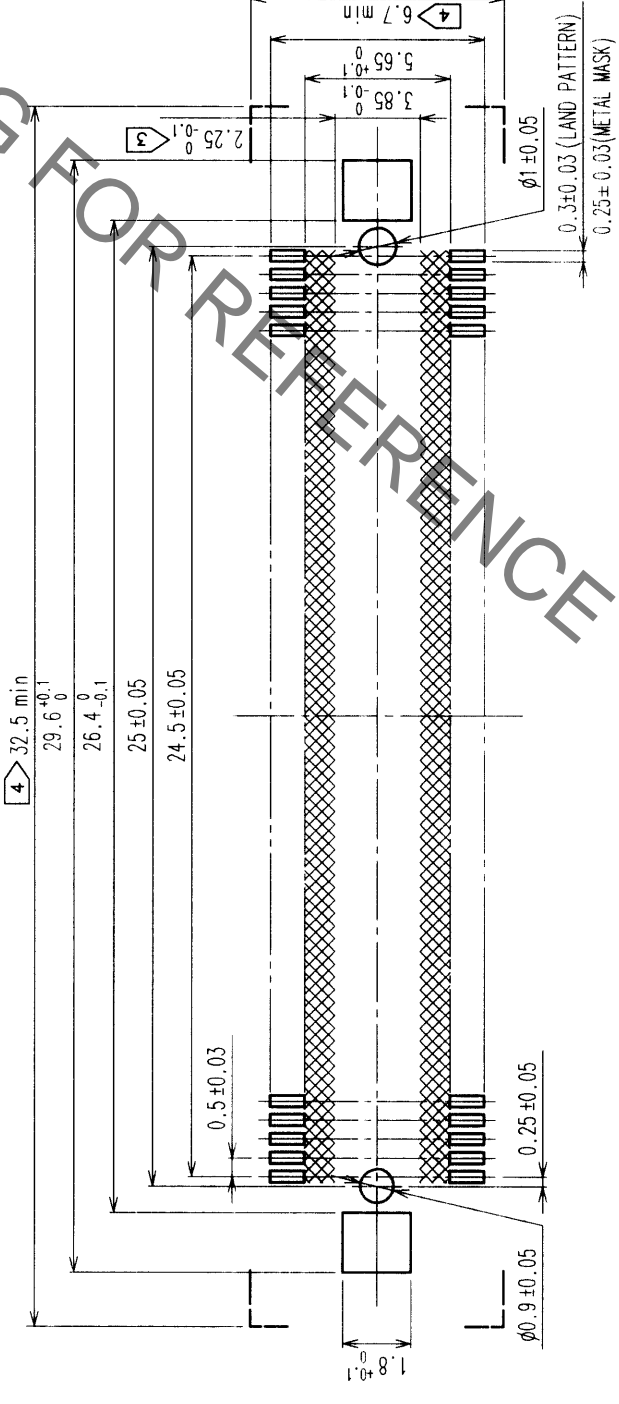

HRS DRAWING FOR REFERENCE

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
  - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
  - 4 DO NOT MOUNT OTHER DEVICES ONTO [ ] AREA, OR MATING PAIR CANNOT BE MATED.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	RE-F-06721	J.M	H.O	00.04.06					

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL LEAD: GOLD FLASH OVER NICKEL						
1	LCP	BEIGE UL94V-0						
NO. MATERIAL FINISH, REMARKS		3 PHOSPHOR BRONZE TIN PLATED						
CODE NO. (OLD)	CL							
DRAWN	J. MATSUKAWA	DESIGNED	M. ISHIDA	CHECKED	Y. YOSHIMURA	APPROVED		RELEASED
	00.01.15		00.01.15		00.01.17		00.01.17	
DRAWING NO. EDC3-152606		PART NO. FX11A-100P-SV						
SCALE 5 : 1		CODE NO. CL573-0543-7						
UNITS mm		HIROSE ELECTRIC CO., LTD.						

TO	
PCK	