## SIEMENS

## Data sheet

## US2:87JUH6LC



Pump control panel, Size 4, Three phase full voltage, Solid-state overload relay, OLR amp range 50-200A, 220-240/440-480VAC 60Hz coil, Standard type contactor, 200A fusible disconnect, 200A/250V fuse clip, HOA Sel Sw. <(>&<)> Start P.B., Enclosure NEMA type 3/3R, Weather proof outdoor use


|  | simi |  |
|--|------|--|
|  |      |  |
|  |      |  |

| product brand name  | Class 87  |
|---|---|
| design of the product   | Pump control panel with fused disconnect switch |
| special product feature   | ESP200 overload relay; Dual voltage coil        |
| General technical data  |   |
| weight [lb]   | 87 lb   |
| Height x Width x Depth [in]   | 41 × 24 × 8 in                                  |
| touch protection against electrical shock                               | NA for enclosed products                        |
| installation altitude [ft] at height above sea level maximum            | 6560 ft   |
| ambient temperature [°F]  |   |
| <ul> <li>during storage</li> </ul>                                      | -22 +149 °F                                     |
| <ul> <li>during operation</li> </ul>                                    | -4 +104 °F                                      |
| ambient temperature   |   |
| <ul> <li>during storage</li> </ul>                                      | -30 +65 °C                                      |
| <ul> <li>during operation</li> </ul>                                    | -20 +40 °C                                      |
| country of origin   | USA   |
| Horsepower ratings  |   |
| yielded mechanical performance [hp] for 3-phase AC motor                |   |
| • at 200/208 V rated value  | 40 hp   |
| • at 220/230 V rated value  | 50 hp   |
| • at 460/480 V rated value  | 0 hp  |
| • at 575/600 V rated value  | 0 hp  |
| Contactor   |   |
| size of contactor   | NEMA controller size 4                          |
| number of NO contacts for main contacts                                 | 3   |
| operating voltage for main current circuit at AC at 60 Hz maximum       | 240 V   |
| operational current at AC at 600 V rated value                          | 135 A   |
| mechanical service life (switching cycles) of the main contacts typical | 500000  |
| Auxiliary contact   |   |
| number of NC contacts at contactor for auxiliary contacts               | 0   |
| number of NO contacts at contactor for auxiliary contacts               | 1   |
| number of total auxiliary contacts maximum                              | 7   |
| contact rating of auxiliary contacts of contactor according to UL       | 10A@600VAC (A600), 5A@600VDC (P600)             |
| Coil  |   |
| type of voltage of the control supply voltage                           | AC  |
| control supply voltage  |   |

| <ul> <li>at DC rated value</li> </ul>   | 0 0 V  |
|---|--|
| <ul> <li>at AC at 50 Hz rated value</li> </ul>  | 0 0 V  |
| <ul> <li>at AC at 60 Hz rated value</li> </ul>  | 220 480 V  |
| holding power at AC minimum   | 22 W   |
| apparent pick-up power of magnet coil at AC   | 510 VA   |
| operating range factor control supply voltage rated value<br>of magnet coil   | 0.85 1.1   |
| percental drop-out voltage of magnet coil related to the input voltage  | 50 %   |
| ON-delay time   | 18 34 ms   |
| OFF-delay time  | 10 12 ms   |
| Overload relay  |  |
| product function  |  |
| overload protection   | Yes  |
| phase failure detection   | Yes  |
| asymmetry detection   | Yes  |
| ground fault detection  | Yes  |
| • test function   | Yes  |
| external reset  | Yes  |
| reset function  | Manual, automatic and remote   |
| trip class  | CLASS 5 / 10 (factory set) / 20 / 30   |
| adjustable current response value current of the current-   | 50 200 A   |
| dependent overload release  |  |
| tripping time at phase-loss maximum   | 3s   |
| relative repeat accuracy  | 1%   |
| product feature protective coating on printed-circuit board   | Yes  |
| number of NC contacts of auxiliary contacts of overload relay   | 1  |
| number of NO contacts of auxiliary contacts of overload<br>relay  | 1  |
| operational current of auxiliary contacts of overload relay   |  |
| • at AC at 600 V  | 5 A  |
| • at DC at 250 V  | 1 A  |
| contact rating of auxiliary contacts of overload relay according to UL  | 5A@600VAC (B600), 1A@250VDC (R300)   |
| insulation voltage (Ui)   |  |
| <ul> <li>with single-phase operation at AC rated value</li> </ul>   | 600 V  |
| <ul> <li>with multi-phase operation at AC rated value</li> </ul>  | 300 V  |
| Disconnect Switch   |  |
| response value of switch disconnector   | 200A / 250V  |
| design of fuse holder   | Class H fuse clips   |
| operating class of the fuse link  |  |
|   | Class H, K and R   |
| Enclosure   | Class H, K and R   |
| Enclosure   |  |
|   | Class H, K and R<br>NEMA Type 3R<br>Weather proof for outdoor use  |
| Enclosure<br>degree of protection NEMA rating of the enclosure<br>design of the housing   | NEMA Type 3R   |
| Enclosure<br>degree of protection NEMA rating of the enclosure<br>design of the housing<br>Standard Control Devices   | NEMA Type 3R<br>Weather proof for outdoor use  |
| Enclosure<br>degree of protection NEMA rating of the enclosure<br>design of the housing<br>Standard Control Devices<br>product component Hand-Off-Auto selector switch  | NEMA Type 3R<br>Weather proof for outdoor use<br>Yes   |
| Enclosure<br>degree of protection NEMA rating of the enclosure<br>design of the housing<br>Standard Control Devices<br>product component Hand-Off-Auto selector switch<br>type of Hand-Off-Auto selector switch   | NEMA Type 3R<br>Weather proof for outdoor use<br>Yes<br>30mm metal housing with matte finish   |
| Enclosure         degree of protection NEMA rating of the enclosure         design of the housing         Standard Control Devices         product component Hand-Off-Auto selector switch         type of Hand-Off-Auto selector switch         product component start push button  | NEMA Type 3R<br>Weather proof for outdoor use<br>Yes<br>30mm metal housing with matte finish<br>Yes  |
| Enclosure         degree of protection NEMA rating of the enclosure         design of the housing         Standard Control Devices         product component Hand-Off-Auto selector switch         type of Hand-Off-Auto selector switch         product component start push button         type of start push button  | NEMA Type 3R<br>Weather proof for outdoor use<br>Yes<br>30mm metal housing with matte finish   |
| Enclosure<br>degree of protection NEMA rating of the enclosure<br>design of the housing<br>Standard Control Devices<br>product component Hand-Off-Auto selector switch<br>type of Hand-Off-Auto selector switch<br>product component start push button<br>type of start push button<br>Mounting/wiring  | NEMA Type 3R<br>Weather proof for outdoor use<br>Yes<br>30mm metal housing with matte finish<br>Yes<br>30mm metal housing with matte finish  |
| Enclosure         degree of protection NEMA rating of the enclosure         design of the housing         Standard Control Devices         product component Hand-Off-Auto selector switch         type of Hand-Off-Auto selector switch         product component start push button         type of start push button         Mounting/wiring         mounting position  | NEMA Type 3R<br>Weather proof for outdoor use<br>Yes<br>30mm metal housing with matte finish<br>Yes<br>30mm metal housing with matte finish  |
| Enclosure         degree of protection NEMA rating of the enclosure         design of the housing         Standard Control Devices         product component Hand-Off-Auto selector switch         type of Hand-Off-Auto selector switch         product component start push button         type of start push button         Mounting/wiring         mounting position         fastening method   | NEMA Type 3R<br>Weather proof for outdoor use<br>Yes<br>30mm metal housing with matte finish<br>Yes<br>30mm metal housing with matte finish<br>Vertical<br>Surface mounting and installation   |
| Enclosure         degree of protection NEMA rating of the enclosure         design of the housing         Standard Control Devices         product component Hand-Off-Auto selector switch         type of Hand-Off-Auto selector switch         product component start push button         type of start push button         Mounting/wiring         mounting position         fastening method         type of connectable conductor cross-sections at line-side   | NEMA Type 3R<br>Weather proof for outdoor use<br>Yes<br>30mm metal housing with matte finish<br>Yes<br>30mm metal housing with matte finish  |
| Enclosure         degree of protection NEMA rating of the enclosure         design of the housing         Standard Control Devices         product component Hand-Off-Auto selector switch         type of Hand-Off-Auto selector switch         product component start push button         type of start push button         Mounting/wiring         mounting position         fastening method         type of connectable conductor cross-sections at line-side         at AWG cables single or multi-stranded         temperature of the conductor for supply maximum  | NEMA Type 3R<br>Weather proof for outdoor use<br>Yes<br>30mm metal housing with matte finish<br>Yes<br>30mm metal housing with matte finish<br>Vertical<br>Surface mounting and installation<br>Box lug  |
| Enclosure         degree of protection NEMA rating of the enclosure         design of the housing         Standard Control Devices         product component Hand-Off-Auto selector switch         type of Hand-Off-Auto selector switch         product component start push button         type of start push button         Mounting/wiring         mounting position         fastening method         type of clectrical connection for supply voltage line-side         type of connectable conductor cross-sections at line-side         at AWG cables single or multi-stranded         temperature of the conductor for supply maximum         permissible | NEMA Type 3R         Weather proof for outdoor use         Yes         30mm metal housing with matte finish         Yes         30mm metal housing with matte finish         Vers         30mm metal housing with matte finish         Vertical         Surface mounting and installation         Box lug         1x (6 AWG 300 Kcmil)         75 °C                 |
| Enclosure         degree of protection NEMA rating of the enclosure         design of the housing         Standard Control Devices         product component Hand-Off-Auto selector switch         type of Hand-Off-Auto selector switch         product component start push button         type of start push button         Mounting/wiring         mounting position         fastening method         type of connectable conductor cross-sections at line-side         at AWG cables single or multi-stranded         temperature of the conductor for supply maximum         permissible         material of the conductor for supply                       | NEMA Type 3R         Weather proof for outdoor use         Yes         30mm metal housing with matte finish         Yes         30mm metal housing with matte finish         Yes         30mm metal housing with matte finish         Vertical         Surface mounting and installation         Box lug         1x (6 AWG 300 Kcmil)         75 °C         AL or CU |
| Enclosure         degree of protection NEMA rating of the enclosure         design of the housing         Standard Control Devices         product component Hand-Off-Auto selector switch         type of Hand-Off-Auto selector switch         product component start push button         type of start push button         Mounting/wiring         mounting position         fastening method         type of clectrical connection for supply voltage line-side         type of connectable conductor cross-sections at line-side         at AWG cables single or multi-stranded         temperature of the conductor for supply maximum         permissible | NEMA Type 3R<br>Weather proof for outdoor use<br>Yes<br>30mm metal housing with matte finish<br>Yes<br>30mm metal housing with matte finish<br>Vertical<br>Surface mounting and installation<br>Box lug<br>1x (6 AWG 300 Kcmil)<br>75 °C   |

| type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi-stranded   | 1x (6 AWG 250 MCM)                                  |  |  |
|---|---|--|--|
| temperature of the conductor for load-side outgoing feeder maximum permissible  | 75 °C   |  |  |
| material of the conductor for load-side outgoing feeder   | CU  |  |  |
| type of electrical connection of magnet coil  | Screw-type terminals                                |  |  |
| tightening torque [lbf·in] at magnet coil   | 5 12 lbf·in   |  |  |
| type of connectable conductor cross-sections of magnet<br>coil at AWG cables single or multi-stranded   | 2x (16 12 AWG)                                      |  |  |
| temperature of the conductor at magnet coil maximum permissible   | 75 °C   |  |  |
| material of the conductor at magnet coil  | CU  |  |  |
| type of electrical connection at contactor for auxiliary<br>contacts  | Screw-type terminals                                |  |  |
| tightening torque [lbf·in] at contactor for auxiliary contacts  | 10 15 lbf·in  |  |  |
| type of connectable conductor cross-sections at contactor<br>at AWG cables for auxiliary contacts single or multi-<br>stranded  | 1x (12 AWG), 2x (16 14 AWG), 2x (18 16 AWG)         |  |  |
| temperature of the conductor at contactor for auxiliary<br>contacts maximum permissible   | 75 °C   |  |  |
| material of the conductor at contactor for auxiliary contacts   | CU  |  |  |
| type of electrical connection at overload relay for auxiliary<br>contacts   | Screw-type terminals                                |  |  |
| tightening torque [lbf·in] at overload relay for auxiliary contacts   | 7 10 lbf·in   |  |  |
| type of connectable conductor cross-sections at overload<br>relay at AWG cables for auxiliary contacts single or multi-<br>stranded   | 2x (20 14 AWG)                                      |  |  |
| temperature of the conductor at overload relay for auxiliary contacts maximum permissible   | 75 °C   |  |  |
| material of the conductor at overload relay for auxiliary contacts  | CU  |  |  |
| Short-circuit current rating  |   |  |  |
| design of the fuse link for short-circuit protection of the<br>main circuit required  | 10kA@600V (Class H or K); 100kA@600V (Class R or J) |  |  |
| certificate of suitability  | NEMA ICS 2; UL 508                                  |  |  |
| Further information   |   |  |  |
| Industrial Controls - Product Overview (Catalogs, Brochures,)<br>www.usa.siemens.com/iccatalog  |   |  |  |
| Industry Mall (Online ordering system)<br>https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:87JUH6LC  |   |  |  |
| Service&Support (Manuals, Certificates, Characteristics, FAQs,)<br>https://support.industry.siemens.com/cs/US/en/ps/US2:87JUH6LC  |   |  |  |
| Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)<br>http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:87JUH6LC⟨=en |   |  |  |

Certificates/approvals https://support.industry.siemens.com/cs/US/en/ps/US2:87JUH6LC/certificate

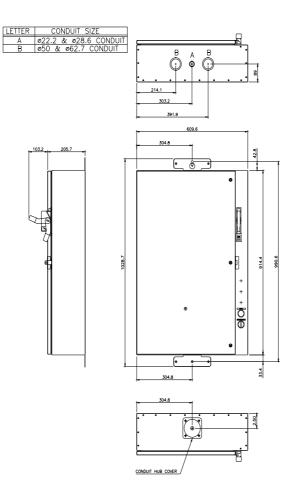

last modified:

1/8/2022 🖸