SIEMENS

Data sheet

3RA2110-0JE15-1AP0



Load feeder fuseless, Direct-on-line starting 400 V AC, Size S00 0.70...1.00 A 230 V AC Spring-type terminal for installation on standard mounting rail (also fulfills type of coordination 1) Type of coordination 2, Iq = 150 kA 1 NO (contactor)

product brand name	SIRIUS
product designation	Direct (on-line) starter
design of the product	for standard rail or screw mounting
product type designation	3RA21
manufacturer's article number	
of the supplied contactor	3RT2015-2AP01
 of the supplied circuit-breakers 	3RV2011-0JA20
 of the supplied link module 	3RA2911-2AA00
General technical data	
size of the circuit-breaker	S00
size of load feeder	S00
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
degree of protection NEMA rating	other
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (switching cycles) of contactor typical	30 000 000
type of assignment	2
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
ambient temperature	
 during operation 	-20 +60 °C
 during storage 	-50 +80 °C
during transport	-50 +80 °C
temperature compensation	-20 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current-dependent overload release	0.7 1 A
operating voltage	
• rated value	690 V
• at AC-3 rated value maximum	690 V
operating frequency rated value	50 60 Hz

operational current at AC-3 at 400 V rated value	0.85 A
operating power at AC-3	
 at 400 V rated value 	250 W
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
 at 50 Hz rated value 	230 V
 at 50 Hz rated value 	230 230 V
 at 60 Hz rated value 	230 V
 at 60 Hz rated value 	230 230 V
apparent holding power of magnet coil at AC	4.2 VA
Auxiliary circuit	
product extension auxiliary switch	Yes
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal (bimetallic)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	1 A
yielded mechanical performance [hp]	
• for 3-phase AC motor	
— at 575/600 V rated value	0.5 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
conditional short-circuit current (Iq)	magnetic
• at 400 V according to IEC 60947-4-1 rated value	150 000 A
Installation/ mounting/ dimensions	100 000 /1
	vertical
mounting position fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
lastering method	Screw and Shap-on mounting onto 33 min standard mounting rail
height	198 mm
height width	198 mm 45 mm
height width depth	198 mm
height width depth required spacing	198 mm 45 mm
height width depth required spacing • for grounded parts	198 mm 45 mm 97 mm
height width depth required spacing • for grounded parts — forwards	198 mm 45 mm 97 mm
height width depth required spacing • for grounded parts — forwards — backwards	198 mm 45 mm 97 mm 20 mm 0 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 20 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 20 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 20 mm 10 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 20 mm 10 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 20 mm 10 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — upwards	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 10 mm 10 mm 0 mm 50 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards — downwards — torwards — torwards — backwards — at the side — downwards — at the side	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 20 mm 10 mm 50 mm 10 mm 50 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — at the side — downwards — for live parts — forwards — backwards — backwards — upwards — at the side Connections/ Terminals	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 20 mm 10 mm 50 mm 10 mm 50 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards — downwards — torwards — torwards — backwards — at the side — downwards — at the side	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 10 mm 0 mm 50 mm 10 mm 10 mm 50 mm 20 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards — upwards — torwards — backwards — at the side Connections/ Terminals type of electrical connection • for main current circuit	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 20 mm 10 mm 50 mm 0 mm 50 mm 0 mm 5 mm 5 mm 5
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards — upwards — torwards — outpeards — torwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 10 mm 0 mm 50 mm 10 mm 10 mm 50 mm 20 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards — upwards — downwards — the side Connections/ Terminals type of electrical connection • for auxiliary and control circuit Safety related data	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 20 mm 10 mm 20 mm 10 mm 20 mm 50 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards — upwards — downwards — townwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit Safety related data B10 value with high demand rate according to SN 31920	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 20 mm 10 mm 50 mm 0 mm 50 mm 0 mm 5 mm 5 mm 5
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards — upwards — downwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit Safety related data B10 value with high demand rate according to SN 31920 proportion of dangerous failures	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 10 mm 20 mm 10 mm 50 mm 10 mm 50 mm 10 mm 50 mm 10 mm 10 mm 10 mm 10 mm 10 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — backwards — upwards — downwards — the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit Safety related data B10 value with high demand rate according to SN 31920 proportion of dangerous failures • with high demand rate according to SN 31920	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 10 mm 10 mm 50 mm 20 mm 10 mm 50 mm 10 mm 50 mm 10 mm 50 mm 10 mm 10 mm 20 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — backwards — upwards — downwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit Safety related data B10 value with high demand rate according to SN 31920 proportion of dangerous failures • with high demand rate according to IEC 60529	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 20 mm 10 mm 20 mm 0 mm 50 mm 10 mm 50 mm 10 mm 50 mm 10 mm 10 mm 10 mm 10 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — backwards — upwards — downwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit Safety related data B10 value with high demand rate according to SN 31920 proportion of dangerous failures • with high demand rate according to IEC 60529 Communication/ Protocol	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 10 mm 10 mm 20 mm 0 mm 50 mm 10 mm 50 mm 10 mm 10 mm 50 mm 10 mm 10 mm 20 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — backwards — upwards — downwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit Safety related data B10 value with high demand rate according to SN 31920 proportion of dangerous failures • with high demand rate according to IEC 60529 Communication/ Protocol protocol is supported	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 10 mm 20 mm 10 mm 50 mm 20 mm 0 mm 50 mm 10 mm 50 mm 10 mm 10 mm 20 mm 10 mm 20 mm
height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — backwards — upwards — downwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit Safety related data B10 value with high demand rate according to SN 31920 proportion of dangerous failures • with high demand rate according to IEC 60529 Communication/ Protocol	198 mm 45 mm 97 mm 20 mm 0 mm 50 mm 10 mm 10 mm 20 mm 0 mm 50 mm 10 mm 50 mm 10 mm 10 mm 50 mm 10 mm 10 mm 20 mm

protocol is supported AS-Interface protocol

No

Certificates/ approvals

General Product Approval

For use in hazardous locations Declaration of Conformity



Confirmation



EAC





Declaration of Conformity

Test Certificates

Marine / Shipping



Type Test Certificates/Test Report

Special Test Certificate







Marine / Shipping

other

Railway









Confirmation

Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2110-0JE15-1AP0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2110-0JE15-1AP0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-0JE15-1AP0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2110-0JE15-1AP0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-0JE15-1AP0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2110-0JE15-1AP0&objecttype=14&gridview=view1

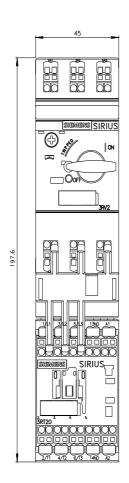

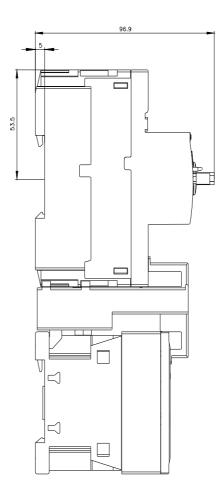

last modified: 2/16/2022 🖸