SIEMENS

Data sheet US2:18GUG92WD



Non-reversing motor starter, Size 2 1/2, Three phase full voltage, Solid-state overload relay, OLR amp range 25-100A, 208VAC 60Hz coil, Combination type, 100A circuit breaker, Encl NEMA type 4X 304 S-Steel, Water/dust tight noncorrosive, Standard width enclosure

Figure similar

product brand name	Class 18 & 26
design of the product	Full-voltage non-reversing motor starter with motor circuit protector
special product feature	ESP200 overload relay; Half-size controller
General technical data	
Height x Width x Depth [in]	24 × 20 × 8 in
touch protection against electrical shock	NA for enclosed products
installation altitude [ft] at height above sea level maximum	6560 ft
ambient temperature [°F]	
during storage	-22 +149 °F
 during operation 	-4 +104 °F
ambient temperature	
 during storage 	-30 +65 °C
 during operation 	-20 +40 °C
Horsepower ratings	
yielded mechanical performance [hp] for 3-phase AC motor	
• at 200/208 V rated value	15 hp
• at 220/230 V rated value	20 hp
• at 460/480 V rated value	30 hp
• at 575/600 V rated value	30 hp
Contactor	
size of contactor	Controller half size 2 1/2
number of NO contacts for main contacts	3
operating voltage for main current circuit at AC at 60 Hz maximum	600 V
operational current at AC at 600 V rated value	60 A
mechanical service life (switching cycles) of the main contacts typical	10000000
Auxiliary contact	
number of NC contacts at contactor for auxiliary contacts	0
number of NO contacts at contactor for auxiliary contacts	1
number of total auxiliary contacts maximum	7
contact rating of auxiliary contacts of contactor according to UL	10A@600VAC (A600), 5A@600VDC (P600)
Coil	
type of voltage of the control supply voltage	AC
control supply voltage	
at AC at 60 Hz rated value	208 V
holding power at AC minimum	8.6 W

	240.1/A
apparent pick-up power of magnet coil at AC	218 VA
apparent holding power of magnet coil at AC	25 VA
operating range factor control supply voltage rated value of magnet coil	0.85 1.1
percental drop-out voltage of magnet coil related to the input voltage	50 %
ON-delay time	19 29 ms
OFF-delay time	10 24 ms
Overload relay	
reset function	Manual, automatic and remote
trip class	CLASS 5 / 10 / 20 (factory set) / 30
adjustable current response value current of the current- dependent overload release	25 100 A
make time with automatic start after power failure maximum	3 s
relative repeat accuracy	1 %
number of NC contacts of auxiliary contacts of overload relay	1
number of NO contacts of auxiliary contacts of overload relay	1
operational current of auxiliary contacts of overload relay	
• at AC at 600 V	5 A
• at DC at 250 V	1 A
contact rating of auxiliary contacts of overload relay according to UL	5A@600VAC (B600), 1A@250VDC (R300)
insulation voltage (Ui)	
 with single-phase operation at AC rated value 	600 V
 with multi-phase operation at AC rated value 	300 V
Enclosure	
degree of protection NEMA rating	4X, 304 stainless steel
design of the housing	dustproof, waterproof & resistant to corrosion
Circuit Breaker	
type of the motor protection	Motor circuit protector (magnetic trip only)
type of the motor protection operational current of motor circuit breaker rated value	Motor circuit protector (magnetic trip only) 100 A
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit	100 A
operational current of motor circuit breaker rated value adjustable current response value current of	100 A
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit	100 A
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring	100 A 315 1000 A
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position	100 A 315 1000 A Vertical
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method	100 A 315 1000 A Vertical Surface mounting and installation
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side	100 A 315 1000 A Vertical Surface mounting and installation Box lug
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG)
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi-	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf·in
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi- stranded temperature of the conductor for load-side outgoing feeder	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG)
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi- stranded temperature of the conductor for load-side outgoing feeder maximum permissible	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG)
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi- stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf·in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi- stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor cross-sections of magnet	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf·in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf·in
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor cross-sections of magnet coil at AWG cables single or multi-stranded temperature of the conductor at magnet coil maximum	Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG)
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi- stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor cross-sections of magnet coil at AWG cables single or multi-stranded temperature of the conductor at magnet coil maximum permissible	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG)
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi- stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf·in] at magnet coil type of connectable conductor cross-sections of magnet coil at AWG cables single or multi-stranded temperature of the conductor at magnet coil maximum permissible material of the conductor at magnet coil maximum permissible	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG) 75 °C CU
operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi- stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf·in] at magnet coil type of connectable conductor cross-sections of magnet coil at AWG cables single or multi-stranded temperature of the conductor at magnet coil maximum permissible material of the conductor at magnet coil maximum permissible	100 A 315 1000 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG) 75 °C CU Screw-type terminals

at AWG cables for auxiliary contacts single or multi- stranded	
temperature of the conductor at contactor for auxiliary contacts maximum permissible	75 °C
material of the conductor at contactor for auxiliary contacts	CU
type of electrical connection at overload relay for auxiliary contacts	Screw-type terminals
tightening torque [lbf·in] at overload relay for auxiliary contacts	7 10 lbf·in
type of connectable conductor cross-sections at overload relay at AWG cables for auxiliary contacts single or multi-stranded	2x (20 14 AWG)
temperature of the conductor at overload relay for auxiliary contacts maximum permissible	75 °C
material of the conductor at overload relay for auxiliary contacts	CU
Short-circuit current rating	
design of the short-circuit trip	Instantaneous trip circuit breaker
breaking capacity maximum short-circuit current (Icu)	
• at 240 V	100 kA
• at 480 V	100 kA
• at 600 V	25 kA
certificate of suitability	NEMA ICS 2; UL 508; CSA 22.2, No.14
Further information	

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:18GUG92WD


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/US/en/ps/US2:18GUG92WD

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:18GUG92WD&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:18GUG92WD/certificate

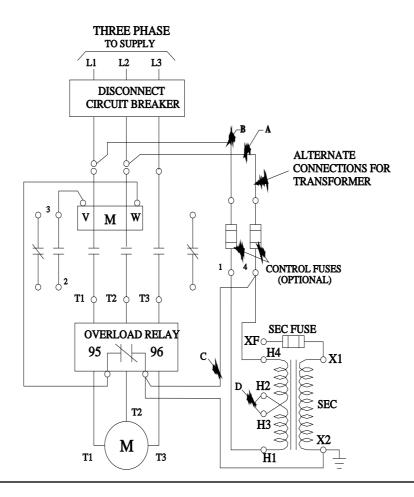

last modified: 1/25/2022 🖸