SIEMENS

Data sheet

3RT2027-1AU20



Power contactor, AC-3 32 A, 15 kW / 400 V 1 NO + 1 NC, 380 V AC 50/60 Hz, 3-pole Size S0, screw terminals

product brand name	SIRIUS			
product designation	Power contactor			
product type designation	3RT2			
General technical data				
size of contactor	S0			
product extension				
 function module for communication 	No			
auxiliary switch	Yes			
power loss [W] for rated value of the current				
 at AC in hot operating state 	6.3 W			
 at AC in hot operating state per pole 	2.3 W			
 without load current share typical 	10.5 W			
insulation voltage				
 of main circuit with degree of pollution 3 rated value 	690 V			
 of auxiliary circuit with degree of pollution 3 rated value 	690 V			
surge voltage resistance				
 of main circuit rated value 	6 kV			
 of auxiliary circuit rated value 	6 kV			
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	400 V			
shock resistance at rectangular impulse				
at AC	8,3g / 5 ms, 5,3g / 10 ms			
shock resistance with sine pulse				
• at AC	13,5g / 5 ms, 8,3g / 10 ms			
mechanical service life (switching cycles)				
 of contactor typical 	10 000 000			
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000			
 of the contactor with added auxiliary switch block typical 	10 000 000			
reference code according to IEC 81346-2	Q			
Substance Prohibitance (Date)	10/01/2009			
Ambient conditions				
installation altitude at height above sea level maximum	2 000 m			
ambient temperature				
 during operation 	-25 +60 °C			
during storage	-55 +80 °C			
relative humidity minimum	10 %			
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %			

Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
 at AC-3 rated value maximum 	690 V
 at AC-3e rated value maximum 	690 V
operational current	
 at AC-1 at 400 V at ambient temperature 40 °C rated value 	50 A
● at AC-1	
 — up to 690 V at ambient temperature 40 °C rated value 	50 A
— up to 690 V at ambient temperature 60 °C rated value	42 A
• at AC-3	
— at 400 V rated value	32 A
— at 500 V rated value	32 A
— at 690 V rated value	21 A
• at AC-3e	
— at 400 V rated value	32 A
— at 500 V rated value	32 A
— at 690 V rated value	21 A
 at AC-4 at 400 V rated value 	22 A
 at AC-5a up to 690 V rated value 	44 A
 at AC-5b up to 400 V rated value 	26.5 A
• at AC-6a	
 up to 230 V for current peak value n=20 rated value 	30.8 A
 — up to 400 V for current peak value n=20 rated value 	30.8 A
— up to 500 V for current peak value n=20 rated value	27 A
 up to 690 V for current peak value n=20 rated value at AC-6a 	21 A
 at AC-ba up to 230 V for current peak value n=30 rated value 	20.5 A
 — up to 400 V for current peak value n=30 rated value 	20.5 A
 — up to 500 V for current peak value n=30 rated value 	18 A
— up to 690 V for current peak value n=30 rated value	18 A
minimum cross-section in main circuit at maximum AC-1 rated value	10 mm ²
operational current for approx. 200000 operating cycles at AC-4	
at 400 V rated value	12 A
• at 690 V rated value	12 A
operational current	
 at 1 current path at DC-1 	
— at 24 V rated value	35 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	5 A
— at 440 V rated value	1A
— at 600 V rated value	0.8 A
 with 3 current paths in series at DC-1 	

— at 24 V rated value	35 A				
— at 110 V rated value	35 A				
— at 220 V rated value	35 A				
— at 440 V rated value	2.9 A				
— at 600 V rated value	1.4 A				
 at 1 current path at DC-3 at DC-5 					
— at 24 V rated value	20 A				
— at 110 V rated value	2.5 A				
— at 220 V rated value	1 A				
— at 440 V rated value	0.09 A				
— at 600 V rated value	0.06 A				
 with 2 current paths in series at DC-3 at DC-5 					
— at 24 V rated value	35 A				
— at 110 V rated value	15 A				
— at 220 V rated value	3 A				
— at 440 V rated value	0.27 A				
— at 600 V rated value	0.16 A				
 with 3 current paths in series at DC-3 at DC-5 					
— at 24 V rated value	35 A				
— at 110 V rated value	35 A				
— at 220 V rated value	10 A				
— at 440 V rated value	0.6 A				
— at 600 V rated value	0.6 A				
operating power					
at AC-2 at 400 V rated value	15 kW				
● at AC-3					
— at 230 V rated value	7.5 kW				
— at 400 V rated value	15 kW				
— at 500 V rated value	15 kW				
— at 690 V rated value	18.5 kW				
• at AC-3e					
— at 230 V rated value	7.5 kW				
— at 400 V rated value	15 kW				
— at 500 V rated value	15 kW				
— at 690 V rated value	18.5 kW				
operating power for approx. 200000 operating cycles					
at AC-4					
• at 400 V rated value	6 kW				
• at 690 V rated value	10.3 kW				
operating apparent power at AC-6a					
• up to 230 V for current peak value n=20 rated value	12.2 kVA				
• up to 400 V for current peak value n=20 rated value	21.3 kVA				
• up to 500 V for current peak value n=20 rated value	23.3 kVA				
• up to 690 V for current peak value n=20 rated value	25 kVA				
operating apparent power at AC-6a					
• up to 230 V for current peak value n=30 rated value	8.1 kVA				
• up to 400 V for current peak value n=30 rated value	14.2 kVA				
• up to 500 V for current peak value n=30 rated value	15.5 kVA				
• up to 690 V for current peak value n=30 rated value	21.5 kVA				
short-time withstand current in cold operating state					
up to 40 °C					
 limited to 1 s switching at zero current maximum 	499 A; Use minimum cross-section acc. to AC-1 rated value				
 limited to 5 s switching at zero current maximum 	395 A; Use minimum cross-section acc. to AC-1 rated value				
 limited to 10 s switching at zero current maximum 	260 A; Use minimum cross-section acc. to AC-1 rated value				
 limited to 30 s switching at zero current maximum 	186 A; Use minimum cross-section acc. to AC-1 rated value				
 limited to 60 s switching at zero current maximum 	152 A; Use minimum cross-section acc. to AC-1 rated value				
no-load switching frequency					
• at AC	5 000 1/h				
operating frequency					
• at AC-1 maximum	1 000 1/h				
• at AC-2 maximum	750 1/h				

● at AC-3 maximum	750 1/h				
 at AC-3 maximum at AC-3e maximum 	750 1/h				
• at AC-4 maximum	250 1/h				
Control circuit/ Control					
type of voltage of the control supply voltage	AC				
control supply voltage at AC					
at 50 Hz rated value	380 V				
at 60 Hz rated value	380 V 380 V				
operating range factor control supply voltage rated					
value of magnet coil at AC					
• at 50 Hz	0.8 1.1				
• at 60 Hz	0.85 1.1				
apparent pick-up power of magnet coil at AC	-				
• at 50 Hz	81 VA				
• at 60 Hz	79 VA				
inductive power factor with closing power of the coil					
• at 50 Hz	0.72				
• at 60 Hz	0.74				
apparent holding power of magnet coil at AC					
• at 50 Hz	10.5 VA				
• at 60 Hz	8.5 VA				
inductive power factor with the holding power of the coil					
● at 50 Hz	0.25				
• at 60 Hz	0.28				
closing delay					
• at AC	8 40 ms				
opening delay					
• at AC	4 16 ms				
arcing time	10 10 ms				
control version of the switch operating mechanism	Standard A1 - A2				
Auxiliany aireuit					
Auxiliary circuit	1				
Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact	1				
number of NC contacts for auxiliary contacts	1				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum					
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15	1				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum	1 10 A 10 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15	1 10 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value	1 10 A 10 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value	1 10 A 10 A 3 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value	1 10 A 10 A 3 A 2 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 24 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value • at 60 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 40 V rated value • at 110 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 10 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 10 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 48 V rated value • at 48 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 10 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 10 A 10 A 2 A 1 A 10 A 2 A 1 A 10 A 2 A 1 A 2 A 1 A 1 A 1 A 1 A 1 A 1 A 1				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 48 V rated value • at 40 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 10 A 10 A 2 A 1 A 10				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 10 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 10 A 10 A 6 A 10 A 6 A 10				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 0 A 2 A 1 A 0.15 A				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 600 V rated value • at 48 V rated value • at 48 V rated value • at 48 V rated value • at 110 V rated value • at 110 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 600 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 10 A 10 A 6 A 10 A 1				
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value	1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 0 A 2 A 1 A 0.15 A				

• at 480 V rated value	27 A				
at 600 V rated value	27 A 27 A				
yielded mechanical performance [hp]					
• for single-phase AC motor					
— at 110/120 V rated value	2 hp				
— at 230 V rated value	5 hp				
• for 3-phase AC motor	5 ilp				
— at 200/208 V rated value	10 hp				
— at 220/230 V rated value					
— at 460/480 V rated value	10 hp 20 hp				
— at 575/600 V rated value	20 np 25 hp				
contact rating of auxiliary contacts according to UL	_ 25 hp A600 / P600				
Short-circuit protection					
design of the fuse link					
 for short-circuit protection of the main circuit 					
— with type of coordination 1 required	gG: 125A (690V,100kA), aM: 50A (690V,100kA), BS88: 125A (415V,80kA)				
— with type of assignment 2 required	gG: 50A (690V,100kA), aM: 25A (690V, 100kA), BS88: 50A (415V, 80kA)				
 for short-circuit protection of the auxiliary switch required 	gG: 10 A (500 V, 1 kA)				
Installation/ mounting/ dimensions					
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface				
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715				
 side-by-side mounting 	Yes				
height	85 mm				
width	45 mm				
depth	97 mm				
required spacing					
 with side-by-side mounting 					
— forwards	10 mm				
— upwards	10 mm				
— downwards	10 mm				
— at the side	0 mm				
 for grounded parts 					
— forwards	10 mm				
— upwards	10 mm				
— at the side	6 mm				
— downwards	10 mm				
 for live parts 					
— forwards	10 mm				
— upwards	10 mm				
— downwards	10 mm				
— at the side	6 mm				
Connections/ Terminals					
type of electrical connection					
 for main current circuit 	screw-type terminals				
 for auxiliary and control circuit 	screw-type terminals				
 at contactor for auxiliary contacts 	Screw-type terminals				
of magnet coil	Screw-type terminals				
type of connectable conductor cross-sections					
for main contacts					
— solid	2x (1 2.5 mm²), 2x (2.5 10 mm²)				
— solid or stranded	2x (1 2.5 mm²), 2x (2.5 10 mm²)				
 finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²				
at AWG cables for main contacts	2x (16 12), 2x (14 8)				
connectable conductor cross-section for main contacts					
• solid	1 10 mm²				
- 00m					

 stranded 			1 10 mm				
-	with core end processir	-	1 10 mm²				
	tor cross-section for	auxiliary					
 contacts solid or strande 	d		0 5 2 5 ~	0.5 2.5 mm ²			
	• finely stranded with core end processing type of connectable conductor cross-sections			0.5 2.5 mm²			
		ions					
-	for auxiliary contacts			$E_{mm^{2}}$ $2x(0.7)$	$E = 2 E mm^2$		
— solid or str		e e e i e e	2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)				
•	— finely stranded with core end processing			2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)			
	for auxiliary contacts		2x (20 16), 2x (18 14)				
section	led connectable cond	uctor cross					
 for main contact 	ts		16 8				
 for auxiliary con 			20 14				
Safety related data			20 11				
product function							
	eccording to IEC 60947	1 1	Yes				
			450 000				
	emand rate according t	0 311 3 1920	450 000				
proportion of dange		21020	40.9/				
	d rate according to SN		40 %				
-	nd rate according to SN		73 %				
31920	ow demand rate accord	aing to SN	100 FIT				
	T1 value for proof test interval or service life according to		20 у				
	protection class IP on the front according to IEC		IP20				
	the front according to	IEC 60529	finger-safe	for vertical cont	act from the front		
suitability for use	the none according to		finger-safe, for vertical contact from the front				
 safety-related s 	witching OEE		Yes				
	0		163	_			
Certificates/ approval		_	_	_			
General Product Ap	proval						
		O Firms His		-	KO		
SP M	CCC CCC	<u>Confirmatio</u>	<u>)11</u>	(UL)	KC	EAC	
EMC	Functional Safety/Safety of Machinery	Declaration of	of Conformity	1	Test Certificates		
RCM	<u>Type Examination</u> <u>Certificate</u>	UK CA		CE EG-Konf.	<u>Special Test Certific-</u> <u>ate</u>	<u>Type Test Certific-</u> ates/Test Report	
Marine / Shipping							
ABS	BUREAU VERITAS			Llovd's Register urs	RINA	RMRS	
other							



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2027-1AU20

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2027-1AU20

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2027-1AU20

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2027-1AU20&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2027-1AU20/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2027-1AU20&objecttype=14&gridview=view1







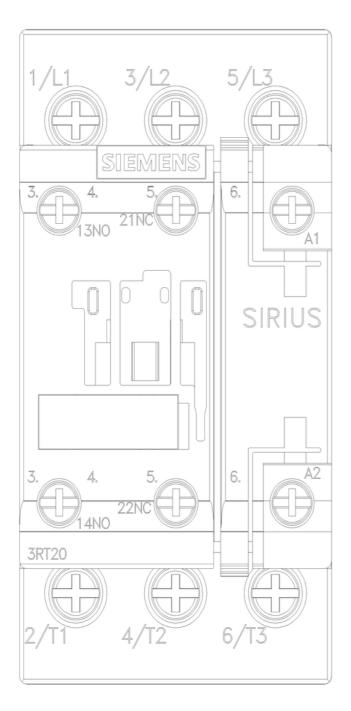

last modified:

6/2/2022 🖸