SIEMENS

Data sheet

3RA2115-1CA15-1AK6



Fuseless motor starter Direct start 600VAC Size S00 1.8-2.5A 110/120VAC 50/60HZ screw connection For screw mounting Or 35 mm rail-mounting Type of coordination 2 IQ = 150 KA Also full fills type Of coordination 1 1NO+1NC (MSP) 1NO (contactor)

product brand name	SIRIUS				
product designation	non-fused motor starter 3RA2				
design of the product	direct starter				
manufacturer's article number					
 of the supplied contactor 	<u>3RT2015-1AK61</u>				
 of the supplied circuit-breakers 	<u>3RV2011-1CA15</u>				
of the supplied link module	3RA1921-1DA00				
General technical data					
size of the circuit-breaker	S00				
size of load feeder	S00				
product extension auxiliary switch	Yes				
insulation voltage with degree of pollution 3 at AC rated value	690 V				
degree of pollution	3				
surge voltage resistance rated value	6 kV				
shock resistance according to IEC 60068-2-27	6g / 11 ms				
mechanical service life (switching cycles) of contactor typical	30 000 000				
type of assignment	2				
Ambient conditions					
ambient temperature					
 during operation 	-20 +60 °C				
 during storage 	-50 +80 °C				
during transport	-55 +80 °C				
Main circuit					
Main circuit					
Main circuit number of poles for main current circuit	3				
	3 electromechanical				
number of poles for main current circuit	-				
number of poles for main current circuit design of the switching contact adjustable current response value current of the	electromechanical				
number of poles for main current circuit design of the switching contact adjustable current response value current of the current-dependent overload release	electromechanical				
number of poles for main current circuit design of the switching contact adjustable current response value current of the current-dependent overload release operating voltage	electromechanical 1.8 2.5 A				
number of poles for main current circuit design of the switching contact adjustable current response value current of the current-dependent overload release operating voltage • rated value	electromechanical 1.8 2.5 A 690 V				
number of poles for main current circuit design of the switching contact adjustable current response value current of the current-dependent overload release operating voltage • rated value • at AC-3 rated value maximum	electromechanical 1.8 2.5 A 690 V 690 V				
number of poles for main current circuit design of the switching contact adjustable current response value current of the current-dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3	electromechanical 1.8 2.5 A 690 V 690 V 50 60 Hz 1.9 A				
number of poles for main current circuit design of the switching contact adjustable current response value current of the current-dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 • at 400 V rated value	electromechanical 1.8 2.5 A 690 V 690 V 50 60 Hz 1.9 A 750 W				
number of poles for main current circuit design of the switching contact adjustable current response value current of the current-dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value	electromechanical 1.8 2.5 A 690 V 690 V 50 60 Hz 1.9 A				
number of poles for main current circuit design of the switching contact adjustable current response value current of the current-dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 • at 400 V rated value	electromechanical 1.8 2.5 A 690 V 690 V 50 60 Hz 1.9 A 750 W				
number of poles for main current circuit design of the switching contact adjustable current response value current of the current-dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value	electromechanical 1.8 2.5 A 690 V 690 V 50 60 Hz 1.9 A 750 W				


a at 50 Lie rated walks	025 404 1/
at 50 Hz rated value	93.5 121 V
• at 60 Hz rated value	120 V
• at 60 Hz rated value	96 132 V
apparent holding power of magnet coil at AC	4.8 VA
inductive power factor with the holding power of the coil	0.25
Auxiliary circuit	
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	2
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal (bimetallic)
response value current of instantaneous short-circuit trip	32.5 A
unit	
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	2.15 A
at 600 V rated value	2.24 A
yielded mechanical performance [hp]	
for single-phase AC motor	0.47 hz
— at 230 V rated value	0.17 hp
for 3-phase AC motor	
— at 200/208 V rated value	0.5 hp
— at 220/230 V rated value	0.5 hp
— at 460/480 V rated value	1 hp
— at 575/600 V rated value	1.5 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
conditional short-circuit current (Iq)	
• at 400 V according to IEC 60947-4-1 rated value	153 000 A
• at 500 V according to IEC 60947-4-1 rated value	100 000 A
Installation/ mounting/ dimensions	
mounting position	vertical
fastening method	Snap-mounted to DIN rail or screw-mounted with additional push-in lug
height	167.2 mm
width	45 mm
depth	97.1 mm
required spacing	
for grounded parts	
— forwards	0 mm
— backwards	0 mm
— upwards	20 mm
— at the side	9 mm
— downwards	10 mm
for live parts forwards	0 mm
— forwards	0 mm
— backwards	0 mm
1100WC41105	
— upwards	20 mm
— downwards	10 mm
— downwards — at the side	
 downwards at the side Connections/ Terminals 	10 mm 9 mm
— downwards — at the side Connections/ Terminals type of electrical connection for main current circuit	10 mm
	10 mm 9 mm screw-type terminals
 downwards at the side Connections/ Terminals type of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts stranded 	10 mm 9 mm screw-type terminals 0.5 4 mm ² , 2x (0.75 2.5 mm ²)
 downwards at the side Connections/ Terminals type of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts stranded at AWG cables for main contacts 	10 mm 9 mm screw-type terminals 0.5 4 mm ² , 2x (0.75 2.5 mm ²) 2x (20 16), only for contactor 2x (18 14), 2x 12
 downwards at the side Connections/ Terminals type of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts stranded 	10 mm 9 mm screw-type terminals 0.5 4 mm ² , 2x (0.75 2.5 mm ²)
 downwards at the side Connections/ Terminals type of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts stranded at AWG cables for main contacts connectable conductor cross-section for main contacts connectable conductor cross-section for main contacts connectable conductor cross-section for main contacts 	10 mm 9 mm screw-type terminals 0.5 4 mm ² , 2x (0.75 2.5 mm ²) 2x (20 16), only for contactor 2x (18 14), 2x 12
 downwards at the side Connections/ Terminals type of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts stranded at AWG cables for main contacts connectable conductor cross-section for main contacts finely stranded with core end processing 	10 mm 9 mm screw-type terminals 0.5 4 mm ² , 2x (0.75 2.5 mm ²) 2x (20 16), only for contactor 2x (18 14), 2x 12

proportion of dangerous failures with high demand rate			73 %				
according to SN 31920 protection class IP on the front according to IEC			IP20				
60529 touch protection on the front according to IEC 60529			finger-safe, for vertical contact from the front				
Certificates/ approva							
General Product A			For use in hazard- ous locations	Declaration of Conformity			
	<u>Confirmation</u>	(ال س		EHC	KEx ATEX	CE EG-Konf.	
Declaration of Conformity	Test Certificates		Mari	ne / Shipping			
UK CA	<u>Special Test Certific-</u> <u>ate</u>	<u>Type Test Ce</u> ates/Test Re		ABS	B U REAU VERITAS	Lloyds Register uis	
Marine / Shipping					other	Railway	
PRS	RINA			DNV-GL	<u>Confirmation</u>	Vibration and Shock	
Further information Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system)							
Cax online generate	siemens.com/mall/en/en/ or ation.siemens.com/WW/C				_		
Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-1CA15-1AK6							

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2115-1CA15-1AK6&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-1CA15-1AK6/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2115-1CA15-1AK6&objecttype=14&gridview=view1

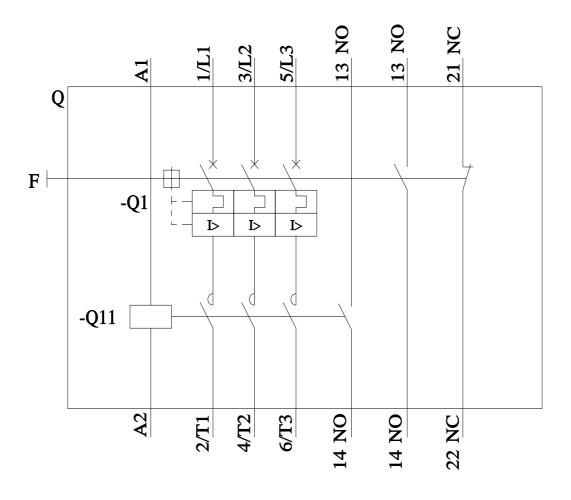

last modified:

12/15/2020 🖸